

TES-5424T

24 10/100TX+ 4 10/100/1000T L2+ EN50155 Managed Ethernet Switch w/

enhanced G.8032 Ring ; WV model

- EN50155/61373/45545-2 verification
- WV model works from 16.8V~137.5V
- Enhanced G.8032 ring protection <20ms for single ring. Supports auto mode, enhanced mode, train mode, multi-VLAN and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 16MSTI/RSTP ; support MRP ring**
- Built-in sensors for environmental monitoring on input voltage, current, switch temperature
- Optional bypass in case of power failure, watchdog loss
- Galvanic isolation between power input/Ethernet port to case ground; power input to Ethernet port
- Miss-wiring avoidance & node failure protection
- IP54 housing with small dimension to prevent from moisture / water ingress
- User friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82; Port based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3, TACACS+, QinQ, SMS**
- Protocol based VLAN** ; IPv4/IPv6 Subnet based VLAN**
- Optional InstaView** for centralized backup, editing the configuration file and upgrade firmware
- N-key configurator** for firmware auto upgrading, auto configuration back up and editable configuration restore



OVERVIEW

Lantech TES-5424T (IP54) is a high performance EN50155 L2+ (Gigabit uplink) Ethernet switch with 24 10/100TX+ 4 10/100/1000T by M12 provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports train ring, enhanced mode, multiple VLAN mode with easy configuration. The comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, TACACS+, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ are supported and also required in large network. It also supports 10K Jumbo frame.

Enhanced G.8032 ring, 16 MSTI MSTP; Optional MRP ring
 Lantech TES-5424T (P54) features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under enhanced ring), train ring, multiple-VLAN ring and auto-ring by easy setup than others. The innovative auto-Ring

configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows each spanning tree for each VLAN for redundant links with 16 MSTI.

Optional MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

QoS by VLAN for legacy devices to tag with priority

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

QinQ, QoS and GVRP supported

It supports the QinQ, QoS, GVRP for large VLAN segmentation.

IGMPv3, GMRP, router port, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring

EN50155 Managed Ethernet Switches

can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port and static multicast forwarding binding by ports for video surveillance application.

Miss-wiring avoidance, Loop protection, Auto re-powered ring restore

The TES-5424T (IP54) also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech TES-5424T (IP54) is able to alert with the LED indicator and disable ring automatically. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

DHCP option 82 & Port based, Mac based DHCP, Option66, IPv6 DHCP server**

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Optional IPv6 address resolution for DHCP service can be supported.

Editable configuration file; InstaView** for mass deployment

The configuration file of Lantech TES-5424T (IP54) can be exported and edited with word processor for the other switches configuration with ease. The factory reset button can restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead. With optional InstaView, the configuration files can be mass backup, mass-editable deployed and auto upgrading firmware in batch make maintenance easy. The optional N-key configurator offers firmware upgrade, auto/editable configuration back up and restoration without computer by adjusting the DIP switch.

User friendly UI, Auto topology drawing, complete CLI

The user friendly UI, innovative auto topology drawing and topology demo makes TES-5424T (IP54) much easier to get hands-on. The complete CLI enables professional engineer to

configure setting by command line.

DIDO w/email trap and SMS** alerting

In case of event alarm, the TES-5424T (IP54) will immediately send an email** & SMS** text message to pre-defined addresses as well as SNMP Traps out. It provides 1DI and 1DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

Galvanic isolation; wide dual input range model (WV)

The Lantech TES-5424T-WV model can take dual 16.8V~137.5V power input. It provides galvanic isolation protection from power input/Ethernet port to case ground and from power input to Ethernet port.

The TES-5424T (IP54) also provides ±2000V EFT and ±6000V ESD protection, which can reduce unstable situation caused by power line and Ethernet.

Built-in environmental monitoring to show switch inside info

The built-in environmental monitoring can detect switch overall temperature, input voltage and current and can send the SNMP traps, email** and SMS** alert when abnormal.

EN50155 for rolling stock, EN45545 fire and smoke verification

The TES-5424T (IP54) is designed to meet with critical network environment with IP54 aluminum enclosure and M12 connectors for water proof. It passed tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke, and EN50155 verification, the TES-5424T (IP54) is best for railway in train/track side, vehicle and mining applications. For more usage flexibilities, TES-5424T (IP54) supports wide operating temperature from -40°C to 75°C.


Optional bypass relay prevent from power lost

The optional bypass relay is set to bypass the switch to the next one in order to protect the network from crashing. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. (-B/-BB model)

FEATURES & BENEFITS

- | | |
|---|---|
| <ul style="list-style-type: none"> ■ 24 10/100TX+ 4 10/100/1000T EN50155 IP54 M12 Managed Ethernet Switch (Total 28 Ports Etherent Switch) ■ EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration verification ■ WV model can accept dual 16.8~137.5V power input ■ N-key** configurator for firmware auto upgrade, auto configuration back up and editable restoration ■ Back-plane (Switching Fabric): 12.8Gbps ■ 16K MAC address table ■ 10KB Jumbo frame supported ■ User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting ■ Enhanced G.8032 Ring protection in 20ms for single ring <ul style="list-style-type: none"> · Support various ring/chain topologies, including train ring, enhanced ring, basic ring, auto ring & multiple VLAN ring · Enhanced G.8032 ring configuration with ease · Auto ring configuration(auto mode) for single ring · Ring covers multicast on different ports · Train ring for auto coupling topology ■ Provides EFT protection ±2000 VDC for power line. ■ Supports ±4000 VDC (Contact) and ±8000 VDC (Air) Ethernet ESD protection ■ Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority ■ IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy 16 MSTI ■ 4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS ■ Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console/ Lantech™ InstaView** ■ DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Option 66; IPv6 address resolution for DHCP server** ■ Mac based DHCP server to assign IP address that includes dumb switches in DHCP network ■ Bandwidth Control <ul style="list-style-type: none"> · Ingress packet filter and egress rate limit · Broadcast/multicast packet filter control ■ Relay alarm output system events | <ul style="list-style-type: none"> ■ Miss-wiring avoidance <ul style="list-style-type: none"> · LED indicator ■ Repowered auto ring restore <ul style="list-style-type: none"> · Ensure the switches in a ring to survive after power breakout is back · The status can be shown in NMS when each switch is back ■ Configuration backup and restoration <ul style="list-style-type: none"> · Supports editable configuration file for system quick installation · InstaView** for centralized configuration deployment, backup & upgrade ■ TFTP/SFTP**/HTTP firmware upgrade; Lantech™ InstaView** for multiple upgrade ■ System Event Log, SMTP Email** alert, SMS** mobile (text) and SNMP Trap for alarm support; 32 RMON counters ■ Security <ul style="list-style-type: none"> · SSL/SSH/INGRESS/EGRESS ACL L2/L3 · Port Security: MAC address entries/Filter/MAC-Port binding · IP Security: IP address security management to prevent unauthorized intruder. · Login Security: IEEE802.1X/RADIUS · HTTPS for secure access to the web interface ■ Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application ■ Multicast static route for non-IGMP camera to prevent flooding; IGMP router port to assign query in ring for reversed multicast video flow IGMPv1,v2,v3 with Query mode for multimedia; GMRP* ■ Watchdog design to auto reboot switch CPU is found dead ■ Built-in environmental monitoring for system input voltage, current, ambient temperature ■ Supports DIDO (Digital Input/Digital Output) ■ IP54 aluminum housing with wall mount design ■ Bypass protection** - Bypass failed switch caused by power failure of switch to protect network from Disconnection (-B/-BB model) |
|---|---|

DIMENSIONS (unit=mm)

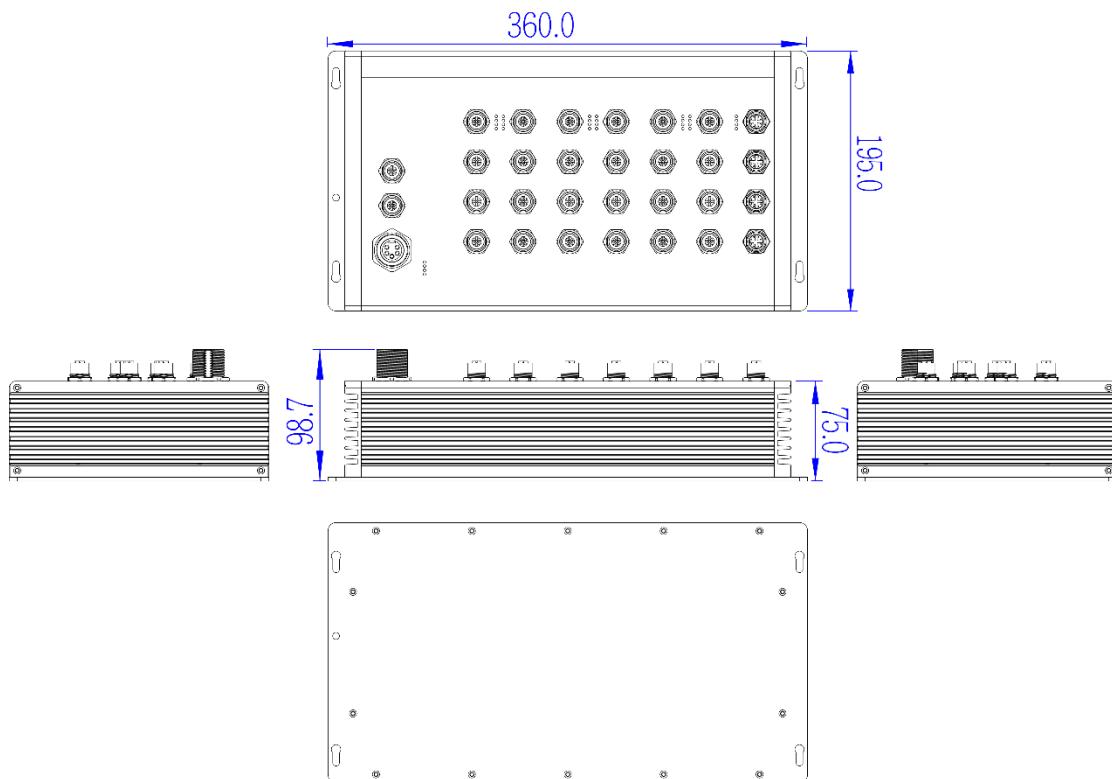

SPECIFICATION

Hardware Specification

Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag
Switch Architecture	Back-plane (Switching Fabric): 12.8Gbps
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100TX: 24 x ports M12 4-pole D-coded with Auto MDI/MDI-X function 10/100/1000T: 4 x ports M12 8-pole X-coded with Auto MDI/MDI-X function RS-232 connector: 1 x M12 5-pole A-coded Power Input connector: 1 x M23 5-pole A-coded Relay contact: 1 x M12 5-pole A-coded
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 6/ 6 cable EIA/TIA-568 100-ohm (100m)
Bypass	Built-in bypass module on uplink ports to pass to

Protection**	next switch in case of power failure
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red) Ethernet port: Link/Activity (Green), Speed (Green); R.M. indicator (Green)
DI/DO	1 Digital Input(DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 1 Digital Output(DO): Open collector to 40 VDC, 200mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-40°C~75°C / -40°F~167°F
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	16.8~137.5VDC w/ galvanic isolation
Power Consumption	Max. 16W
Dimensions	IP54 model: Aluminum case 360mm(W)x195mm(H)x98.7mm(D)
Weight	2.1kgs
Installation	IP54 model: Wall Mount Design
EMI & EMS	FCC Class A, CE EN55022 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-4-11
Stability Testing	EN61373 (Shock and Vibration)
MTBF	604,729 hrs (standards: IEC62830)
Verifications & report	EN50155/EN50121-3-2/EN50121-4 verification EN45545-2 R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke verification
Warranty	5 years
Software Specification	

Management	SNMP v1 v2c, v3/ Web/Telnet/CLI		SSL/ SSH for Management HTTPS for secure access to the web interface TACACS+ for Authentication
SNMP MIB	RFC 1215 Traps MIB*, RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 VLAN MIB*, Partial RFC 1757 RMON, RFC 2674 Q-Bridge MIB*; Bridge MIB, LLDP MIB RSTP MIB* Private MIB		IGMP Support IGMP snooping v1,v2,v3; Supports IGMP static route; 1024 multicast groups; IGMP router port ; IGMP query; GMRP
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support various ring/chain topologies Includes train ring, auto ring, basic single ring, enhanced ring, multiple-VLAN ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection		Static MAC-Port bridge Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
User friendly UI	■ Auto topology drawing ■ Topology demo ■ Auto configuration for G.8032(auto mode) for single ring Complete CLI for professional setting		Bandwidth Control Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Port Trunk with LACP	■ LACP Port Trunk: 8 Trunk groups		Flow Control Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN		System Log Supports System log record and remote system log server
CDP	Cisco Discovery Protocol for topology mapping		SMTP**/Text SMS** Supports SMTP** Server and 8 e-mail accounts for receiving event alert; can send SMS** text alert via mobile
Environmental Monitoring	System status for input voltage, current, PoE load and ambient temperature to be shown in GUI and sent alerting if any abnormal status		Relay Alarm Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096) GVRP, QinQ, QoS, Protocol based VLAN** ; IPv4/IPv6 Subnet based VLAN**		Protection ■ Miss-wiring avoidance ■ Repowered auto ring restore Loop protection
IPv6/4	Present		SNMP Trap Up to 10 trap stations; trap types including: <ul style="list-style-type: none">● Device cold start● Authorization failure● Port link up/link down● DI/DO open/close● Topology change (ITU ring)● Power failure
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree (16 MSTI)		DHCP ■ Environmental abnormal <ul style="list-style-type: none">● Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Option 66; IPv6 address resolution for DHCP server**
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP		Mac based DHCP Server Assign IP address by Mac that can include dumb switch in DHCP network
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues		DNS Provide DNS client feature and support Primary and Secondary DNS server
QoS by VLAN	Tagged QoS by VLAN for all devices in the network		SNTP Supports SNTP to synchronize system clock in Internet
IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.		Firmware Update Supports TFTP/SFTP** firmware update, TFTP backup and restore; HTTP firmware upgrade; Lantech™ InstaView** for multiple upgrade
Login Security	Supports IEEE802.1X Authentication/RADIUS		N-Key Configurator** RJ45 dongle for firmware upgrade, auto / editable configuration backup/restoration
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"		Configuration upload and download Supports editable configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; Optional InstaView for mass backup/editing configuration and upgrade
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Ingress/Egress ACL L2/L3		

*Future release

**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name. Optional Bypass relay models are available with -B/-BB model name.

- **TES-5424T-54-WV.....P/N: 8361-840**
24 10/100TX + 4 GigaT EN50155 M12 IP54 L2+ Managed Ethernet Switch; 16.8V~137.5V dual input;-40°C to 75°C
- **N-key Configurator.....P/N: 8850-100**
RJ45 connector dongle for firmware auto upgrade, auto configuration backup and editable restoration

OPTIONAL ACCESSORIES

M12/M23 Connector & Cable

- **ECONM23-5P(F)70CM CABLE** M23 power cable 90 degree angle, 70cm, 5 pin, Made in Taiwan
- **ECONM23-5P(F)70CM CABLE-C** M23 power cable 90 degree angle, 70cm, 5 pin, Made in China
- **ECONM23-5P(F)S-90** M23 5Pin female 90 degree screw type connector
- **ECONM23-5P(F)S-180** M23 5Pin female 180 degree screw type connector
- **ECABM12X83MSTP** 8Pin M12 X-coded 3 Meters, STP cable
- **ECAB124030MJS** 4 Pin M12 RJ45 Male 3 Meters; STP Cable

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2017 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.