

IWMR-3204DF

Industrial Multifunction VPN Router w/up to 2x WiFi 11ac + up to 2 LTE 4G + 2 serial ports + 4 GigaT + 2 Dual Speed SFP w/ Load Balancing, TWCC**, VPN, Protocol Gateway, Storage**; 24V/HV input**

- Up to 2 concurrent WiFi 11ac and redundancy(1L-2AC model)
- Up to 2 concurrent mobility for 3G/4G LTE Link&GPS (2L-1AC model/4 SIMs)
- Built-in 4 GigaT + 2 Dual Speed SFP Ethernet managed switch
- Built-in Managed Switch functions cover port management, QOS, VLAN, multicast, redundant ring and security function
- Dual radio for 802.11ac/a/b/g/n with concurrent 5GHz & 5GHz bands up to 2.6Gbps Wi-Fi bandwidth(2AC model)
- WiFi radio for 802.11ac/a/b/g/n with 5GHz or 2.4GHz;
- Support WiFi 802.11e traffic prioritization and WMM
- MIMO technology 3T3R up to 6 antenna(2AC); SMA type external antenna
- Fast roaming **, 802.11r standard
- Supports AP/ BRIDGE/Client modes
- Air-teaming** for WiFi high-sustainability and aggregated bandwidth
- Advanced wireless security WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)
- Optional TWCC** (Train Wireless Carriage Coupling)for auto wireless coupling
- VPN router for Multi-site VPN, OpenVPN, L2TP, IPSec, PPTP**, L2 over GRE
- Load Balancing** support 8 mechanism
- Support NAT and Firewall
- Support Modbus gateway on serial ports
- Support 2 RS422/485 ports with 2.5KV isolation or 2x RS232 ports
- Optional EMMC Flash storage on-board**
- Dual isolated Input voltage 9~60VDC (24V model); Single isolated input power 90~305VAC/120~430VDC (HV model)
- Ignition sensing on 24V model
- Vehicle E-marking* certificate
- Environmental monitoring for router inside info with voltage, current, temperature and WiFi & LTE graphic signal strength & TX/RX rate display
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware*; Dual image firmware*



OVERVIEW

Lantech IWMR-3204DF series is a next generation industrial multi-function VPN router w/up to 2x 802.3ac WiFi + up to 2x LTE modem + 4 GigaT + 2 Dual Speed SFP managed switch + 2 serial ports that supports advanced function of VPN, Load-balancing**(Basic & Full package), EMMC Flash Storage**, TWCC**, Protocol gateway(Modbus), WiFi roaming** and LTE quad SIM fail-over for industrial applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Optional TWCC (Train Wireless Carriage Coupling) for auto coupling**

IWMR-3204DF supports series supports optional TWCC** (Train Wireless Carriage Coupling) that enables auto wireless coupling to reconnect APs.

Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, IWMR-3204DF can allow auto-swap, failover & failback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by Load Balancing** with 8 schemes between multiple WANs.

With one mobile LTE module (1L model), 2 SIM card slots, IWMR-3204DF provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

IEEE 802.11ac dual band radio up to 2.6Gbps bandwidth

With IEEE 802.11ac capability, IWMR-3204DF can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6Gbps bandwidth (1.3Gbps per 1AC). It is also compatible with 802.11g/n that can work with 2.4GHz for longer range transmission.

The WiFi 11ac supports AP/BRIDGE/AP Client modes can be diverse for most of wireless application. Working with load-balancing** "Priority" mode, the AP client can enable router to transmit on WiFi with first priority.

Air-teaming for wireless high-sustainability and aggregated**

The innovative Air-teaming** can combines multiple wireless links to achieve both high-sustainability and aggregated bandwidth. High sustainability can keep the network traffic alive even one link is down or severely interfered. Aggregated bandwidth can bind two link channels to provide the maximum throughput.

MIMO technology with 3T3R and SMA type connectors

Lantech IWMR-3204DF series adapts MIMO technology with smart antenna transmission and reception for 3T3R. With six external detachable omni connectors and optional antennas, IWMR-3204DF can have better Wi-Fi & LTE/GPS coverage.

802.11r fast roaming **

IWMR-3204DF support fast roaming ** (optional) in coordination with Lantech Wireless Controller to allow encryption keys to be stored on all of the APs in a network. Client mode supports PMK** Caching and pre-authentication.

Wireless WMM QoS

IWMR-3204DF supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (WIFI multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP*, AES), 802.1x** ensures the best security and active defense against security trends. Lantech IWMR-3204DF support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 8 mechanisms for multi-WANs (premium license)**

IWMR-3204DF supports Load Balancing** for LTE/WAN connections. There are eight schemes for Load Balancing** function:

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate

		another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. WiFi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex. TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

2 port serial connection, Modbus gateway

It builds in 2 port serial connection for RS232, RS422, 485 in which RS422/485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, IWMR-3204DF support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, Open VPN, L2TP, IPsec L2 over GRE, and PPTP** for various VPN applications.

The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number.

DIDO for alarm & email notice; Event log; Remote Web/SMS** control**

2 sets of DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IWMR-3204DF will immediately send email** and trap.

When the router is at remote area with limited access, Web/SMS** control can help to get router status or remotely reboot by Web/SMS**.

24V/HV isolated input voltage selection: dual 9V-60VDC

(24V model) or single 90~305VAC/120~430VDC (HV model)

The IWMR-3204DF is able to work from 9VDC to 60VDC (24V model) Or with single high power supply at 90~305VAC / 120~430VDC (HV model).

Environmental monitoring for inside router info& alerting; Graphic WIFI & LTE signal strength and TX/RX rate display

The built-in environmental monitoring can detect router ambient temperature, voltage, current where can send the syslog, email** and SMS** alert when abnormal.

Ignition Sensing

Ignition sense allows you to delay power off the router with a designated time delay.

Built-in Managed Switch Function

Managed switch function is built-in and provides various L2+ functions for network access deployment. It delivers port management, VLAN, QoS, multicast, redundant ring and security functions.

USB port for back up, restore configuration and upgrade firmware*; Dual image firmware*

The built-in USB port can upload/download the configuration

through USB dongle for router replacement

It supports dual-image firmware* to choose which one to start.

Optional EMMC Flash storage**

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

Editable login page of captive portal

The IWMR-3204DF supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized industrial design and FCC*, CE* & E-marking* certificate

The IWMR-3204DF is designed to meet with industrial network environment. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards.

With CE & FCC radio certification for WIFI and LTE and E-marking certificate, the IWMR-3204DF is best for outdoor community, vehicle, process control automation etc application. For more usage flexibilities, IWMR-3204DF supports wide operating temperature from -20°C to 75°C & -40°C to 75°C (-E model)

FEATURES & BENEFITS

- **High Speed Air Connectivity:** WLAN interface support up to 2.6Gbps link speed(2AC) or 1.3Gbps (1AC)
- **Built-in 4 GigaT + 2 Dual Speed SFP managed Ethernet switch**
- **Optional TWCC** (Train Wireless Carriage Coupling) for auto wireless coupling**
- **EMMC-FLASH storage** 8/16/32G**
- **Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n**
- **Support 2.4Ghz operating within the following frequency bands:**
 - **2.412~2.472 GHz**
- **Support 5Ghz operating within the following frequency bands:**
 - **5.180GHz~5.825GHz**
- **MIMO smart antenna technology with 3T3R**
- **6 SMA type connectors for WiFi & LTE, GPS**
- **Optional Air-teaming** protection(2AC)**
 - **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
 - **Aggregated bandwidth :** The bandwidth of two link members can be aggregated to provide maximum throughput
- **Output power : <24dBm**
- **Transmit power adjustment**
- **VAP (virtual access point) support up to 16 SSIDs**
- **Operation modes : AP/ BRIDGE / Client**
- **IEEE 802.11h DFS and automatic TPC**
- **Traffic control for each SSID****
- **Band preference for same SSID services on dual band****
- **Rate selection to disable low data rate access****
- **Highly Security Capability:** WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)
- **HTTP/HTTPS/Telnet/SSH & Administration access**
- **Support IPv6** & IPv4 protocol**
- **Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported****
- **Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.**
- **Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.**
- **Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization**
- **Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP, IPsec L2 over GRE, and PPTP** fro secured network connection**
- **The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number.**
- **Support SNMP*v1/v2c/v3**
- **NAT/DMZ**
- **Dual concurrent LTE 4G/3G design (2L model)for auto-swap/failover/failback between multiple ISPs for continuous service (four SIM card slots)**
- **One LTE 4G/3G w/ 2 SIM card design(1L model) for mobile redundancy**
- **GPS/ GLONASS (support by LTE module) connection**
- **Fast roaming** (Optional) between APs by Wireless Controller**
- **Load Balancing** supports 8 mechanism between multiple WANs**


Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. WiFi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex. TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the

		WAN link with lowest latency time.
--	--	------------------------------------


- Built-in 2 x serial ports(RS232/RS422/485)
- Serial port with 2.5KV isolation on RS422/485
- Supports 2DI / 2DO (Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP for serial ports
- Event alerting by Syslog, SNMP Trap, Email**, SMS** text, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web/SMS** control to get status or re-boot by Web or SMS**
- Graphic LTE & WIFI signal strength & TX/RX rate display
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal
- Dual image firmware* to choose which to start
- Firmware upgradeable through TFTP/FTP/HTTP
- Configuration backup and restoration
 - Supports text configuration file for system quick installation
 - USB port to upload/download configuration by USB dongle
- Reset button for factory default mode
- Support editable captive portal login page
- DIN-Rail and Wall-mount** installation
- Operation temperature -20~75C or -40~75C (-E model)

DIMENSIONS (unit=mm)

24V model

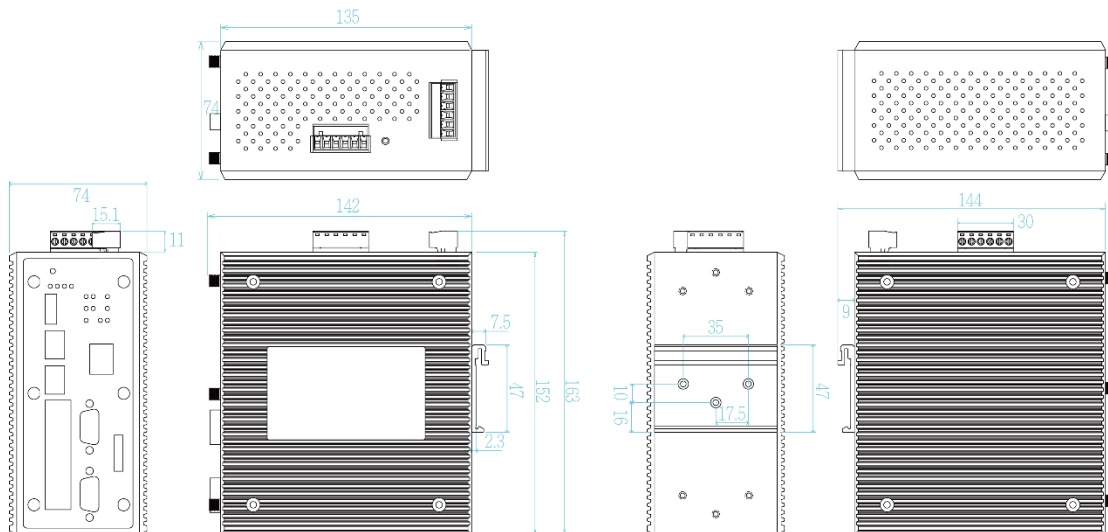

HV model

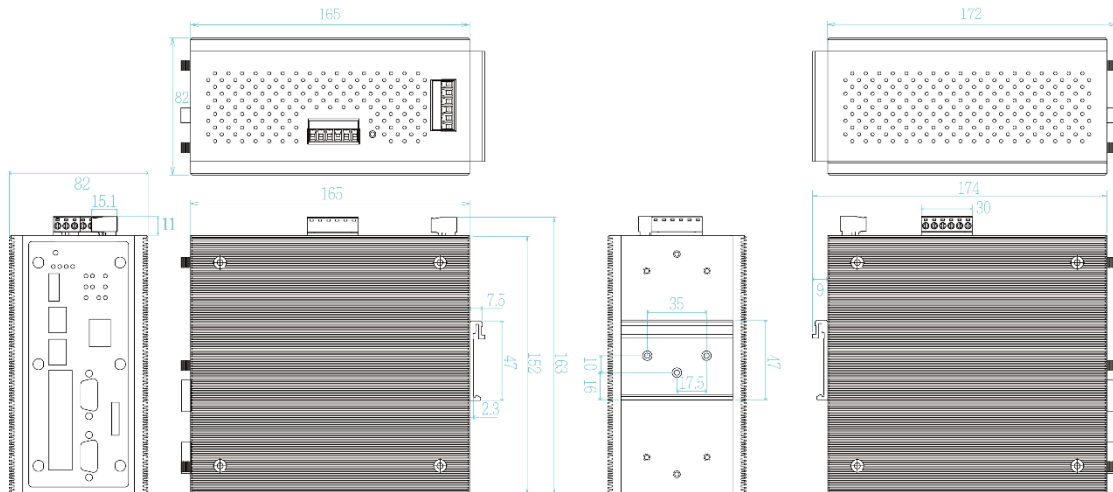

SPECIFICATION

WLAN Interface	
Operating Mode	AP/BRIDGE/Client modes
Radio Frequency Type	DSSS, OFDM
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps
Modulation	802.11b: DSSS 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
Operating Frequency	IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz
Transmission Rate	IEEE802.11ac: up to 1300Mbps IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE802.11n: up to 450Mbps
IEEE 802.11b/g/n(2.4Gbps)	Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0~MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)
IEEE 802.11a/n/ac(5Gbps)	Output Power Tx +/- 2dB(per chain) 20dBm @ 6~24Mbps 16dBm @ 36~54Mbps 19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80) 13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps
Encryption Security	WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP **
Wireless Security	SSID broadcast disable**
Cellular Interface	
Location Solutions	GPS, Glonass (EUNA/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)
Band Options	APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/1900/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B41) EU & USA model LTE: 2100/1800/2600/900/800 MHz (B1/B2/B3/B4/B5/B7/B12/B13/B20/B25/B26/B29/B30/B41) WorldWide (WW model) LTE: 2100/1900/1800/1700/850/2600/900/1800/700/700/850/850/800/850/700/2300/1500/2500/3500/3700/5200/3600/1700 (B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B18/B19/B20/B26/B28/B29/B30/B32/B41/B42/B43/B46/B48/B66)
Data Rates – LTE	APAC & Australia (APAC model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps Americas (US model)/ EMEA (EU model) Downlink (Category 3): 100 Mbps (20 MHz bandwidth) 50 Mbps (10 MHz bandwidth)

	Uplink (Category 3): 50 Mbps (20 MHz bandwidth) 25 Mbps (10 MHz bandwidth)		Port link up / link down DI/DO high / low
Software		Remote Web/SMS** control	To reboot router by WebUI or SMS**
IPv6/4	Present	Captive portal	Editable captive portal login page
Fast Roaming **	802.11r (optional)	Maintenance	Firmware upgradeable through TFTP/FTP/HTTP
TWCC**	Optional Train Wireless Carriage Coupling for Auto wireless Coupling	Configuration backup & restore	Supports text configuration file for system quick installation USB port to upload/download configuration by USB dongle
Air-teaming**(2AC)	<ul style="list-style-type: none"> High sustainability with fail over link Aggregated bandwidth 	Physical Ports & System	
WMM	WiFi multimedia and 802.11e traffic prioritization	Connectors	10/100/1000T: 4x ports RJ 45 + 2 Dual Speed SFP USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 DB9 SIM card slots : 4(2L) or 2(1L) SMA connector : 6 Power & P-Fail connector: 1 x 6-pole terminal block DIDO : 1 x 5-pole terminal block
VPN	Multi-site VPN, Open VPN, PPTP**, L2TP, IPSec , L2 over GRE	Serial Baud Rate	1000Kbps for RS232 ; 12Mbps for RS422/485
Firewall	DoS**, IP address filter / Mac address filter* / TCP/UDP port number	Serial Data Bits	5, 6, 7, 8
Load Balancing**	8 schemes for multiple WAN(client mode)	Serial Parity	odd, even, none, mark, space
Fixed(standard)	Manually route by traffic type through fixed WAN link	Serial Stop Bits	1, 1.5, 2
Basic Package**		RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.	RS-422	Tx+,Tx-, Rx+, Rx-,GND
Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.	RS-485 (2-wire)	Data+, Data-,GND
Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights	Isolation protection	RS422/485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO 3KV isolation Input power 1.5KVA isolation
Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.	EMMC Storage**	8/16/32 GB
Full Package incl. Basic package**		DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.	LED Indicators	
Smallest load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic	Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Ring Master(Green), Storage(Green), Serial1/Serial2(Green) ,Ready(Green)
Fastest*	Routes connections through the WAN link with lowest latency time.	10/100/1000Base-T(X) port indicator	Link/Activity (Green), Speed (Yellow)
Security	WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)/SSH/SSL/HTTPS	SIM	Green for Link/Act
Authentication	Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS ,PEAP; SSID broadcast disable supported**	GPS	Green for Link/Act
SSID	16 sets	Fault	Red: Ethernet link down or power down
Login Security	Supports IEEE802.1x** Authentication/RADIUS	Fault contact	
Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)	Relay	Relay output to carry capacity of 1A at 24VDC
Protocol	PPPoE Client,DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DoS**); IP address filter / Mac address filter* / TCP/UDP port name),VRRP**, DDNS*	Power	
Protocol Gateway	Modbus on serial ports	Input power	Dual DC isolated input, 9~60VDC (24V model) Single HV isolated input, 90~305VAC/120~430VDC (HV model)
Management	SNMP*v1,v2c,v3/ Web/Telnet/CLI	Power consumption (Typ.)	30.5 Watts
Client mode	PMK** Caching and pre-authentication.	Physical Characteristic	
Environmental Monitoring	System status for input voltage, current , ambient temperature to be shown in GUI and sent alerting if any abnormal status	Enclosure	IP 30 aluminum case
Graphic signal display	Graphic WiFi & LTE signal strength & TX/RX rate display	Dimension	74 (W) x 142 (D) x 152 (H) mm (24V model) 82 (W) x 172 (D) x 152 (H) mm (HV model)
Timer	Built-in Real Time Clock to keep track of time always(RTC)	Weight	1000g
Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)	Environmental	
SNMP trap	Device cold / warm start	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
		Operating Temperature	-20°C ~ 75°C (-4°F ~ 167°F) -40°C ~ 75°C (-40°F ~ 167°F) for -E model
		Operating Humidity	5% to 95% Non-condensing
		Regulatory approvals	
		EMC	FCC* Part 15 Class A, EN55032*
		EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
		E-marking**	E13**
		MTBF	564950hrs(IEC-62380)
		Warranty	5 years

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
	2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm
MCS 1		21dBm	26dBm	±2dB	-92dBm	±2dB
MCS 2		21dBm	26dBm	±2dB	-89dBm	±2dB
MCS 3		20dBm	25dBm	±2dB	-84dBm	±2dB
MCS 4		20dBm	25dBm	±2dB	-83dBm	±2dB
MCS 5		20dBm	25dBm	±2dB	-80dBm	±2dB
MCS 6		18dBm	23dBm	±2dB	-79dBm	±2dB
MCS 7		16dBm	21dBm	±2dB	-77dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-71dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
5GHz 802.11ac VHT80	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB	

ORDERING INFORMATION

For -40~75C operational temperature model, the model name will add -E

- **IWMR-3204DF-2L-1AC-2S-24V-EUNA.....P/N: 8686-001**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2S-24V-WW.....P/N: 8686-002**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; worldwide band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2S-24V-APAC..... P/N: 8686-003**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2SA-24V-EUNA.....P/N: 8686-004**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; EU and US band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2SA-24V-APAC.....P/N: 8686-005**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2SA-24V-WW.....P/N: 8686-006**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual isolated input 9~60VDC; -20~75C

- **IWMR-3204DF-1L-1AC-2S-24V-EUNA.....P/N: 8686-007**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2S-24V-APAC.....P/N: 8686-008**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2S-24V-WW.....P/N: 8686-009**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2SA-24V-EUNA.....P/N: 8686-010**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2SA-24V-APAC.....P/N: 8686-011**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2SA-24V-WW.....P/N: 8686-012**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2S-24V-EUNA.....P/N: 8686-013**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2S-24V-APAC.....P/N: 8686-014**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2S-24V-WW.....P/N: 8686-015**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2SA-24V-EUNA.....P/N: 8686-016**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2SA-24V-APAC.....P/N: 8686-017**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; APAC band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2SA-24V-WW.....P/N: 8686-018**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; dual isolated input 9~60VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2S-HV-EUNA.....P/N: 8686-019**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2S-HV-WW.....P/N: 8686-020**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; worldwide band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2S-HV-APAC..... P/N: 8686-021**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2SA-HV-EUNA.....P/N: 8686-022**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; EU and US band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2SA-HV-APAC.....P/N: 8686-023**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** AP VPN Mobile Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-2L-1AC-2SA-HV-WW.....P/N: 8686-024**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2S-HV-EUNA.....P/N: 8686-025**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2S-HV-APAC.....P/N: 8686-026**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2S-HV-WW.....P/N: 8686-027**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2SA-HV-EUNA.....P/N: 8686-028**

Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -20~75C

- **IWMR-3204DF-1L-1AC-2SA-HV-APAC.....P/N: 8686-029**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-1AC-2SA-HV-WW.....P/N: 8686-030**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2S-HV-EUNA.....P/N: 8686-031**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2S-HV-APAC.....P/N: 8686-032**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2S-HV-WW.....P/N: 8686-033**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2SA-HV-EUNA.....P/N: 8686-034**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2SA-HV-APAC.....P/N: 8686-035**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; APAC band; single high power 90~305VAC / 120~430VDC; -20~75C
- **IWMR-3204DF-1L-2AC-2SA-HV-WW.....P/N: 8686-036**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~75C

EMMC Flash Storage

- **8G.....P/N: 8850-113**
- **16G.....P/N: 8850-114**
- **32G.....P/N: 8850-115**

Software License

- **LOAD BALANCING Basic Package.....P/N: 9000-101**
- **LOAD BALANCING Full Package.....P/N: 9000-102**
- **TWCC.....P/N: 9000-103**
- **WIRELESS ROAMING.....P/N: 9000-107**

OPTIONAL ACCESSORIES

DIN Rail Power

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Mini GBIC (SFP)

- | | |
|--|--|
| ■ 8330-162X MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ 8330-167 MINI GBIC 1000ZX (LC/80km) Transceiver |
| ■ 8330-163X MINI GBIC 1000SX2 (LC/2km) Transceiver | ■ 8330-170 MINI GBIC 1000EZ (120km) Transceiver |
| ■ 8330-165X MINI GBIC 1000LX (LC/10km) Transceiver | ■ 8330-168 MINI GBIC 1000T (100m) Transceiver |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/40km) Transceiver | ■ 8330-188 LTSFP-1000BX-10KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000XD (LC/50km) Transceiver | ■ 8330-189 LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/60km) Transceiver | ■ 8330-186 LTSFP-1000BX-20KM Transceiver (WDM 1310) |

■ 8330-187	LTSFP-1000BX-20KM Transceiver (WDM 1550)	■ 8330-184	LTSFP-1000BX-80KM Transceiver (WDM 1490)
■ 8330-180	LTSFP-1000BX-40KM Transceiver (WDM 1310)	■ 8330-185	LTSFP-1000BX-80KM Transceiver (WDM 1550)
■ 8330-182	LTSFP-1000BX-40KM Transceiver (WDM 1550)	■ 8330-262	MINI GBIC 2.5G 850nm VCSEL (LC/0.3km) Transceiver
■ 8330-181	LTSFP-1000BX-60KM Transceiver (WDM 1310)	■ 8330-263	MINI GBIC 2.5G 1310nm FP (LC/2km) Transceiver
■ 8330-183	LTSFP-1000BX-60KM Transceiver (WDM 1550)	■ 8330-265	MINI GBIC 2.5G 1310nm DFB (LC/15km) Transceiver

All SFP ended with D are with Diagnostic function

LTE Antenna

- **ANT11000041** 791-960/1710~2170/2500~2700MHZ, SMA plug, EUNA
- **ANT11000042** 704-960/1710~2170MHZ, SMA plug, US

Wireless Connector Adapter

- **ADA11000052** RP SMA Jack Base, Length : 1M

Wireless Antenna

- **ANT11000051** 2.4G&5.8GHz SMA Omni-directional / dipole antenna, 2dBi or 5.8GHz 3dBi

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.