

TWAP-5002

EN50155 Multifunction VPN Router w/up to 2 WiFi 11ac + 2 serial ports**+ 2 Gigabit X-coded Ethernet(incl.1 PD) for Load Balancing**, TWCC**, VPN, Storage**; WV input; IP65/54

- Built-in up to 2x Wi-Fi 11ac/a/b/g/n module + 2xGigabit X-coded ports(incl. 1PD)
- Optional TWCC**(Train Wireless Carriage Coupling) for auto wireless coupling
- Optional Air-teaming** for Wi-Fi high-sustainability and aggregated bandwidth
- Optional 2 serial ports with 2.5K isolation(RS422/485) or w/o isolation(RS232)**
- Wi-Fi radio for 802.11ac/a/b/g/n with 5GHz or 2.4GHz; MIMO 3T3R
- Fast roaming**; 802.11r work with Lantech controller
- Supports AP/ Bridge/ Client modes
- VPN router for Multi-site VPN, OpenVPN, L2TP, IPsec, PPTP**, L2 over GRE
- Load Balancing** support 8 mechanism for Wi-Fi client/WAN arrangement
- Support NAT and Firewall
- Optional EMMC Flash storage on-board**
- Optional support Modbus gateway on serial ports
- Galvanic isolation on WV model from 16.8V~137.5V input
- Built-in environmental monitoring for router inside info with voltage, current, temperature; Wi-Fi graphic signal strength & TX/RX rate display
- Editable login page of captive portal for hot-spot application
- USB port for backup, restore the configuration file and upgrade firmware*; Dual image firmware*
- IP 65 /54 Aluminum housing for best heat dissipation and preventing moist ingress
- EN50155/61373/45545 verification for railway application



OVERVIEW

Lantech TWAP-5002 series is a next generation EN50155 multi-function VPN router w/2x 802.11ac Wi-Fi + 2x Gigabit Ethernet(incl.1 PD)+ 2 serial ports** that support advanced VPN function, Load-balancing**(Premium pack), EMMC Flash Storage**, Protocol gateway**, Storage**, Wi-Fi roaming**, Air teaming** for on-board / onboard-to-ground applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Optional TWCC (Train Wireless Carriage Coupling) for auto coupling**

TWAP-5002 series supports optional TWCC** (Train Wireless Carriage Coupling) that enables auto wireless coupling to reconnect APs.

IEEE 802.11ac radio up to 2.6Gbps bandwidth

With IEEE 802.11ac capability, TWAP-5002 can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6Gbps bandwidth (1.3Gbps per 802.11ac module). It is also compatible with 802.11b/g/n that can work with 2.4GHz for longer range transmission.

The Wi-Fi 11ac supports AP/BRIDGE/AP Client modes can be diverse for most of wireless application. Client mode supports PMK** Caching and pre-authentication. Working with load-balancing** "Priority" mode, the AP client can enable router to transmit on Wi-Fi with first priority.

Optional EMMC Flash storage**

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

MIMO technology with 3T3R and SMA/QMA type connectors**

Lantech TWAP-5002 series adapts MIMO technology with Smart antenna transmission and reception for 3T3R. With six external detachable antenna connectors (SMA/QMA**) and optional antennas, TWAP-5002 can have better Wi-Fi coverage.

Optional 802.11r fast roaming**

TWAP-5002 support fast roaming** (optional) in coordination with Lantech Wireless Controller to allow encryption keys to be stored on all of the APs in a network.

Client mode supports PMK** Caching and pre-authentication.

Air-teaming for wireless high-sustainability and aggregated bandwidth**

The innovative Air-teaming** can combines multiple wireless links to achieve both high-sustainability and aggregated bandwidth. High sustainability can keep the network traffic alive even one link is down or severely interfered. Aggregated bandwidth can bind two link channels to provide the maximum throughput.

Wireless WMM QoS

TWAP-5002 supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (Wi-Fi multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP*, AES), 802.1x** ensures the best security and active defense against security treads. Lantech TWAP-5002 support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 8 mechanism for multi-WANs (premium license)**

TWAP-5002 supports Load Balancing** for WAN connections. There are eight schemes for Load Balancing** function:

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the

		WAN link with lowest latency time.
--	--	------------------------------------

Optional 2 port serial connection, Modbus gateway

Optional 2 port serial connection for RS232 or RS422, 485 in which RS422/485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, TWAP-5002 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, Open VPN, L2TP, IPsec L2 over GRE, NAT, and PPTP** for various VPN applications.

The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number.

DIDO for alarm & email notice; Event log; Remote Web control**

2 sets of DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the TWAP-5002 will immediately send email** and trap.

When the router is at remote area with limited access, Web control can help to get router status or remotely reboot by Web.

Wide range dual isolated input voltage from 16.8-137.5V (WV model)

The TWAP-5002 is able to work from dual16.8V ~137.5V DC isolated input (WV model) that is particular good for vehicle, rail train, depot etc. applications.

Environmental monitoring for inside router info& alerting; Wi-Fi signal strength and TX/RX rate display

The built-in environmental monitoring can detect router overall temperature, voltage, current where can send the syslog, email** alert when abnormal. The graphic Wi-Fi signal strength and TX/RX rate display shows connection status at a glance.

USB port for back up, restore configuration and upgrade firmware; Dual image firmware*

The built-in USB port can upload/download the configuration and upgrade firmware* through USB dongle for router replacement.

It supports dual-image firmware* to choose which one to start.

Editable login page of captive portal

The TWAP-5002 supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized EN50155 design and FCC/CE, E-marking certificate**

The TWAP-5002 series is verified with EN50155, 61373, 45545 standard with IP65/54 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards. With CE & FCC radio certification for Wi-Fi and E-marking** certificate, the TWAP-5002 is best for outdoor

community, vehicle, power substation, process control automation etc. For more usage flexibilities, TWAP-5002

supports operating temperature from -20°C to 70°C or -40°C to 70°C (-E) .

FEATURES & BENEFITS

- **High Speed Air Connectivity: WLAN interface support up to 2.6Gbps link speed(2AC)**
- **Built-in two Gigabit ports X-coded incl. 1 PD; 1LAN+1WAN or 2LAN**
- **Optional TWCC** (Train Wireless Carriage Coupling) for auto wireless coupling**
- **Optional Air-teaming** protection(2AC)**
 - **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
 - **Aggregated bandwidth :** The bandwidth of two link members can be aggregated to provide maximum throughput
- **Fast roaming** (Optional) between APs by Wireless Controller**
- **Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n**
- **Support 2.4Ghz operating within the following frequency bands:**
 - **2.412~2.472 GHz**
- **Support 5Ghz operating within the following frequency bands:**
 - **5.180GHz~5.825GHz**
- **MIMO Smart antenna technology with 3T3R with 6 SMA/QMA** type connectors for Wi-Fi**
- **EMMC-FLASH storage**8/16/32G**
- **Output power < 24dBm**
- **Transmit power adjustment**
- **VAP (virtual access point) support up to 16 SSIDs**
- **Operation modes : AP/ Bridge/ AP Client**
- **Traffic control for each SSID****
- **Band preference for same SSID services on dual band****
- **Rate selection to disable low data rate access****
- **Highly Security Capability: WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES) WPA2/ WPA2-PSK (TKIP*,AES)**
- **HTTP/HTTPS/Telnet/SSH & Administration access**
- **Support IPv6** & IPv4 protocol**
- **Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported****
- **Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.**
- **Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.**
- **Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization**
- **Load Balancing** supports 8 mechanism between multiple WANs**

Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.


- **Optional 2 x serial ports(RS232/RS422/485)**
- **Optional Serial port with 2.5KV isolation on RS422/485**
- **Supports 2DI / 2DO(Digital Input / Output)**
- **Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP, IPsec L2 over GRE, and PPTP** fro secured network connection**
- **The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number**
- **NAT/DMZ**
- **Optional Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP**
- **Event alerting by Syslog, SNMP Trap, Email**, Relay ; Permanent local log rotation / Maxi 1K records**
- **Remote Web control to get status or re-boot by Web**
- **Built-in RTC to keep track of time always**
- **Support SNTP to synchronize system clock**
- **Support LLDP discovery protocol**
- **Support DHCP Server and Client**
- **Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal**
- **Graphic Wi-Fi signal strength & TX/RX rate display**

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.


- Firmware upgradeable through TFTP/FTP/HTTP
- Configuration backup and restoration
 - Supports editable configuration file for system quick installation
 - USB port to upload/download firmware by USB dongle
- Dual image firmware*
- Support editable captive portal login page
- IP 65/54 housing for water proof environment
- Wall-mount installation
- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration verification
- Operation temperature -20~70C or -40~70C (-E)

DIMENSIONS (unit=mm)

With serial ports

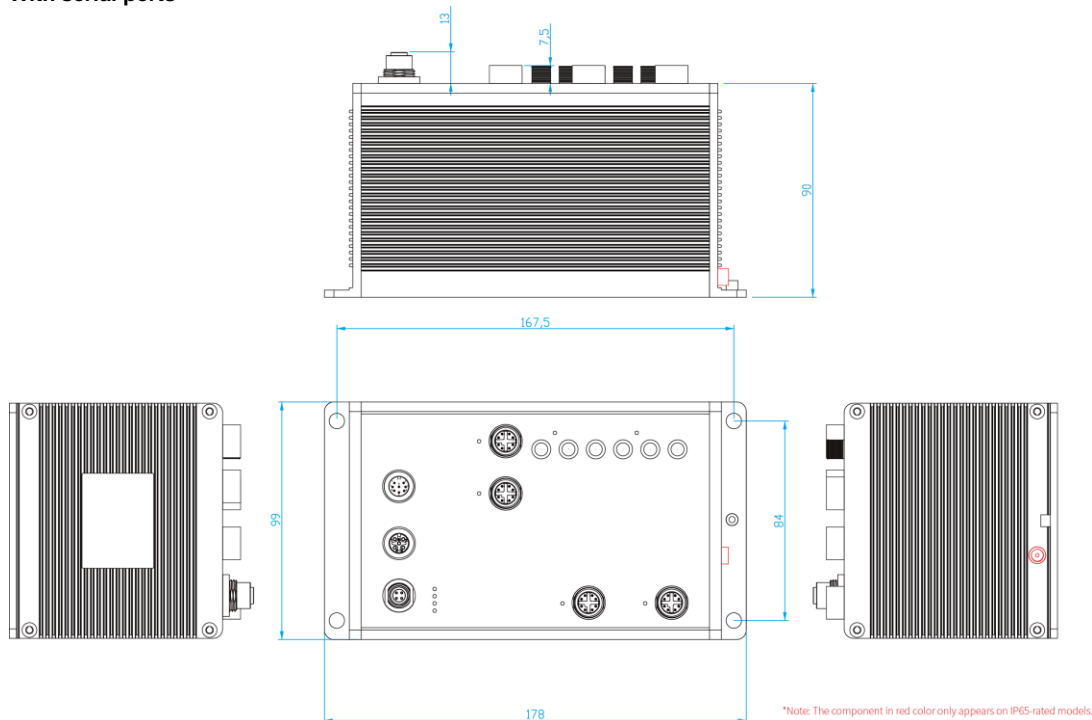

Without serial ports

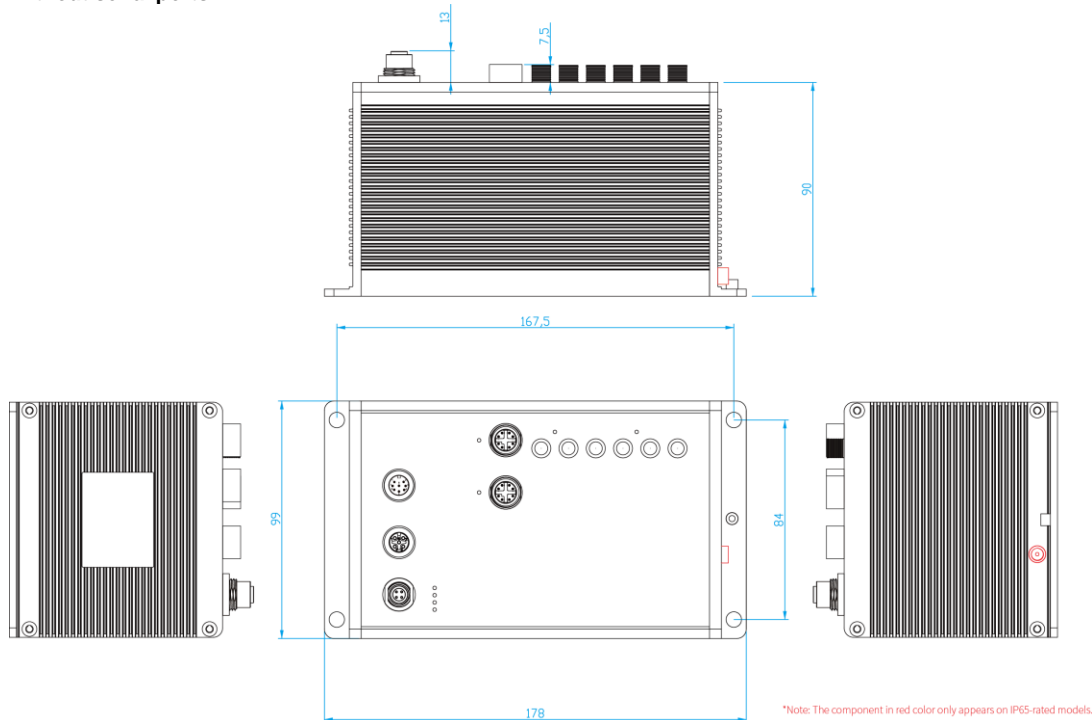

SPECIFICATION

WLAN Interface		Wireless Security	SSID broadcast disable**
Operating Mode	AP/BRIDGE/Client modes	Software	
Radio Frequency	DSSS, OFDM	IPv6/4	Present
Type		Login Security	Supports IEEE802.1x** Authentication/RADIUS
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz	TWCC**	Optional Train Wireless Carriage Coupling for Auto wireless Coupling
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps	Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)
Modulation	802.11b: DSSS 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	Protocol	PPPoE Client,DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ, NAT, SNTP, Firewall(Firewall(DoS**); IP address filter / Mac address filter* / TCP/UDP port number), VRRP**, DDNS*
Operating Frequency	IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz	Management Load Balancing**	SNMP*v1,v2c,v3/ Web/Telnet/CLI 8 schemes for multiple WAN
Transmission Rate	IEEE802.11ac: up to 1300Mbps IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE802.11n: up to 450Mbps	Fixed	Manually route by traffic type through fixed WAN link.
IEEE 802.11b/g/n(2.4Gbps)	Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0~MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)	Basic Package**	
IEEE 802.11b/g/n(2.4Gbps)	Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0~MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.
IEEE 802.11a/n/ac(5Gbps)	Output Power Tx +/- 2dB(per chain) 20dBm @ 6~24Mbps 16dBm @ 36~54Mbps 19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80) 13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
Encryption Security	WEP : (64-bit , 128-bit key supported) WPA /WPA2 : IEEE802.11(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP **	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights
		Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
		Full Package incl. basic package**	
		Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
		Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
		Fastest*	Routes connections through the WAN link with lowest latency time.
		Fast Roaming**	802.11r work with Lantech controller
		WMM	Wi-Fi multimedia and 802.11e traffic prioritization
		Security	WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)/SSH/SSL/HTTPS
		Authentication	Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported**
		SSID	16 sets
		Client mode	PMK** Caching and pre-authentication.
		Timer	Built-in Real Time Clock to keep track of time always(RTC)
		Discovery	IEEE 802.11ab Link Layer Discovery Protocol (LLDP)
		SNMP trap	Device cold / warm start Port link up / link down DI / DO high / low
		Environmental Monitoring	System status for input voltage, current , ambient temperature to be shown in GUI and sent alerting if any abnormal status
		Graphic signal display	Graphic Wi-Fi signal strength & TX / RX rate display
		Remote Web control	To reboot or get status of router by Web
		Captive portal	Editable captive portal login page
		Maintenance	Firmware upgradeable through TFTP/FTP/HTTP
		Configuration backup & restore	Supports text configuration file for quick system installation USB port to upload/download firmware by USB dongle
		Physical Ports & System	
		Connectors	10/100/1000T: 2x ports M12 8-pole X-coded with Auto MDI/MDI-X function (one port PD; 1LAN+1WAN or 2LAN)

USB/Console connector: 1 x M12 8-pole A-coded DIDO : 1 x 5-pole terminal block Power Input connector : 1 x M12 4-pole A-coded Optional Serial connector : 2 DB9 SMA/QMA** connector for Wi-Fi: 3 (male)	model)	
Serial Baud Rate**	Power consumption (Typ.)	
Serial Data Bits**	18 Watts	
Serial Parity**	Physical Characteristic	
Serial Stop Bits**	Enclosure	IP 65/54 aluminum case
RS-232**	Dimension	178 (W) x 99 (D) x 103 (H) mm
RS-422**	Weight	1000g
RS-485 (2-wire)**	Environmental	
Isolation protection**	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
DI/DO	Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
EMMC Storage**	Operating Humidity	-40°C ~ 70°C (-40°F ~ 158°F) –E Model 5% to 95% Non-condensing
LED Indicators		
Power & system indicator	Regulatory approvals	
10/100/1000Base-T(X) port indicator	EMC	FCC Part 15 Class A, EN55032 , EN55024
WLAN LEDs	EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-6-2
Fault	Radio Frequency	EN301 489-1, EN301 489-17, EN301 489-19, EN301 489-52, EN300 440, EN301 893, EN300 328, EN301 908-1, EN303 413, EN62311
Fault contact		
Relay	Safety	EN60950 (LVD), AS60950 (LVD)
Power	Stability Testing	EN61373 (Shock & Vibration)
Input power	Verifications & report	EN50155, EN50121-3-2, EN50121-4 verification EN45545-2 R13/R22/R23/R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke verification
	MTBF	565,049 Hrs (IEC62830 standards)
	Warranty	5 years

*Future Release
**Optional

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-92dBm	±2dB
	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-77dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 8	13dBm	18dBm	±2dB	-71dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
5GHz 802.11ac VHT80	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB	
MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB	
MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB	

ORDERING INFORMATION

All QMA connector models are with -Q model name; -40-70C operational models are with -E model name.

- **TWAP-5002-1AC-WV-54.....P/N: 8630-021**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac + 12 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN; dual isolated 16.8V~137.5VDC; -20~70C; IP54 housing
- **TWAP-5002-1AC-2S-WV-54.....P/N: 8630-023**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac + 2 serial ports + 2 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP54 housing; -20~70C
- **TWAP-5002-1AC-2SA-WV-54.....P/N: 8630-025**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac + 2 serial ports + 2 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP54 housing; -20~70C
- **TWAP-5002-2AC-WV-54.....P/N: 8630-022**
EN50155 Multifunction VPN Router w/2x Wi-Fi 11ac + 12 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN; dual isolated 16.8V~137.5VDC; -20~70C; IP54 housing
- **TWAP-5002-2AC-2S-WV-54.....P/N:8630-024**
EN50155 Multifunction VPN Router w/2x Wi-Fi 11ac +2 isolated serial RS422/485 ports + 2 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP54 housing; -20~70C
- **TWAP-5002-2AC-2SA-WV-54.....P/N:8630-026**

EN50155 Multifunction VPN Router w/2x Wi-Fi 11ac +2 isolated serial RS422/485 ports + 2 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP54 housing; -20~70C

- **TWAP-5002-1AC-WV-65.....P/N: 8630-041**
EN50155 Multifunction VPN Router w/1 Wi-Fi 11ac + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN; dual isolated 16.8V~137.5VDC; -20~70C; IP65 housing
- **TWAP-5002-2AC-WV-65.....P/N: 8630-042**
EN50155 Multifunction VPN Router w/2x Wi-Fi 11ac + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN; dual isolated 16.8V~137.5VDC; -20~70C; IP65 housing
- **TWAP-5002-1AC-2S-WV-65.....P/N: 8642-043**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac +2 isolated serial RS422/485 ports + 4 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP65; -20~70C
- **TWAP-5002-1AC-2SA-WV-65.....P/N: 8642-045**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac +2 isolated serial RS422/485 ports + 4 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP65; -20~70C
- **TWAP-5002-2AC-2S-WV-65.....P/N: 8642-044**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac +2 isolated serial RS422/485 ports + 4 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP65; -20~70C
- **TWAP-5002-2AC-2SA-WV-65.....P/N: 8642-046**
EN50155 Multifunction VPN Router w/1x Wi-Fi 11ac +2 isolated serial RS422/485 ports + 4 Gigabit X-coded Ethernet Switch + 2WAN/2LAN with Load Balancing**, TWCC**, VPN, Protocol Gateway**; dual isolated 16.8V~137.5VDC; IP65; -20~70C

EMMC Flash Storage

- **8G.....P/N: 8850-113**
- **16G.....P/N: 8850-114**
- **32G.....P/N: 8850-115**

Software License

- **LOAD BALANCING Basic Package.....P/N: 9000-101**
- **LOAD BALANCING Full Package.....P/N: 9000-102**
- **TWCC.....P/N: 9000-103**
- **WIRELESS ROAMINGP/N: 9000-107**

OPTIONAL ACCESSORIES

Wireless Connector Adapter

- **ADA11000052** RP SMA Jack Base, Length : 1M

Wireless Antenna

- **ANT11000051** 2.4G&5.8GHz SMA Omni-directional / dipole antenna, 2dBi or 5.8GHz 3dBi

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at any time, without notice.