

IWMR-3004

Industrial Multifunction VPN Router w/up to 2x WiFi 11ac + up to 2 LTE 4G + 2 serial ports + 4 Gigabit Ethernet Switch+ 2WAN ports w/Load Balancing, TWCC**, VPN, Protocol Gateway, Storage**;
24V/HV input**

- Up to 2 concurrent WIFI 11ac and redundancy(1L-2AC model)
- Up to 2 concurrent mobility for 3G/4G LTE Link & GPS(2L-1AC model/4 SIMs)
- Built-in 4 Gigabit Ethernet managed switch + 2WAN ports
- Managed Switch functions cover port management, QOS, VLAN, multicast, redundant ring and security function
- Dual radio for 802.11ac/a/b/g/n with concurrent 5GHz & 5GHz bands up to 2.6Gbps Wi-Fi bandwidth(2AC model)
- WIFI radio for 802.11ac/a/b/g/n with 5GHz or 2.4GHz;
- Support WIFI 802.11e traffic prioritization and WMM
- MIMO technology 3T3R up to 6 antenna(2AC); SMA type external antenna
- Fast roaming **, 802.11r standard
- Supports AP/ BRIDGE/Client modes
- Air-teaming** for WIFI high-sustainability and aggregated bandwidth
- Advanced wireless security WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)
- Optional TWCC** (Train Wireless Carriage Coupling)for auto wireless coupling
- VPN router for Multi-site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE , IPGRE
- Load Balancing** support 8 mechanism
- Optional EMMC Flash storage on-board**
- Support NAT and Firewall
- Support Modbus gateway on serial ports
- Support 2 RS422/485 ports with 2.5KV isolation or 2x RS232 ports
- Dual isolated Input voltage 9~60VDC (24V model); Single isolated input power 90~305VAC/120~430VDC (HV model)
- Ignition sensing on 24V model
- Vehicle E-marking* certificate
- Environmental monitoring for router inside info with voltage, current, temperature; WIFI & LTE graphic signal strength
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware*



OVERVIEW

Lantech IWMR-3004 series is a next generation industrial multi-function VPN router w/up to 2x 802.3ac Wi-Fi + up to 2x LTE modem + 4x Gigabit Ethernet managed switch + 2WAN + 2 serial ports that supports advanced function of VPN, Load-balancing**(Basic & Full package), EMMC Flash Storage** , TWCC**, Protocol gateway(Modbus), Wi-Fi roaming** and LTE quad SIM fail-over for industrial applications. The dual core

CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Optional TWCC (Train Wireless Carriage Coupling) for auto coupling**

IWMR-3004 series supports optional TWCC** (Train Wireless Carriage Coupling) that enables auto wireless coupling to

reconnect APs.

Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, IWMR-3004 can allow auto-swap, failover & failback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by “Load Balancing** with 8 schemes between multiple WANs.

With one mobile LTE module (1L model), 2 SIM card slots, IWMR-3004 provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

Optional EMMC Flash storage**

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

IEEE 802.11ac dual band radio up to 2.6Gbps bandwidth

With IEEE 802.11ac capability, IWMR-3004 can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6Gbps bandwidth (1.3Gbps per 1AC). It is also compatible with 802.11g/n that can work with 2.4GHz for longer range transmission.

The Wi-Fi 11ac supports AP/BRIDGE/AP Client modes can be diverse for most of wireless application. Working with load-balancing** “Priority” mode, the AP client can enable router to transmit on Wi-Fi with first priority.

Air-teaming for wireless high-sustainability and aggregated bandwidth**

The innovative Air-teaming** can combines multiple wireless links to achieve both high-sustainability and aggregated bandwidth. High sustainability can keep the network traffic alive even one link is down or severely interfered. Aggregated bandwidth can bind two link channels to provide the maximum throughput.

MIMO technology with 3T3R and SMA type connectors

Lantech IWMR-3004 series adapts MIMO technology with smart antenna transmission and reception for 3T3R. With six external detachable omni connectors and optional antennas, IWMR-3004 can have better Wi-Fi & LTE/GPS coverage.

Optional 802.11r fast roaming**

IWMR-3004 support fast roaming** (optional) in coordination with Lantech Wireless Controller to allow encryption keys to be stored on all of the APs in a network. Client mode supports PMK** Caching and pre-authentication.

Wireless WMM QoS

IWMR-3004 supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (WIFI multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP, AES), 802.1x ensures the best security and active defense against security trends. Lantech IWMR-3004 support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 8 mechanisms for multi-WANs (premium license)**

IWMR-3004 supports Load Balancing** for LTE/WAN connections. There are eight schemes for Load Balancing** function:

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link, that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

2 port serial connection, Modbus gateway

It builds in 2 port serial connection for RS232, RS422, 485 in which RS422/485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, IWMR-3004

support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE, IPGRE, and NAT for various VPN applications.

The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP / UDP port number.

DIDO for alarm & e-mail notice; Event log; Remote Web/SMS** control

2 sets of DIDO functions can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IWMR-3004 will immediately send email and trap.

When the router is at remote area with limited access, Web/SMS** control can help to get router status or remotely reboot.

24V/HV isolated input voltage selection: dual 9V-60VDC (24V model) or single 90-305VAC/120-430VDC (HV model)

The IWMR-3004 is able to work from 9VDC to 60VDC (24V model) Or with single high power supply at 90-305VAC / 120-430VDC (HV model).

Environmental monitoring for inside router info& alerting; Graphic WIFI & LTE signal strength

The built-in environmental monitoring can detect router ambient temperature, voltage, current where can send the syslog, email** and SMS** alert when abnormal.

The graphic WIFI & LTE signal strength shows connection status at a glance.

Ignition Sensing

Ignition sense allows you to delay power off the router with a designated time delay.

Built-in Managed Switch Function

Managed switch function is built-in and provides various L2+ functions for network access deployment. It delivers ports and PoE management, VLAN, QoS, multicast, redundant ring, and security functions.

USB port for back up, restore configuration and upgrade firmware; Dual image firmware*

The built-in USB port can upload/download the configuration through USB dongle for router replacement

It support dual-image firmware* to choose which one to start.

Editable login page of captive portal

The IWMR-3004 supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized industrial design and FCC*, CE*& E-marking** certificate

The IWMR-3004 is designed to meet with industrial network environment with IP 30 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards.

With CE & FCC radio certification for WIFI and LTE and E-marking** certificate, the IWMR-3004 is best for outdoor community, vehicle, process control automation etc application. For more usage flexibilities, IWMR-3004 supports wide operating temperature from -20°C to 70°C or -40°C to 70°C (-E)

FEATURES & BENEFITS

- High Speed Air Connectivity: WLAN interface support up to 2.6Gbps link speed(2AC) or 1.3Gbps (1AC)
- Built-in 4 Gigabit Ethernet switch + 2WAN ports
- Dual DC isolated input from 9V-60VDC for 24V model
- Optional TWCC** (Train Wireless Carriage Coupling) for auto wireless coupling
- Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n
- EMMC-FLASH storage**8/16/32G
- Support 2.4Ghz operating within the following frequency bands:
 - 2.412-2.472 GHz
- Support 5Ghz operating within the following frequency bands:
 - 5.180-5.825 GHz
- MIMO smart antenna technology with 3T3R
- 6 SMA type connectors for Wi-Fi & LTE, GPS
- Optional Air-teaming** protection(2AC)
 - **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
 - **Aggregated bandwidth :** The bandwidth of two link members can be aggregated to provide maximum throughput
- Output power : <24dBm
- Transmit power adjustment
- VAP (virtual access point) support up to 16 SSIDs
- Operation modes : AP/ BRIDGE / Client
- IEEE 802.11h DFS and automatic TPC
- Traffic control for each SSID**
- Band preference for same SSID services on dual band**
- Rate selection to disable low data rate access**

- **Highly Security Capability:** WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)
- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6 & IPv4 protocol
- Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported
- Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.
- Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.
- Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization
- Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE , IPGRE and NAT for secured network connection
- The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP/UDP port number
- NAT/DMZ/Port Forwarding
- Support SNMP*v1/v2c/v3
- Dual concurrent LTE 4G/3G design (2L model)for auto-swap/failover/failback between multiple ISPs for continuous service (four SIM card slots)
- One LTE 4G/3G w/ 2 SIM card design(1L model) for mobile redundancy
- GPS/ GLONASS (support by LTE module) connection
- Fast roaming** (Optional) between APs by Wireless Controller
- Load Balancing** supports 8 mechanism between multiple WANs


Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.

	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.


- Built-in 2 x serial ports(RS232/RS422/RS485)
- Serial port with 2.5KV isolation on RS422/RS485
- Supports 2DI/2DO (Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP for serial ports
- Event alerting by Syslog, Email, SMS** text, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web/SMS** control to get status or re-boot by Web or SMS**
- Graphic LTE & WIFI signal strength
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal
- Dual image firmware* to choose which to start
- Firmware upgradeable through TFTP/FTP/HTTP
- Configuration backup and restoration
 - Supports text configuration file for system quick installation
 - USB port to upload/download configuration by USB dongle
- Reset button for factory default mode
- Support editable captive portal login page
- IP 30 housing for industrial environment
- DIN-Rail and Wall-mount** installation
- Operation temperature -20~70°C or -40~70°C (-E)

DIMENSIONS (unit=mm)

24V model

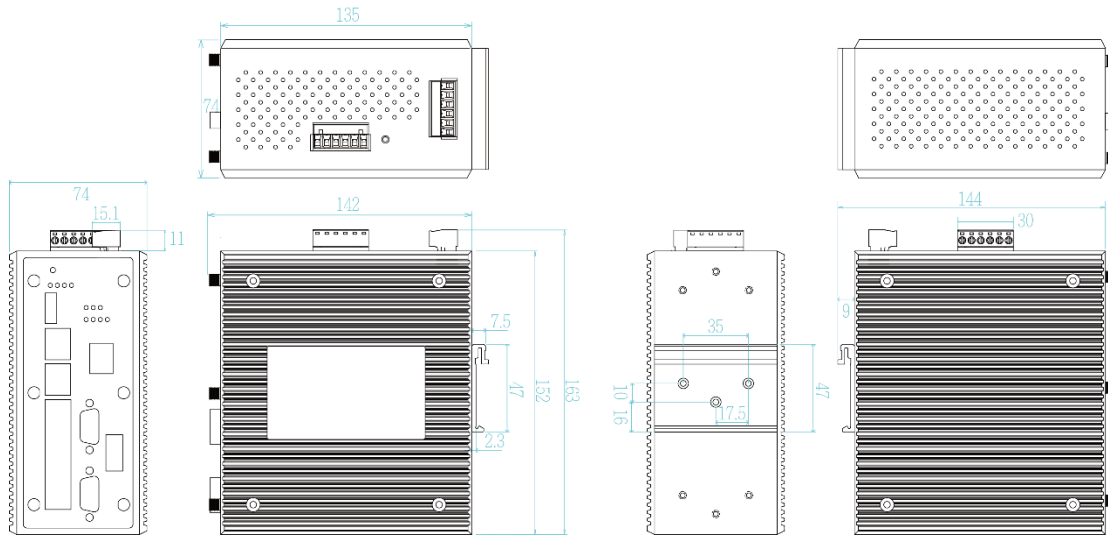

HV model

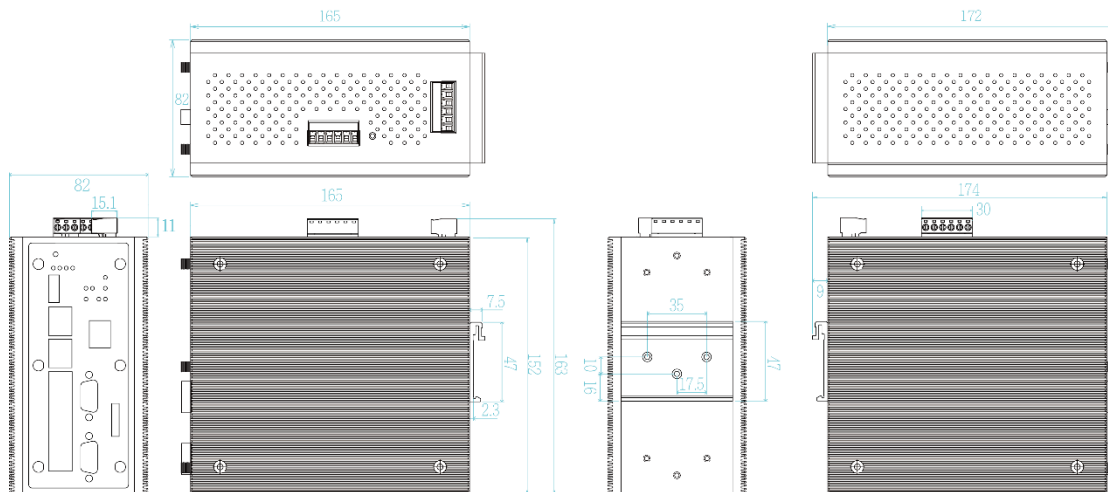

SPECIFICATION

WLAN Interface		
Operating Mode	AP/BRIDGE/Client modes	
Radio Frequency Type	DSSS, OFDM	
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz	IEEE 802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE802.11n: up to 450Mbps
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps	Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0~MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)
Modulation	802.11b: DSSS 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	
Operating Frequency	IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz	Output Power Tx +/- 2dB(per chain) 20dBm @ 6~24Mbps 16dBm @ 36~54Mbps
Transmission Rate	IEEE802.11ac: up to 1300Mbps	

	19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80) 13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Load Balancing** 8 schemes for multiple WAN(client mode) Fixed(standard) Manually route by traffic type through fixed WAN link.
Encryption Security	WEP : (64-bit , 128-bit key supported) WPA/WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP-TLS,EAP-TTLS, and PEAP	Basic Package** Failover Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs. Priority Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Weighted Round-Robin Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Custom Route Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
Wireless Security	SSID broadcast disable	Full Package incl. Basic package** Sticky Session* Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Smallest load* Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Fastest* Routes connections through the WAN link with lowest latency time.
Cellular Interface		
Location Solutions	GPS, Glonass (EU/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)	Security WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)/SSH/SSL/HTTPS
Band Options	APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/1900/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B41) EU & USA model LTE: 2100/1800/2600/900/800 MHz (B1/B2/B3/B4/B5/B7/B12/B13/B20/B25/B26/B29/B30/B41) WorldWide (WW model) LTE: 2100/1900/1800/1700/850/2600/900/1800/700/700/850/850/800/850/700/2300/1500/2500/3500/3700/5200/3600/1700 (B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B18/B19/B20/B26/B28/B29/B30/B32/B41/B42/B43/B46/B48/B66)	Authentication Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported SSID 16 sets Login Security Supports IEEE802.1x Authentication/RADIUS Access Security HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3) Protocol PPPoE Client,DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DDoS; IP address filter / Mac address filter / TCP/UDP port name),VRRP**, DDNS* Protocol Gateway Modbus on serial ports Management SNMP*v1, v2c, v3/ Web/Telnet/CLI Client mode PMK** Caching and pre-authentication.
Data Rates – LTE	APAC & Australia (APAC model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps Americas & EMEA (EUNA model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps WorldWide (WW model) Downlink: Cat 12: 600 Mbps Cat 9: 450 Mbps Uplink: Cat 13: 150 Mbps	Environmental Monitoring System status for input voltage, current , ambient temperature to be shown in GUI and sent alerting if any abnormal status Graphic signal display Graphic WIFI & LTE signal strength Timer Built-in Real Time Clock to keep track of time always(RTC) Discovery IEEE 802.1ab Link Layer Discovery Protocol (LLDP) SNMP trap Device cold / warm start Port link up / link down D/D/O high / low Remote Web/SMS** control To reboot or get status of router by Web UI or SMS** Captive portal Editable captive portal login page Maintenance Firmware upgradeable through TFTP/FTP/HTTP Configuration backup & restore Supports text configuration file for system quick installation USB port to upload/download configuration by USB dongle
Software		
IPv6/4	Present	Physical Ports & System Connectors 10/100/1000T: 6x ports RJ 45(4 Giga + 2WAN ports) USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 DB9 SIM card slots : 4(2L) or 2(1L) SMA connector : 6 Power & P-Fail connector: 1 x 6-pole terminal block DIDO : 1 x 5-pole terminal block Serial Baud Rate 1000Kbps high data rate, 250kbps normal for RS232 ; 20Mbps high data rate, 250kbps normal for RS422/485 Serial Data Bits 5, 6, 7, 8 Serial Parity odd, even, none, mark, space Serial Stop Bits 1, 1.5, 2
Fast Roaming **	802.11r (optional)	
TWCC**	Optional Train Wireless Carriage Coupling for Auto wireless Coupling	
Air-teaming**(2AC)	<ul style="list-style-type: none"> High sustainability with fail over link Aggregated bandwidth 	
WMM	WiFi multimedia and 802.11e traffic prioritization	
VPN	Multi-site VPN, Open VPN, PPTP**, L2TP over IPsec, IPsec, L2 over GRE, IPGRE and NAT	
Firewall	DDoS, IP address filter / Mac address filter / TCP/UDP port number.	

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	Enclosure	IP 30 aluminum case
RS-422	Tx+, Tx-, Rx+, Rx-, GND	Dimension	74 (W) x 142 (D) x 152 (H) mm (24V model) 82 (W) x 172 (D) x 152 (H) mm (HV model)
RS-485 (2-wire)	Data+, Data-, GND	Weight	900g
Isolation protection	RS422/485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO 3KV isolation Input power 1.5KVA isolation	Environmental	
EMMC Storage**	8/16/32 GB	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA	Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F) -40°C ~ 70°C (-40°F ~ 158°F) -E model
LED Indicators		Operating Humidity	5% to 95% Non-condensing
Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Ring Master(Green) Storage(Green), Serial1/Serial2(Green) ,Ready(Green)	Regulatory approvals	
10/100/1000Base-T(X) port indicator	Link/Activity (Green), Speed (Yellow),	EMC	FCC* Part 15 Class A, EN55032*
SIM	Green for Link/Act	EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
GPS	Green for Link/Act	E-marking**	E 13
Fault	Red: Ethernet link down or power down	MTBF	NA
Fault contact		Warranty	5 years
Relay	Relay output to carry capacity of 1A at 24VDC	*Future Release **Optional	
Power			
Input power	Dual DC isolated input, 9~60VDC (24V model) Single HV isolated input, 90~305VAC/120~430VDC (HV model)		
Power consumption (Typ.)	30.5W (1L1AC)		
Physical Characteristic			

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-92dBm	±2dB
	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-77dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-71dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
5GHz 802.11ac VHT80	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB	

ORDERING INFORMATION

For -40~70C operational temperature model, the model name will add -E

- **IWMR-3004-2L-1AC-2S-24V-EUNA.....P/N: 8620-011**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-2L-1AC-2S-24V-WW.....P/N: 8620-012**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-2L-1AC-2S-24V-APAC.....P/N: 8620-013**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-2L-1AC-2SA-24V-EUNA.....P/N: 8620-0111**
Industrial Dual LTE(Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-2L-1AC-2SA-24V-WW.....P/N: 8620-0121**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-2L-1AC-2SA-24V-APAC.....P/N: 8620-0131**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-1AC-2S-24V-EUNA.....P/N: 8620-021**

- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-1AC-2S-24V-WW.....P/N: 8620-022**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-1AC-2S-24V-APAC.....P/N: 8620-023**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-1AC-2SA-24V-EUNA.....P/N: 8620-0211**
- Industrial One LTE(Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-1AC-2SA-24V-WW.....P/N: 8620-0221**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-1AC-2SA-24V-APAC.....P/N: 8620-0231**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-2AC-2S-24V-EUNA.....P/N: 8620-031**
- Industrial One LTE(Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-2AC-2S-24V-WW.....P/N: 8620-032**
- Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-2AC-2S-24V-APAC.....P/N: 8620-033**
- Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-2AC-2SA-24V-EUNA.....P/N: 8620-0311**
- Industrial One LTE(Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-2AC-2SA-24V-WW.....P/N: 8620-0321**
- Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-1L-2AC-2SA-24V-APAC.....P/N: 8620-0331**
- Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; dual isolated input 9V~60VDC; -20~70C
- **IWMR-3004-2L-1AC-2S-HV-EUNA.....P/N: 8620-034**
- Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-2L-1AC-2S-HV-WW.....P/N: 8620-035**
- Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-2L-1AC-2S-HV-APAC.....P/N: 8620-036**
- Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-2L-1AC-2SA-HV-EUNA.....P/N: 8620-0341**
- Industrial Dual LTE(Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-2L-1AC-2SA-HV-WW.....P/N: 8620-0351**
- Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-2L-1AC-2SA-HV-APAC.....P/N: 8620-0361**
- Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-1AC-2S-HV-EUNA.....P/N: 8620-037**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-1AC-2S-HV-WW.....P/N: 8620-038**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-1AC-2S-HV-APAC.....P/N: 8620-039**
- Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-1AC-2SA-HV-EUNA.....P/N: 8620-0371**
- Industrial One LTE(Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; single high power 90~305VAC / 120~430VDC; -

- 20~70C
- **IWMR-3004-1L-1AC-2SA-HV-WW.....P/N: 8620-0381**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-1AC-2SA-HV-APAC.....P/N: 8620-0391**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-2AC-2S-HV-EUNA.....P/N: 8620-040**
Industrial One LTE(Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-2AC-2S-HV-WW.....P/N: 8620-041**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-2AC-2S-HV-APAC.....P/N: 8620-042**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-2AC-2SA-HV-EUNA.....P/N: 8620-0401**
Industrial One LTE(Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; EU and US band ; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-2AC-2SA-HV-WW.....P/N: 8620-0411**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; Worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3004-1L-2AC-2SA-HV-APAC.....P/N: 8620-0421**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 4 Giga Ethernet managed switch + 2WAN ports; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C

- EMMC Flash Storage**
- **8G.....P/N: 8850-113**
- **16G.....P/N: 8850-114**
- **32G.....P/N: 8850-115**
- Software License**
- **LOAD BALANCING Basic Package.....P/N: 9000-101**
- **LOAD BALANCING Full Package.....P/N: 9000-102**
- **TWCC.....P/N: 9000-103**
- **WIRELESS ROAMING.....P/N: 9000-107**

OPTIONAL ACCESSORIES

LTE Antenna

- **ANT11000041** 791-960/1710~2170/2500~2700MHZ, SMA plug, EU
- **ANT11000042** 704-960/1710~2170MHZ, SMA plug, US

Wireless Connector Adapter

- **ADA11000052** RP SMA Jack Base, Length : 1M

Wireless Antenna

- **ANT11000051** 2.4G&5.8GHz SMA Omni-directional / dipole antenna, 2dBi or 5.8GHz 3dBi

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at any time, without notice.