

IGS-022DSFP

1 100M/1000M SFP + 1 1000M SFP Industrial Ethernet Switch Converter

- 12V to 48V dual input
- Relay contact to connect with alarm system
- DIP switch for Speed selection of Port 1
- Fault LED to display status of Dual power input
- Wide operating temperature range from -40°C to 75°C



OVERVIEW

The Lantech IGS-022DSFP is a 1 100M/1000M SFP + 1 1000M SFP Industrial Ethernet Switch Converter with LLF function. This slim Converter is wall-mountable** or DIN rail mountable, making installation easier and flexible.

The Lantech IGS-022DSFP is designed to meet the demands of Industrial environments, comes packaged in a robust IP30


housing and has been tested extensively to meet Industrial EMI and EMC standards. Rigorous mechanical testing has also been undertaken to comply with free fall, shock and vibration stability test requirements.

The switch converter supports wide operating temperature, range from -40°C to 75°C.

FEATURES & BENEFITS

- DIP switch to adjust SFP 100M or 1000M speed on first SFP port
- Built in Link Loss Forwarding Technology
- Supports wide operating temperature (-40°C~75°C)
- Redundant power with polarity reverse protection
- IP-30 protection with DIN Rail and Wall Mount design
- Relay output for power fail and alarm

DIMENSIONS (unit=mm)

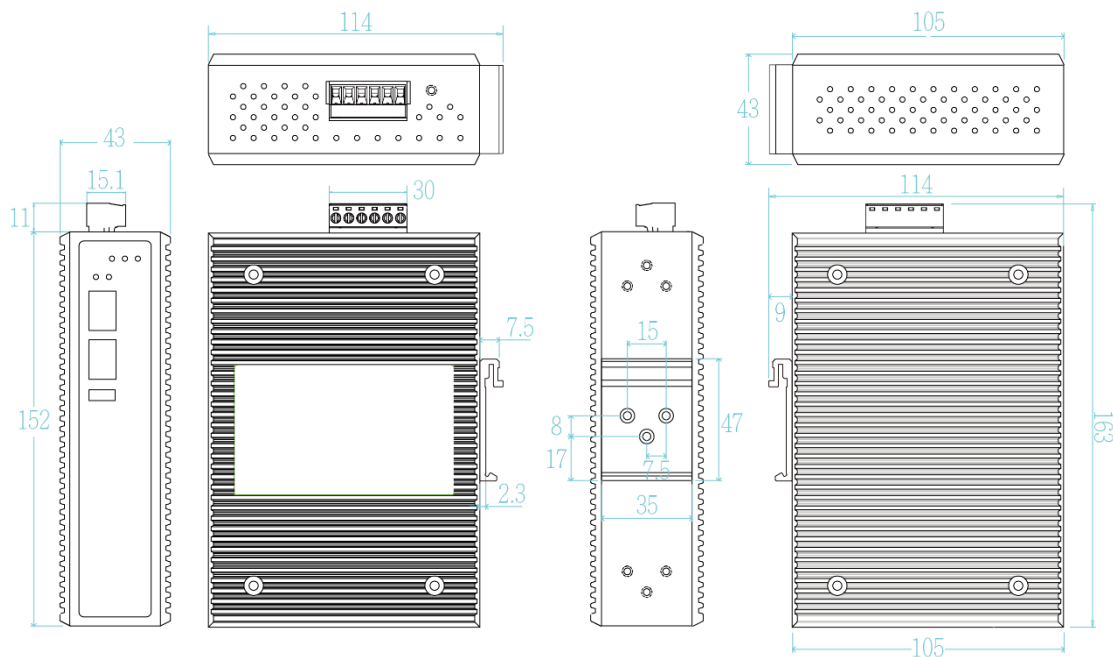

SPECIFICATION

Hardware Specification		Case Dimension	IP30, 43mm (W) x 152mm (H) x 105mm (D)	
Transfer Rate	148,800pps for 100M speed SFP 1,488,000pps for Gigabit speed SFP	Installation	DIN rail or Wall mounting design	
Link Loss Forward	Ensures high availability by disabling both bridged interfaces if one interface fails	EMC/EMI	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN55032 Class A, CE EN55024	
Connector	Mini-GBIC: 1 x 100M/1000M Dual Speed SFP Socket (adjust by DIP switch) 1 x 1000M SFP Socket		Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
DIP Switch	SFP Speed 1000M or 100M		Safety	EN 60950-1
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Red) SFP port: LNK/ACT(Green)		MTBF	1,890,546 hrs (IEC 62830 standards)
Power Supply	Dual DC 9.5V~56V	Warranty	5 years	
Operating Humidity	5% to 95% (Non-condensing)			
Operating Temperature	-40°C ~ 75°C			
Storage Temperature	-40°C ~ 85°C			

ORDERING INFORMATION

- **IGS-022DSFP.....P/N: 8350-9651**
1 100M/1000M SFP + 1 1000M SFP Industrial Ethernet Switch Converter w/ LLF; 9.5~56V;-40~75C

OPTIONAL ACCESSORIES

DIN Rail Power

- **MDR-40 Series** 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- **MDR-20 Series** 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Mini GBIC (SFP)

- | | |
|---|--|
| ■ 8330-162X MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver | ■ 8330-065 MINI GBIC 100Base (LC/MM/5KM) Transceiver |
| ■ 8330-163X MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver | ■ 8330-061 MINI GBIC 100Base (LC/SM/30KM) Transceiver |
| ■ 8330-165X MINI GBIC 1000LX (LC/SM/10KM) Transceiver | ■ 8330-197 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/SM/40KM) Transceiver | ■ 8330-198 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) |
| ■ 8330-166 MINI GBIC 1000XD (LC/SM/50KM) Transceiver | ■ 8330-195 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310) |
| ■ 8330-169 MINI GBIC 1000XD (LC/SM/60KM) Transceiver | ■ 8330-196 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/SM/80KM) Transceiver | ■ 8330-188 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) |
| ■ 8330-170 MINI GBIC 1000EZ (LC/SM/120KM) Transceiver | ■ 8330-189 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550) |
| ■ 8330-060 MINI GBIC 100Base (LC/MM/2KM) Transceiver | ■ 8330-186 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310) |

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.