

IWMR-3002

Industrial Multifunction VPN Router w/up to 2x WiFi 11ac + up to 2 LTE 4G + 2 serial ports + 2 Gigabit Ethernet w/Load Balancing, TWCC**, VPN, Protocol Gateway, Storage**; 24V / HV input**

- Up to 2 concurrent WiFi 11ac and redundancy(1L-2AC model)
- Up to 2 concurrent modem for 3G/4G LTE Link & GPS(2L-1AC model/4 SIMs)
- Optional TWCC**(Train Wireless Carriage Coupling) for auto wireless coupling
- Built-in 2 Gigabit Ethernet ports (1LAN+1WAN or 2LAN)
- Dual radio for 802.11ac/a/b/g/n with concurrent 5GHz & 5GHz bands up to 2.6Gbps Wi-Fi bandwidth(2AC model)
- MIMO technology 3T3R; SMA type up to 6 external antenna
- Fast roaming**, 802.11r standard
- Supports AP/Bridge /Client modes
- Air teaming** for Wi-Fi high-sustainability and aggregated bandwidth
- VPN router for Multi-site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE , IPGRE
- Load Balancing support 8 mechanism
- Optional EMMC Flash storage on-board**
- Support NAT and Firewall
- Support Modbus gateway
- Support 2/4 RS422/485 ports with 2.5KV isolation or 2/4x RS232 ports(RJ45 model only)
- Dual isolated input range from 9V to 60VDC (24V model); Single isolated input power 90~305VAC/120~430VDC (HV model) (M12 model)
- Vehicle E-marking* certificate
- Wi-Fi & LTE graphic signal strength
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware*
- ITxPT compliant w/ ignition function*



RJ45 model



M12 model



OVERVIEW

Lantech IWMR-3002 series is a next generation industrial multi-function VPN router w/up to 2x 802.11ac Wi-Fi + up to 2x LTE modem + 2x Gigabit Ethernet + 2 serial ports that supports advanced function of VPN, Load-Balancing (Basic & Full Package) , EMMC Flash Storage**, TWCC**, Protocol gateway(Modbus) , Wi-Fi roaming** and LTE quad SIM fail-over for industrial applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Optional TWCC (Train Wireless Carriage Coupling) for auto coupling**

IWMR-3002 series supports optional TWCC** (Train Wireless Carriage Coupling) that enables auto wireless coupling to reconnect APs.

Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, IWMR-3002 can allow auto-swap, failover & fallback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by

“Load Balancing with 8 schemes between multiple WANs.

With one mobile LTE module, 2 SIM card slots, IWMR-3002 provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

Optional EMMC Flash storage**

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

IEEE 802.11ac dual band radio up to 2.6Gbps bandwidth

With IEEE 802.11ac capability, IWMR-3002 can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6Gbps bandwidth (1.3Gbps per 1AC). It is also compatible with 802.11g/n that can work with 2.4GHz for longer range transmission.

The Wi-Fi 11ac supports AP/BRIDGE/AP Client modes can be diverse for most of wireless application. Working with

load-balancing "Priority" mode, the AP client can enable router to transmit on Wi-Fi with first priority.

Air teaming for wireless high-sustainability and aggregated bandwidth**

The innovative Air-teaming protection can combines multiple wireless links to achieve both high-sustainability and aggregated bandwidth. High sustainability can keep the network traffic alive even one link is down or severely interfered. Aggregated bandwidth can bind two link channels to provide the maximum throughput.

MIMO technology with 3T3R and SMA type connectors

Lantech IWMR-3002 series adapts MIMO technology with smart antenna transmission and reception for 3T3R. With six external detachable omni connectors and optional antennas, IWMR-3002 can have better Wi-Fi coverage.

Optional 802.11r fast roaming **

IWMR-3002 support fast roaming ** (optional) in coordination with Lantech Wireless Controller to allow encryption keys to be stored on all of the APs in a network. Client mode supports PMK** Caching and pre-authentication (move to roaming section).

Wireless WMM QoS

IWMR-3002 supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (Wi-Fi multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP, AES), 802.1x ensures the best security and active defense against security trends. Lantech IWMR-3002 support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 8 mechanism for multi-WANs (premium license pack)

IWMR-3002 supports Load Balancing for LTE/WAN (client mode) connections. There are eight schemes for Load Balancing function:

Pack	Algorithm	Description
Basic Package	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.

Full Package** (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

2 port serial connection, Modbus gateway

It builds in 2 port serial connection for RS232, RS422, 485 in which RS422/485 has 2.5KV isolation protection. (RJ45 model only)

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, IWMR-3002 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE, IPGRE, and NAT for various VPN applications.

The built-in Layer-4 firewall includes DDos, IP address filter / Mac address filter / TCP/UDP port number

DIDO for alarm & email notice; Event log; Remote Web/SMS** control**

2 sets of optional DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IWMR-3002 will immediately send email and trap.

When the router is at remote area with limited access, Web/SMS** control can help to get router status or remotely reboot.

24V/HV isolated input voltage selection: dual 9V-60VDC (24V model) or single 90-305VAC/120-430VDC (HV model)

The IWMR-3002 is able to work from 9VDC to 60VDC (24V model) Or with single high power supply at 90-305VAC / 120-430VDC (HV model).

Built-in 2 port Gigabit Ethernet

2 port Gigabit Ethernet can be supported as 1LAN+1WAN or 2LAN models.

Graphic Wi-Fi & LTE signal strength

The graphic Wi-Fi & LTE signal strength shows connection status at a glance

USB port for back up, restore configuration and upgrade firmware; Dual image firmware*

The built-in USB port can upload/download the configuration through USB dongle for router replacement.

It supports dual-image firmware* to choose which one to start.

Ignition Sensing

Ignition sense allows you to delay power off the router with a designated time delay.

Editable login page of captive portal

The WMR-3002 supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized industrial design and FCC*, CE* & E-marking**

certificate

The IWMR-3002 is designed to meet with outdoor network environment with IP 30 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards. With CE & FCC radio certification for Wi-Fi and LTE and E-marking** certificate, the IWMR-3002 is best for outdoor community, vehicle, process control automation etc. application.

For more usage flexibilities, IWMR-3002 supports wide operating temperature from -20°C to 70°C or -40°C to 70°C(-E)

EN50155, 61373 verification*;

The IWMR-3002 series is also applicable for railway on-board/track side, vehicle and mining applications for more usage flexibilities.

FEATURES & BENEFITS

- High Speed Air Connectivity: WLAN interface support up to 2.6Gbps link speed(2AC) or 1.3Gbps (1AC)
- Built-in 2 Gigabit ports and 1LAN+1WAN or 2LAN
- Optional TWCC** (Train Wireless Carriage Coupling) for auto wireless coupling
- EMMC-FLASH storage** 8/16/32G
- Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n
- Support 2.4Ghz operating within the following frequency bands:
 - 2.412~2.472 GHz
- Support 5Ghz operating within the following frequency bands:
 - 5.180~5.825 GHz
- MIMO smart antenna technology with 3T3R with 6 SMA type connectors and optional antennas
 - * Optional Air-teaming protection(2AC)
 - * **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
 - * **Aggregated bandwidth :** The bandwidth of two link members can be aggregated to provide maximum throughput-
- IEEE 802.11h DFS and automatic TPC
- Output power : <24dBm
- Transmit power adjustment
- VAP (virtual access point) support up to 16 SSIDs
- Operation modes : AP / Bridge / Client
- Traffic control for each SSID**
- Band preference for same SSID services on dual band**
- Rate selection to disable low data rate access**
- Highly Security Capability: WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)
- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6 & IPv4 protocol
- Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported
- Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.

- Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.
- Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization
- Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE , IPGRE and NAT for secured network connection
- The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP/UDP port number
- Support SNMP*v1/v2c/v3
- NAT/DMZ/Port Forwarding
- Dual concurrent LTE 4G/3G design (2L model)for auto-swap/failover/failback between multiple ISPs for continuous service (four SIM card slots)
- One LTE 4G/3G w/ 2 SIM card design(1L model) for mobile redundancy
- GPS & GLONASS connection
- Load Balancing supports 8 mechanism between multiple WANs

Pack	Algorithm	Description
Basic Package	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.


Full Package** (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

- Built-in 2 x serial ports(RS232/RS422/485) (RJ45 model only)
- Serial port with 2.5KV isolation on RS422/485 (RJ45 model only)
- Supports optional 2DI / 2DO(Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP
- Event alerting by Syslog, SNMP Trap, Email, SMS** text,


- Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web/SMS** control to get status or re-boot by Web
- Built-in RTC to keep track of time always
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Reset button for factory default mode
- Graphic LTE & WIFI signal strength
- Firmware upgradeable through TFTP/FTP/HTTP
- Configuration backup and restoration
 - Supports text configuration file for system quick installation
 - USB port to upload/download configuration by USB dongle
- Support editable captive portal login page
- IP 30 housing for industrial environment
- DIN-Rail and Wall-mount** installation
- Operation temperature -20~70°C or -40°C to 70°C(-E)
- Wide range input voltage from 9V-60V
- ITxPT compliant w/ ignition function*

DIMENSIONS (unit=mm)


24V model

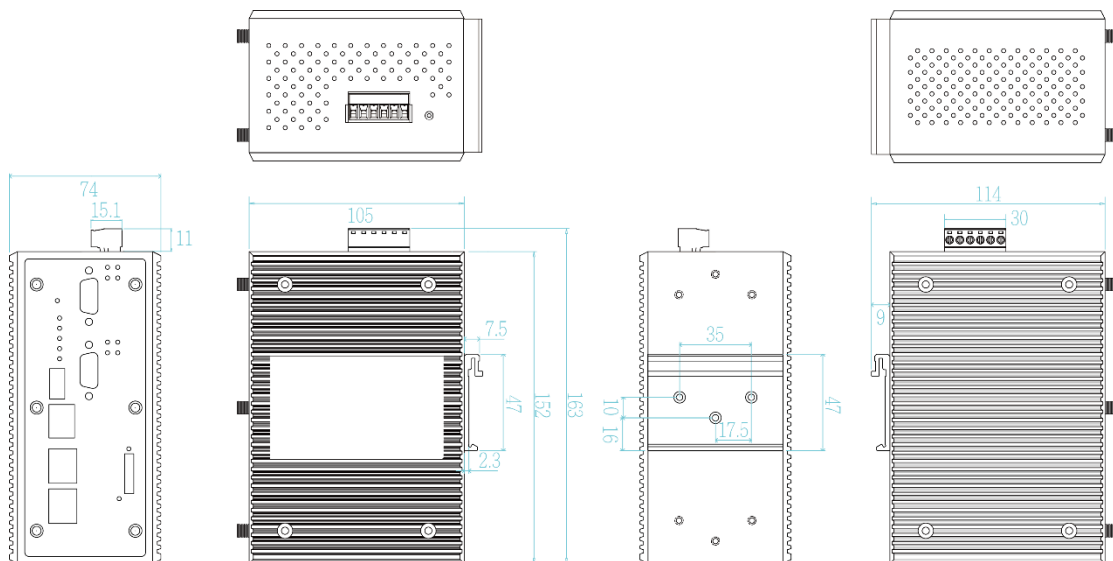

M12 Model

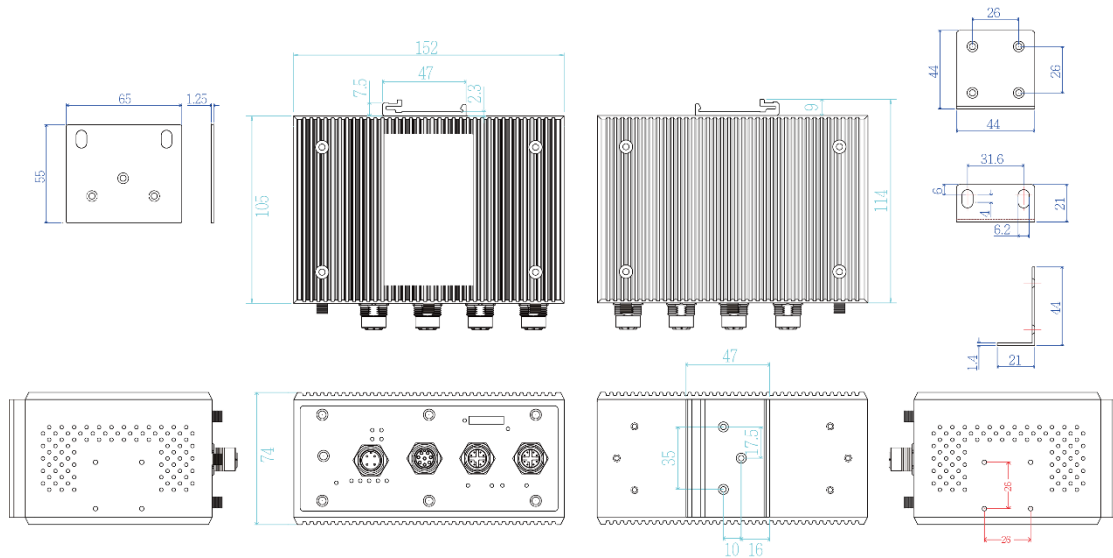

HV model

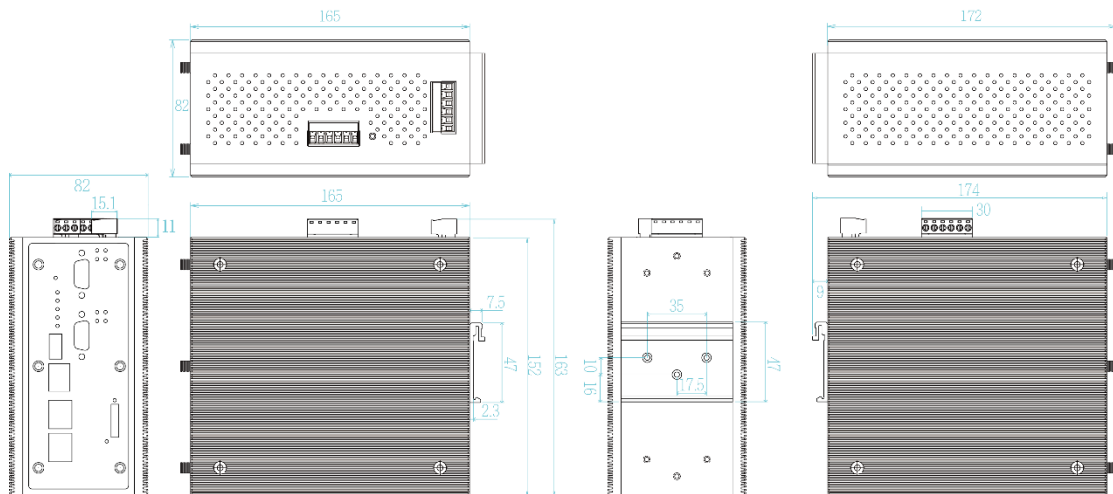

SPECIFICATION

WLAN Interface			
Operating Mode	AP/BRIDGE/Client modes	IEEE 802.11b/g/n(2.4Gbps)	IEEE802.11n: up to 450Mbps
Radio Frequency Type	DSSS, OFDM		Output Power Tx +/- 2dB(per chain) 18dBm @ 1-11Mbps 18dBm @ 6-54Mbps 20/20dBm @ MCS0-MCS7 (HT20/40)
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz	IEEE 802.11a/n/ac(5Gbps)	Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1-11Mbps ≤ -92dBm @ 6-18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps		Output Power Tx +/- 2dB(per chain) 20dBm @ 6-24Mbps 16dBm @ 36-54Mbps 19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80)
Modulation	802.11b: DSSS 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)		
Operating Frequency	IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz		
Transmission Rate	IEEE802.11ac: up to 1300Mbps IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps		

	13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Basic Package
Encryption Security	WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP.TLS,EAP.TTLS,EAP PEAP	Fixed Manually route by traffic type through fixed WAN link. Failover Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs. Priority Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Weighted Round-Robin Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Custom Route Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
Wireless Security	SSID broadcast disable	Full Package** incl. basic package
Cellular Interface		Sticky Session* Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Smallest Load* Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Fastest* Routes connections through the WAN link with lowest latency time.
Location Solutions	GPS, Glonass (EU/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)	Fast Roaming** 802.11r work with Lantech controller Air-teaming protection(2AC)** • High sustainability with fail over link • Aggregated bandwidth
Band Options	APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/1900/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B41) EUNA & USA model LTE: 2100/1800/2600/900/800 MHz (B1/B2/B3/B4/B5/B7/B12/B13/B20/B25/B26/B29/B30/B41) WorldWide (WW model) LTE: 2100/1900/1800/1700/850/2600/900/1800/700/700/850/850/800/850/700/2300/1500/2500/3500/3700/5200/3600/1700 (B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B18/B19/B20/B26/B28/B29/B30/B32/B41/B42/B43/B46/B48/B66)	WMM Wi-Fi multimedia and 802.11e traffic prioritization Security WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)/SSH/SSL/HTTPS Authentication Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported SSID 16 sets Client mode PMK** Caching and pre-authentication. Timer Built-in Real Time Clock to keep track of time always(RTC) Discovery IEEE 802.1ab Link Layer Discovery Protocol (LLDP) SNMP trap Device cold / warm start Port link up / link down DI / DO high / low**
Data Rates – LTE	APAC & Australia (APAC model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps Americas & EMEA (EUNA model) Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps WorldWide (WW model) Downlink: Cat 12: 600 Mbps Cat 9: 450 Mbps Uplink: Cat 13: 150 Mbps	Graphic signal display Graphic LTE & Wi-Fi signal strength Remote Web/SMS** control To reboot or get status of router by WebUI or SMS** Captive portal Editable captive portal login page Maintenance Firmware upgradeable through TFTP/FTP/HTTP Configuration backup & restore Supports text configuration file for quick system installation USB port to upload/download configuration by USB dongle
Software		Physical Ports & System
IP v6/4	Present	Connectors 10/100/1000T: 2x ports RJ 45 with Auto MDI/MDI-X function (2 x10/100/1000T; 8 pin X coded-M12 model) USB x 1 RS-232 connector: 1 x RJ 45 (RJ45 model only) Serial connector : 2 DB9 (RJ45 model only) SIM card slots : 4(2L) or 2(1L) SMA connector : 6 (Wi-Fi male, LTE female) Power & P-Fail connector: 1 x 6-pole terminal block DIDO **: 1 x 5-pole terminal block
Login Security	Supports IEEE802.1x Authentication/RADIUS	Serial Baud Rate 1000Kbps high data rate,250kbps normal for RS232 ; 20Mbps high data rate,250kbps normal for RS422/485
TWCC**	Optional Train Wireless Carriage Coupling for Auto wireless Coupling	Serial Data Bits 5, 6, 7, 8 Serial Parity odd, even, none, mark, space Serial Stop Bits 1, 1.5, 2
Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)	RS-232 Tx,D, Rx,D, RTS, CTS, DTR, DSR, DCD, GND RS-422 Tx+,Tx-, Rx+, Rx-,GND RS-485 (2-wire) Data+, Data-,GND
Protocol	PPPoE Client,DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DDoS; IP address filter / Mac address filter* / TCP/UDP port name),VRRP**, DDNS*	EMMC Storage** 8/16/32 GB Isolation protection RS422/485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO** 3KV isolation Input power 1.5KVA isolation
Management	SNMP*v1,v2c,v3/ Web/Telnet/CLI	
Load Balancing	8 schemes for multiple WAN	

LED Indicators		Dimension	74 (W) x 114 (D) x 152 (H) mm (24V model) 74(W) x 114(D) X 152 (H)mm (M12 model) 82 (W) x 172 (D) x 152 (H) mm (HV model)
Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Storage(Green), Serial1/Serial2 (Green),Ready(Green)	Weight	900g
10/100/1000Base-T (X) port indicator	Link/Activity (Green), Speed (Yellow)	Environmental	
SIM	Green for Link/Act	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
GPS	Green for Link/Act	Operating Temperature	-20°C ~70°C (-4°F ~ 158°F) -40°C ~70°C (-40°F ~ 158°F) -E model
WLAN LEDs	WLAN 1 ,WLAN2 Link /ACT : Green	Operating Humidity	5% to 95% Non-condensing
DI/DO**	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA	Regulatory approvals	
Fault	Red: Ethernet link down or power down	EMC	FCC* Part 15 Class A, EN55032*
Fault contact		EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Relay	Relay output to carry capacity of 1A at 24VDC	Vehicle certificate	E13** ITxPT compliant*
Power		Railway	EN50155* EN61373*
Input power	Dual DC isolated input , 9V~60VDC (24V model) Single HV isolated input, 90~305VAC/120~430VDC (HV model)	MTBF	NA
Power consumption (Typ.)	20 Watts	Warranty	5 years
Physical Characteristic		*Future Release **Optional	
Enclosure	IP 30 aluminum case		

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-92dBm	±2dB
	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-77dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB

	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
5GHz 802.11ac VHT80	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB	

ORDERING INFORMATION

For -40~70C operational temperature model, the model name will add -E
M12 model are all available with -M12 model name (-2S / -2SA is RJ45 model only)

- **IWMR-3002-2L-1AC-2S-24V-EUNA.....P/N: 8610-101**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; EU and US band; dual 9V~60VDC; -20~70C
- **IWMR-3002-2L-1AC-2S-24V-WW.....P/N: 8610-102**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; worldwide band; dual 9V~60VDC; -20~70C
- **IWMR-3002-2L-1AC-2S-24V-APAC.....P/N: 8610-103**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; APAC band; dual 9V~60VDC; -20~70C
- **IWMR-3002-2L-1AC-2SA-24V-EUNA.....P/N: 8610-104**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; EU and US band; dual 9V~60VDC; -20~70C
- **IWMR-3002-2L-1AC-2SA-24V-WW.....P/N: 8610-105**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; worldwide band; dual 9V~60VDC; -20~70C
- **IWMR-3002-2L-1AC-2SA-24V-APAC.....P/N: 8610-106**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; APAC band; dual 9V~60VDC; -20~70C
- **IWMR-3002-1L-1AC-2S-24V-EUNA.....P/N: 8610-107**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; EU and US band; dual 9V~60VDC; -20~70C
- **IWMR-3002-1L-1AC-2S-24V-WW.....P/N: 8610-108**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; worldwide band; dual 9V~60VDC; -20~70C
- **IWMR-3002-1L-1AC-2S-24V-APAC.....P/N: 8610-109**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2

- port Gigabit Ethernet; APAC band; dual 9V~60VDC; -20~70C
- **IWMR-3002-1L-1AC-2SA-24V-EUNA.....P/N: 8610-1101**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; EU and US band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-1AC-2SA-24V-WW.....P/N: 8610-1102**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; worldwide band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-1AC-2SA-24V-APACP/N: 8610-1103**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; APAC band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-2AC-2S-24V-EUNA.....P/N: 8610-1104**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 2 port Gigabit Ethernet; EU and US band; dual 9V~60VDC -20~70C
 - **IWMR-3002-1L-2AC-2S-24V-WWP/N: 8610-1105**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 2 port Gigabit Ethernet; worldwide band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-2AC-2S-24V-APACP/N: 8610-1106**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 2 port Gigabit Ethernet; APAC band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-2AC-2SA-24V-EUNA.....P/N:8610-111**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; EU and US band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-2AC-2SA-24V-WW.....P/N:8610-112**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; worldwide band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-1L-2AC-2SA-24V-APAC.....P/N:8610-113**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; APAC band; dual 9V~60VDC; -20~70C
 - **IWMR-3002-2L-1AC-2S-HV-EUNA.....P/N: 8610-114**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-2L-1AC-2S-HV-WW.....P/N: 8610-115**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-2L-1AC-2S-HV-APAC.....P/N: 8610-116**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-2L-1AC-2SA-HV-EUNA.....P/N: 8610-117**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-2L-1AC-2SA-HV-WW.....P/N: 8610-118**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-2L-1AC-2SA-HV-APAC.....P/N: 8610-119**
Industrial Dual LTE (Quad SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-1AC-2S-HV-EUNA.....P/N: 8610-120**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-1AC-2S-HV-WW.....P/N: 8610-121**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-1AC-2S-HV-APAC.....P/N: 8610-122**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-1AC-2SA-HV-EUNA.....P/N: 8610-1231**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-1AC-2SA-HV-WW.....P/N: 8610-1232**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-1AC-2SA-HV-APACP/N: 8610-1233**
Industrial One LTE (Dual SIM) One Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-2AC-2S-HV-EUNA.....P/N: 8610-1234**
Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 2 port Gigabit Ethernet; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C
 - **IWMR-3002-1L-2AC-2S-HV-WWP/N: 8610-1235**

- Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 2 port Gigabit Ethernet; worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C
- **IWMR-3002-1L-2AC-2S-HV-APACP/N: 8610-1236**

Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS232 serial ports and 2 port Gigabit Ethernet; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C

 - **IWMR-3002-1L-2AC-2SA-HV-EUNA.....P/N:8610-124**

Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; EU and US band; single high power 90~305VAC / 120~430VDC; -20~70C

 - **IWMR-3002-1L-2AC-2SA- HV-WW.....P/N:8610-125**

Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; worldwide band; single high power 90~305VAC / 120~430VDC; -20~70C

 - **IWMR-3002-1L-2AC-2SA- HV-APAC.....P/N:8610-126**

Industrial One LTE (Dual SIM) Two Wi-Fi 11ac/a/b/g/n Load Balancing** Multifunction Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet; APAC band; single high power 90~305VAC / 120~430VDC; -20~70C

EMMC Flash Storage

 - **8G.....P/N: 8850-113**
 - **16G.....P/N: 8850-114**
 - **32G.....P/N: 8850-115**

Software License

 - **LOAD BALANCING Full Package.....P/N: 9000-102**
 - **TWCC.....P/N: 9000-103**
 - **WIRELESS ROAMING.....P/N: 9000-107**

OPTIONAL ACCESSORIES

LTE Antenna

- **ANT11000041** 791-960/1710~2170/2500~2700MHZ, SMA plug, EU
- **ANT11000042** 704-960/1710~2170MHZ, SMA plug, US

Wireless Connector Adapter

- **ADA11000052** RP SMA Jack Base, Length : 1M

Wireless Antenna

- **ANT11000051** 2.4G&5.8GHz SMA Omni-directional / dipole antenna, 2dBi or 5.8GHz 3dBi

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.