

# IPMR-3006

**Industrial Multifunction VPN Router w/up to 2 LTE 4G + 2 serial ports + 6 Gigabit Ethernet Switch(incl. 4 PoE) w/ Load Balancing, VPN, Protocol Gateway, Storage\*\*; 24V input**

- Up to 2 concurrent mobility for 3G/4G LTE Link&GPS (2L model/4 SIMs)
- Support LTE Cat 6 (APAC & EUNA models) or Cat 12/9/13 (WW model)
- Built-in 6 Gigabit Ethernet switch including 4 PoE at/af w/budget 80W
- VPN router for Multi-site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP\*\*, L2 over GRE , IPGRE
- Load Balancing built-in 5 mechanism
- Optional EMMC Flash storage on-board\*\*
- Support NAT and Firewall
- Support Modbus gateway on serial ports
- Support 2 RS422/RS485 ports with 2.5KV isolation or 2x RS232 ports
- Input voltage selection 9~56VDC (24V model)
- ITxPT compliant w/ ignition function\*\*
- Environmental monitoring for router inside info with voltage, current, temperature and total PoE load; LTE graphic signal strength
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware\*



## OVERVIEW

Lantech IPMR-3006 series is a next generation industrial multi-function VPN router w/up to 2x LTE modem + 6x Gigabit Ethernet switch incl. 4 PoE ports + 2 serial ports that supports advanced function of VPN, Load-Balancing(Basic & Full Package\*\*), EMMC Flash Storage\*\*, Protocol gateway(Modbus), Storage\*\* and LTE quad SIM fail-over for industrial applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

### Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, IPMR-3006 can allow auto-swap, failover & fallback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by " Load Balancing with 8 schemes between multiple WANs.

With one mobile LTE module (1L model), 2 SIM card slots, IPMR-3006 provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

### Optional EMMC Flash storage\*\*

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

### Load Balancing with 8 mechanisms for multi-WANs (premium license)

IPMR-3006 supports Load Balancing for LTE/WAN connections. There are eight schemes for Load Balancing function:

Pack	Algorithm	Description
Basic Package	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP

		address.
<b>Full Package** (incl. basic package)</b>	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

**2 port serial connection, Modbus gateway**

It builds in 2 port serial connection for RS232, RS422, RS485 in which RS422/RS485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

**VPN and firewall**

Besides traditional VPN peer to peer tunneling, IPMR-3006 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP\*\*, L2 over GRE, IPGRE, and NAT for various VPN applications.

The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP / UDP port number.

**DIDO for alarm & email notice; Event log; Remote Web control**

2 sets of DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IPMR-3006 will immediately send email and trap.

When the router is at remote area with limited access, Web control can help to get router status or remotely reboot by Web.

**Wide range input voltage from 9V-56VDC; Built-in 6 port PoE at/af switch with 80W budget**

The IPMR-3006 is able to work from 9VDC to 56VDC for PoE at/af with PoE budget 80W @12V /80W @24V&48V that is particular good for vehicle, rail train, depot etc. application.

**Environmental monitoring for inside router info& alerting; Graphic LTE signal strength**

The built-in environmental monitoring can detect router ambient temperature, voltage, current and total PoE load where can send the syslog, email\*\* when abnormal.

**Ignition Sensing\***

Ignition sense allows you to delay power off your Ethernet switch with a designated time delay.

**Built-in Managed Switch Function**

Managed switch function is built-in and provides various L2+ functions for network aggregation deployment. It delivers ports and PoE management, VLAN, QoS, multicast, redundant ring, and security functions.

**USB port for back up, restore configuration and upgrade firmware; Dual image firmware\***

The built-in USB port can upload/download the configuration through USB dongle for router replacement

It supports dual-image firmware\* to choose which one to start.

**Ruggedized industrial design and FCC, CE & E-marking\*\* certificate**

The IPMR-3006 is designed to meet with industrial network environment with IP 30 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards.

With CE & FCC radio certification for LTE and E-marking\*\* certificate, the IPMR-3006 is best for outdoor community, vehicle, process control automation etc. For more usage flexibilities, IPMR-3006 supports wide operating temperature from -40°C to 65°C.

**FEATURES & BENEFITS**

- Built-in 6 Gigabit Ethernet switch incl. 4 PoE at/af for PoE budget 80W
- 6 SMA type connectors for LTE & GPS
- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6 & IPv4 protocol
- EMMC-FLASH storage\*\*
- Radius Authentication, EAP-TLS, EAP-TTLS, PEAP
- Support Multi-Site VPN for mesh tunneling as well as

- Open VPN, L2TP over IPsec, IPsec, PPTP\*\*, L2 over GRE , IPGRE and NAT for secured network connection
- The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP/UDP port number
- NAT/DMZ/Port Forwarding
- Support SNMP\*v1/v2c/v3
- Dual concurrent LTE 4G/3G design (2L model)for auto-swap/failover/failback between multiple ISPs for


- continuous service (four SIM card slots)
- One LTE 4G/3G w/ 2 SIM card design(1L model) for mobile redundancy
- GPS/ GLONASS (support by LTE module) connection
- Fast roaming\*\* (Optional ) between APs by Wireless Controller
- Load Balancing supports 8 mechanism between multiple WANs

	bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
Fastest*	Routes connections through the WAN link with lowest latency time.

Pack	Algorithm	Description
<b>Basic Package</b>	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
<b>Full Package** (incl. basic package)</b>	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free

- Built-in 2 x serial ports(RS232/RS422/RS485)
- Serial port with 2.5KV isolation on RS422/RS485
- Supports 2DI / 2DO (Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP for serial ports
- Event alerting by Syslog, SNMP Trap, Email, Relay ;
- Permanent local log rotation / Maxi 1K records
- Remote Web control to get status or re-boot by Web
- Graphic LTE signal strength
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal
- Dual image firmware\* to choose which to start
- Firmware upgradeable through TFTP/HTTP
- Configuration backup and restoration
  - Supports text configuration file for system quick installation
  - USB port to upload/download configuration by USB dongle
- Reset button for factory default mode
- IP 30 housing for industrial environment
- DIN-Rail and Wall-mount\*\* installation
- Operation temperature -40~65°C
- ITxPT compliant w/ ignition function\*\*

**DIMENSIONS (unit=mm)**

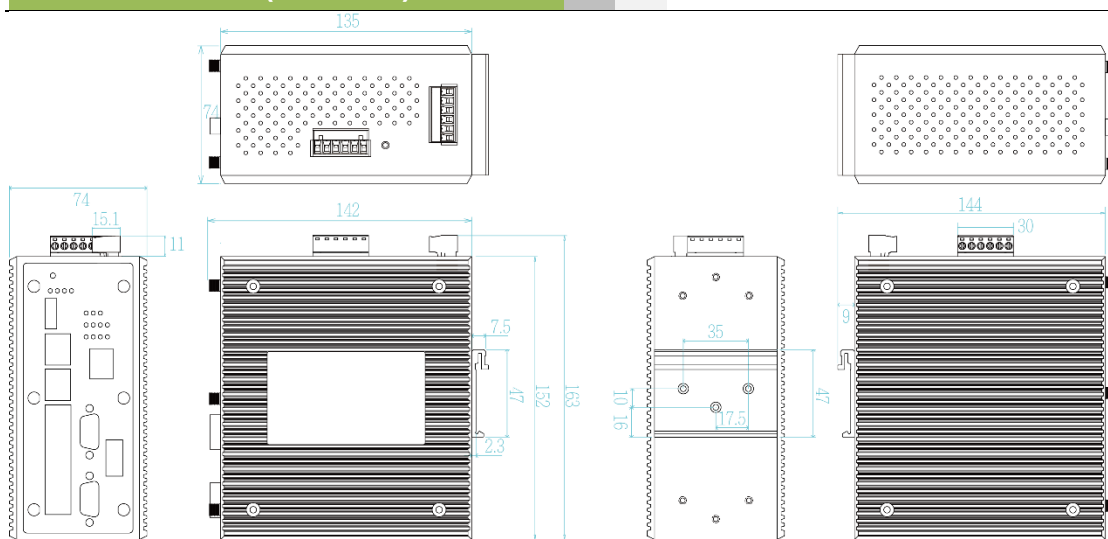

**SPECIFICATION**

Location Solutions	GPS, Glonass (EUNA/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)		Fastest*	upstream or total traffic Routes connections through the WAN link with lowest latency time.
Band Options	<b>Asia-Pacific (APAC model)</b> LTE = B1, B3, B5*, B7, B8, B18*, B19*, B21*, B28, B38 (TDD), B39* (TDD), B40 (TDD), B41* (TDD) DC-HSPA+/ HSPA+/ HSPA/ UMTS = B1, B5*, B6*, B8, B9*, B19*		Security	SSH/SSL/HTTPS
	<b>Europe &amp; North America (EUNA model)</b> LTE = B1, B2*, B3, B4*, B5*, B7, B8, B12*, B13*, B20, B25*, B26*, B29*, B30*, B41* (TDD) DC-HSPA+/ HSPA+/ HSPA/ UMTS = B1, B2*, B3, B4*, B5*, B8		Login Security	Supports IEEE802.1x Authentication/RADIUS
	<b>World Wide (WW model)</b> LTE = B1, B2*, B3, B4*, B5*, B7, B8, B9*, B12*, B13*, B18*, B19*, B20, B26*, B28, B29*, B30*, B32*, B41* (TDD), B42* (TDD), B43* (TDD), B46* (TDD), B48* (TDD), B66* WCDMA = B1, B2*, B3*, B4*, B5*, B6*, B8, B9*, B19*		Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)
			Protocol	PPPoE Client, DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DDoS); IP address filter / Mac address filter / TCP/UDP port name ), VRRP**, DDNS*
Data Rates – LTE	<b>Asia-Pacific (APAC model)</b> Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps  <b>Europe &amp; North America (EUNA model)</b> Downlink (Cat 6): FDD: 300 Mbps TDD: 222 Mbps Uplink (Cat 6): FDD: 50 Mbps TDD: 26 Mbps  <b>World Wide (WW model)</b> Downlink: Cat 12: 600 Mbps Cat 9: 450 Mbps Uplink: Cat 13: 150 Mbps		Protocol Gateway	Modbus on serial ports
			Management	SNMP*v1, v2c, v3 / Web/Telnet/CLI
			Environmental Monitoring	System status for input voltage, current , ambient temperature to be shown in GUI and sent alerting if any abnormal status
			Graphic signal display	Graphic LTE signal strength
			Timer	Built-in Real Time Clock to keep track of time always(RTC)
			Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
			SNMP trap	Device cold / warm start Port link up / link down DI/DO high / low
			Remote Web control	To reboot router by WebUI
			Maintenance	Firmware upgradeable through TFTP/HTTP
			Configuration backup & restore	Supports text configuration file for system quick installation USB port to upload/download configuration by USB dongle
<b>Software</b>			<b>Physical Ports &amp; System</b>	
IPv6/4	Present		Connectors	10/100/1000T: 6x ports RJ 45 (incl 4 PoE ports) USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 DB9 SIM card slots : 4(2L) or 2(1L) 2L model SMA connector for LTE: 4 (female) SMA connector for GPS: 2 (female) 1L model SMA connector for LTE: 2 (female) SMA connector for GPS: 1 (female) Power & P-Fail connector: 1 x 6-pole terminal block DIDO : 1 x 5-pole terminal block
VPN	Multi-site VPN, Open VPN, PPTP**, L2TP over IPSec, IPSec, L2 over GRE, IPGRE and NAT		Serial Baud Rate	1000Kbps for RS232 ; 12Mbps for RS422/RS485
Firewall	DDoS, IP address filter / Mac address filter / TCP/UDP port number		Serial Data Bits	5, 6, 7, 8
Load Balancing	8 schemes for multiple WAN(client mode)		Serial Parity	odd, even, none, mark, space
<b>Basic Package</b>			Serial Stop Bits	1, 1.5, 2
Fixed	Manually route by traffic type through fixed WAN link.		RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.		RS-422	Tx+, Tx-, Rx+, Rx-, GND
Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.		RS-485 (2-wire)	Data+, Data-, GND
Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights		Isolation protection	RS422/RS485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO 3KV isolation Input power 1.5KVA isolation
Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.		EMMC Storage**	8/16/32 GB
<b>Full Package** incl. Basic package</b>			DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.		<b>LED Indicators</b>	
Smallest load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream,		Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Ring Master(Green), Storage(Green), Serial1/Serial2(Green) ,Ready(Green)
			10/100/1000Base-T(X) port indicator	Link/Activity (Green), Speed (1000T: Yellow; 10/100TX: off), PoE (Green)
			SIM	Green for Link/Act
			GPS	Green for Link/Act
			Fault	Red: Ethernet link down or power down
			<b>Fault contact</b>	

Relay	Relay output to carry capacity of 1A at 24VDC		
<b>Power</b>			
Input power	Dual DC input, 9~56VDC (24V model)		IEC 61000-4-3 (RS), IEC 61000-4-4 (EFT), IEC 61000-4-5 (Surge), IEC 61000-4-6 (CS), IEC 61000-4-8 (PFMF)
PoE Budget	80W @12V /80W @24V&48V		
Power consumption (Typ.)	30.5 Watts		
<b>Physical Characteristic</b>			
Enclosure	IP 30 Metal case	Radio Frequency	EN 301 489-1, EN 301 489-17, EN 301 489-19, EN 301 489-52 EN 301 908-1**, EN 303 413, EN 62311
Dimension	74 (W) x 142 (D) x 152 (H) mm	Vehicle certificate	E13** ITxPT compliant**
Weight	900g	MTBF	NA
<b>Environmental</b>		Warranty	5 years
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)		
Operating Temperature	-40°C ~ 65°C (-40°F ~ 149°F)		
Operating Humidity	5% to 95% Non-condensing		
<b>Regulatory approvals</b>			
Safety	EN 62368*		
EMC	FCC Part 15B Class A, EN 55032: 2015, EN 55024: 2010 IEC 61000-6-2, IEC 61000-6-4		
EMS	IEC 61000-4-2 (ESD),		

\*Future Release

\*\*Optional

\*\*Standard test of the following bands are not listed in EN 301 908-1 report:  
(APAC not listed bands) LTE = B5, B18, B19, B21, B39, B41  
WCDMA = B5, B6, B9, B19;

(EUNA not listed bands) LTE = B2, B4, B5, B12, B13, B25, B26, B29, B30, B41  
WCDMA = B2, B4, B5;

(WW not listed bands) LTE = B2, B4, B5, B9, B12, B13, B18, B19, B26, B29, B30, B32,  
B41, B42, B43, B46, B48, B66

WCDMA = B2, B3, B4, B5, B6, B9, B19

## ORDERING INFORMATION

- **IPMR-3006-2L-2S-24V-EUNA.....P/N: 8624-001**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/ 2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2S-24V-APAC.....P/N: 8624-002**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/ 2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2S-24V-WW.....P/N: 8624-003**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/ 2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; worldwide band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2SA-24V-EUNA.....P/N: 8624-0011**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/2 RS422 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2SA-24V-APAC.....P/N: 8624-0021**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/2 RS422 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2SA-24V-WW.....P/N: 8624-0031**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/2 RS422 serial ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2SB-24V-EUNA.....P/N: 8624-0012**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/2 RS485 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2SB-24V-APAC.....P/N: 8624-0022**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/2 RS485 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual input 9~56VDC; -40~65C
- **IPMR-3006-2L-2SB-24V-WW.....P/N: 8624-0032**  
Industrial Dual LTE (Quad SIM) Load Balancing VPN Mobile Router w/2 RS485 serial ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2S-24V-EUNA.....P/N: 8624-004**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2S-24V-APAC.....P/N: 8624-005**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2S-24V-WW.....P/N: 8624-006**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2SA-24V-EUNA.....P/N: 8624-0051**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS422 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2SA-24V-APAC.....P/N: 8624-0061**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS422 serial ports and 6 Giga Port Switch incl.4 PoE;

- APAC band; dual input 9~56VDC; -40~65C

■ **IPMR-3006-1L-2SA-24V-WW.....P/N: 8624-0071**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS422 serial ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2SB-24V-EUNA.....P/N: 8624-0052**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS485 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2SB-24V-APAC.....P/N: 8624-0062**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS485 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual input 9~56VDC; -40~65C
- **IPMR-3006-1L-2SB-24V-WW.....P/N: 8624-0072**  
Industrial One LTE (Dual SIM) Load Balancing VPN Mobile Router w/2 RS485 serial ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual input 9~56VDC; -40~65C

**Software License**

- **LOAD BALANCING Full Package.....P/N: 9000-102**

**EMMC Flash Storage**

- **8G.....P/N:8850-113**
- **16G.....P/N:8850-114**
- **32G.....P/N:8850-115**

**OPTIONAL ACCESSORIES**

**Management System**

- **InstaAir.....P/N: 9000-121**  
Cloud Based Fleet Management System for Routers

**Multifunction Antenna**

- **ANT11000091** 5-in-1 omnidirectional antenna – 2G/3G/4G (698-960/1710~2170/2300~2700MHz) MIMO x2 + Wi-Fi 2.4/5GHz MIMO x2 + GPS/GLONASS/GALILEO (1575.42/1602MHz) x1, 3dBi, cable length: 3M



- **ANT11000092** 6-in-1 omnidirectional antenna – 2G/3G/4G (698-960/1710~2170/2300~2700MHz) MIMO x2 + Wi-Fi 2.4/5GHz MIMO x1 + GPS/GLONASS/GALILEO/BeiDou (1561/1575.42/1602MHz) x1 + AM/FM x1 + DSRC x1, 6dBi, IP67, cable length: 30cm



**GPS Antenna**

- **ANT12000001** SMA GPS antenna, 28dB, 300m



**Cellular Antenna**

- **ANT11000041** 2G/3G/4G dipole antenna, 791-960/1710~2170/2500~2700MHz, 3dBi, SMA plug, EU



- **ANT11000042** 2G/3G/4G dipole antenna, 704-960/1710~2170MHz, 3dBi, SMA plug, US



■ **ANT11000044**

2G/3G/4G dipole antenna, 704-960/1710-2690MHz, 1.6dBi, SMA plug, EU



■ **ANT11000045**

2G/3G/4G dipole antenna, 698-960/1710-2690MHZ, 3dBi, SMA plug, US



**Antenna Base**

■ **ADA11000053**

Magnetic antenna base for 3G/4G, RP SMA Jack Base, Length : 1M



**Lantech Communications Global Inc.**

[www.lantechcom.tw](http://www.lantechcom.tw)  
[info@lantechcom.tw](mailto:info@lantechcom.tw)

© 2020 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global, Inc.  
Lantech may make changes to specification and product descriptions at any time without notice.