

IWMR-3204DF

Industrial Multifunction VPN Router w/up to 2x WiFi 11ac + up to 2 LTE 4G + 2 serial ports + 4 GigaT + 2 Dual Speed SFP w/ Load Balancing, VPN, Protocol Gateway, Storage; 24V/HV input**

- Up to 2 concurrent WIFI 11ac and redundancy(1L-2AC model)
- Up to 2 concurrent mobility for 3G/4G LTE Link&GPS (2L-1AC model/4 SIMs)
- Support LTE Cat 6 (APAC & EUNA models) or Cat 12/9/13 (WW model)
- Built-in 4 GigaT + 2 Dual Speed SFP Ethernet managed switch
- Built-in Managed Switch functions cover port management, QOS, VLAN, multicast, redundant ring and security function
- Dual radio for 802.11ac/a/b/g/n with concurrent 5GHz & 5GHz bands up to 2.6Gbps Wi-Fi bandwidth(2AC model)
- WIFI radio for 802.11ac/a/b/g/n with 5GHz or 2.4GHz;
- Support WIFI 802.11e traffic prioritization and WMM
- MIMO technology 3T3R up to 6 antenna(2AC); SMA type external antennas
- Air-teaming** for WIFI high-sustainability and aggregated bandwidth
- Advanced wireless security WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)
- VPN router for Multi-site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE , IPGRE
- Load Balancing built-in 5 mechanism
- Support NAT and Firewall
- Support roaming with 802.11k & v
- Supports AP/ Bridge/Client/MESH modes
- Support 802.11s Wireless Mesh Network
- Support Modbus gateway on serial ports
- Support 2 RS422/RS485 ports with 2.5KV isolation or 2x RS232 ports
- Optional EMMC Flash storage on-board**
- Dual DC Input voltage 9~56VDC (24V model); Single input power 90~305VAC/120~430VDC (HV model)
- Vehicle E-marking** certificate
- ITxPT compliant w/ ignition function**
- Environmental monitoring for router inside info with voltage, current, temperature and WIFI & LTE graphic signal strength
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware*



OVERVIEW

Lantech IWMR-3204DF series is a next generation industrial multi-function VPN router w/up to 2x 802.11ac WiFi + up to 2x LTE modem + 4 GigaT + 2 Dual Speed SFP managed switch + 2 serial ports that supports advanced function of VPN, Load-Balancing(Basic & Full package), EMMC Flash Storage**, Protocol gateway(Modbus), WiFi roaming and LTE quad SIM fail-over for industrial applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, IWMR-3204DF can allow auto-swap, failover & fallback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by Load Balancing with 8 schemes between multiple WANS.

With one mobile LTE module (1L model), 2 SIM card slots, IWMR-3204DF provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

Support AP/Bridge/Client mode, Mesh w/802.11k, v roaming

IWMR-3204DF supports AP/Bridge/Client mode for different applications. Client mode supports PMK** Caching and pre-authentication.

It also supports 802.11k, v roaming to allow encryption keys to be stored on all of the APs in a network.

Built-in Wireless Mesh network (WMN)

IWMR-3204DF supports Mesh network composed of different nodes. The set of SSIDs allow the wireless client to roam freely without the need for complicated account management. With Mesh protocol, it can provide a reliable, scalable, stable and seamless network topology.

IEEE 802.11ac dual band radio up to 2.6Gbps bandwidth

With IEEE 802.11ac capability, IWMR-3204DF can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6Gbps bandwidth (1.3Gbps per 1AC). It is also compatible with 802.11g/n that can work with 2.4GHz for longer range transmission.

The WiFi 11ac supports AP/Bridge/AP Client modes can be diverse for most of wireless application. Working with load-Balancing "Priority" mode, the AP client can enable router to transmit on WiFi with first priority.

Air-teaming for wireless high-sustainability and aggregated**

The innovative Air-teaming** can combines multiple wireless links to achieve both high-sustainability and aggregated bandwidth. High sustainability can keep the network traffic alive even one link is down or severely interfered. Aggregated bandwidth can bind two link channels to provide the maximum throughput.

MIMO technology with 3T3R and SMA type connectors

Lantech IWMR-3204DF series adapts MIMO technology with smart antenna transmission and reception for 3T3R. With six external detachable omni connectors and optional antennas, IWMR-3204DF can have better Wi-Fi & LTE/GPS coverage.

Wireless WMM QoS

IWMR-3204DF supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (WIFI multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP,

WPAWPA2 PSK (TKIP, AES), 802.1x ensures the best security and active defense against security threats. Lantech IWMR-3204DF support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 8 mechanisms for multi-WANs (premium license)

IWMR-3204DF supports Load Balancing for LTE/WAN connections. There are eight schemes for Load Balancing function:

Pack	Algorithm	Description
Basic Package	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package** (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link, that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

2 port serial connection, Modbus gateway

It builds in 2 port serial connection for RS232, RS422, RS485 in which RS422/RS485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

VPN and firewall

Besides traditional VPN peer to peer tunneling, IWMR-3204DF support latest Multi-Site VPN function that is an efficient way for

Mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, OpenVPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE, IPGRE, and NAT for various VPN applications.

The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP / UDP port number.

DIDO for alarm & email notice; Event log; Remote Web control

2 sets of DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IWMR-3204DF will immediately send email and trap.

When the router is at remote area with limited access, Web control can help to get router status or remotely reboot by Web.

24V/HV input voltage selection: dual 9V-56VDC (24V model) or single 90~305VAC/120~430VDC (HV model)

The IWMR-3204DF is able to work from 9VDC to 56VDC (24V model) Or with single high power supply at 90~305VAC / 120~430VDC (HV model).

Environmental monitoring for inside router info& alerting; Graphic WIFI & LTE signal strength

The built-in environmental monitoring can detect router ambient temperature, voltage, current where can send the syslog and email** when abnormal.

Ignition Sensing*

Ignition sense allows you to delay power off the router with a

designated time delay.

Built-in Managed Switch Function

Managed switch function is built-in and provides various L2+ functions for network access deployment. It delivers port management, VLAN, QoS, multicast, redundant ring and security functions.

USB port for back up, restore configuration and upgrade firmware; Dual image firmware*

The built-in USB port can upload/download the configuration through USB dongle for router replacement

It supports dual-image firmware* to choose which one to start.

Optional EMMC Flash storage**

The optional EMMC flash storage on router can offer 8G/16G/32G capacity.

Editable login page of captive portal

The IWMR-3204DF supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized industrial design and FCC, CE & E-marking certificate**

The IWMR-3204DF is designed to meet with industrial network environment. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards.

With CE & FCC radio certification for WIFI and LTE and E-marking** certificate, the IWMR-3204DF is best for outdoor community, vehicle, process control automation etc application. For more usage flexibilities, IWMR-3204DF supports wide operating temperature from -40°C to 65°C.

FEATURES & BENEFITS

- **High Speed Air Connectivity: WLAN interface support up to 2.6Gbps link speed(2AC) or 1.3Gbps (1AC)**
- **Built-in 4 GigaT + 2 Dual Speed SFP managed Ethernet switch**
- **EMMC-FLASH storage** 8/16/32G**
- **Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n**
- **Support AP/Bridge/Client/MESH mode**
- **Support roaming with 802.11k & v**
- **Support 802.11s Wireless Mesh Network**
- **Support 2.4Ghz operating within the following frequency bands:**
 - **2.412~2.472 GHz**
- **Support 5Ghz operating within the following frequency bands:**
 - **5.180GHz~5.825GHz**
- **MIMO smart antenna technology with 3T3R**
- **6 SMA type connectors for WiFi & LTE, GPS**
- **Optional Air-teaming** protection(2AC)**
 - **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
 - **Aggregated bandwidth :** The bandwidth of two link members can be aggregated to provide maximum throughput
- **Output power : <24dBm**
- **Transmit power adjustment**
- **VAP (virtual access point) support up to 16 SSIDs**
- **Operation modes : AP/ Bridge / Client**
- **IEEE 802.11h DFS and automatic TPC**
- **Traffic control for each SSID****
- **Band preference for same SSID services on dual band****
- **Rate selection to disable low data rate access****
- **Highly Security Capability: WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)**

- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6 & IPv4 protocol
- Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported
- Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.
- Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.
- Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization
- Support Multi-Site VPN for Mesh tunneling as well as Open VPN, L2TP over IPsec, IPsec, PPTP**, L2 over GRE, IPGRE and NAT for secured network connection
- The built-in Layer-4 firewall includes DDoS, IP address filter / Mac address filter / TCP/UDP port number
- NAT/DMZ/Port Forwarding
- Support SNMPv1/v2c/v3
- Dual concurrent LTE 4G/3G design (2L model) for auto-swap/failover/failback between multiple ISPs for continuous service (four SIM card slots)
- One LTE 4G/3G w/ 2 SIM card design (1L model) for mobile redundancy
- GPS/ GLONASS (support by LTE module) connection
- Load Balancing supports 8 mechanism between multiple WANs


Pack	Algorithm	Description
Basic Package	Fixed	Manually route by traffic type through fixed WAN link.
	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.

Full Package** (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link, that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.


- Built-in 2 x serial ports(RS232/RS422/RS485)
- Serial port with 2.5KV isolation on RS422/RS485
- Supports 2DI / 2DO (Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP for serial ports
- Event alerting by Syslog, SNMP Trap, Email, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web control to get status or re-boot by Web
- Graphic LTE & WIFI signal strength
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal
- Dual image firmware* to choose which to start
- Firmware upgradeable through TFTP/HTTP
- Configuration backup and restoration
 - Supports text configuration file for system quick installation
 - USB port to upload/download configuration by USB dongle
- Reset button for factory default mode
- Support editable captive portal login page
- DIN-Rail and Wall-mount** installation
- ITxPT compliant w/ ignition function**
- Operation temperature -40~65C

DIMENSIONS (unit=mm)

24V model

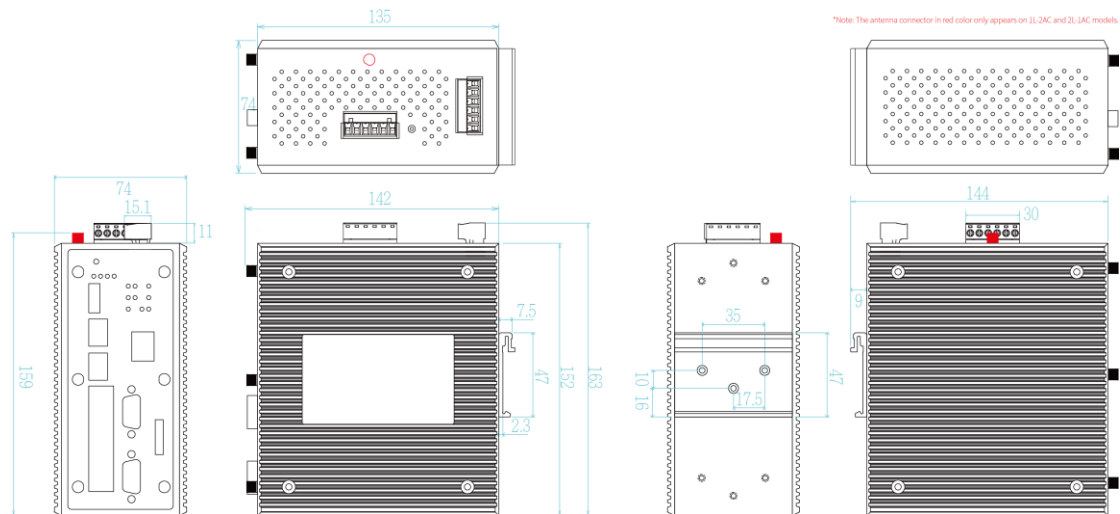

HV model

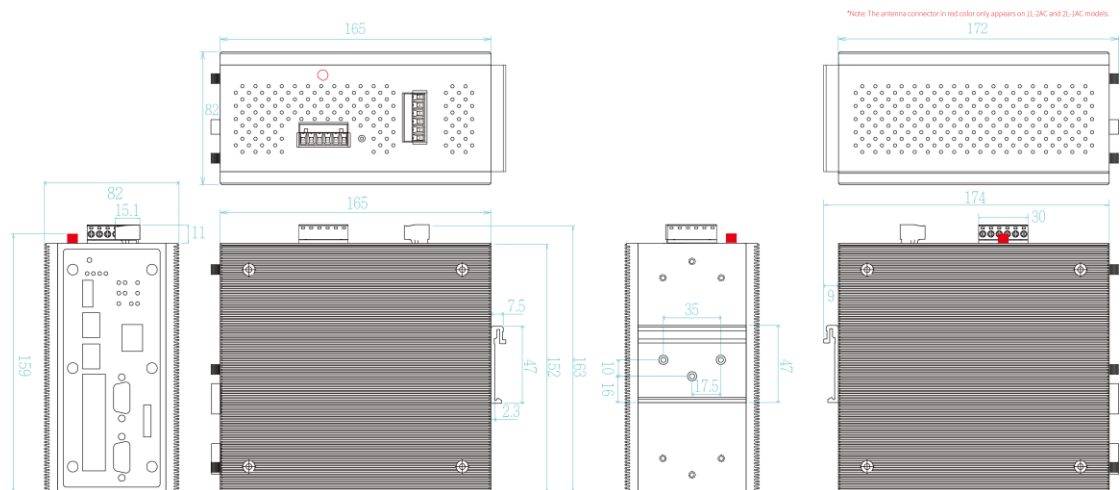

SPECIFICATION

WLAN Interface		
Radio Frequency Type	DSSS, OFDM	IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE802.11n: up to 450Mbps
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz	IEEE 802.11b/g/n(2.4Gbps) Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0~MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps	
Modulation	802.11b: DSSS 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	IEEE 802.11a/n/ac(5Gbps) Output Power Tx +/- 2dB(per chain) 20dBm @ 6~24Mbps 16dBm @ 36~54Mbps
Operating Frequency	IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz	
Transmission Rate	IEEE802.11ac: up to 1300Mbps IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps	

	19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80) 13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Basic Package	
		Fixed	Manually route by traffic type through fixed WAN link.
		Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.
		Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
		Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights
		Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
Full Package** incl. basic package			
Encryption Security	WEP : (64-bit ,128-bit key supported) WPA WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP-TLS,EAP-TTLS, and PEAP	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
Wireless Security	SSID broadcast disable	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
Cellular Interface			
Location Solutions	GPS, Glonass (EUNA/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)	Fastest*	Routes connections through the WAN link with lowest latency time.
Band Options	Asia-Pacific (APAC model) LTE = B1, B3, B5✖, B7, B8, B18✖, B19✖, B21✖, B28, B38 (TDD), B39✖ (TDD), B40 (TDD), B41✖ (TDD) DC-HSPA+/ HSPA+/ HSPA/ UMTS = B1, B5✖, B6✖, B8, B9✖, B19✖ Europe & North America (EUNA model) LTE = B1, B2✖, B3, B4✖, B5✖, B7, B8, B12✖, B13✖, B20, B25✖, B26✖, B29✖, B30✖, B41✖ (TDD) DC-HSPA+/ HSPA+/ HSPA/ UMTS = B1, B2✖, B3, B4✖, B5✖, B8 World Wide (WW model) LTE = B1, B2✖, B3, B4✖, B5✖, B7, B8, B9✖, B12✖, B13✖, B18✖, B19✖, B20, B26✖, B28, B29✖, B30✖, B32✖, B41✖ (TDD), B42✖ (TDD), B43✖ (TDD), B46✖ (TDD), B48✖ (TDD), B66✖ WCDMA = B1, B2✖, B3✖, B4✖, B5✖, B6✖, B8, B9✖, B19✖	Security	WEP64/128bits/ WPA/ WPA-PSK (TKIP,AES)/ WPA2/ WPA2-PSK (TKIP,AES)/SSH/SSL/HTTPS
		Roaming	802.11k & v
		MESH	Support 802.11s Wireless Mesh Network
		Authentication	Radius Authentication, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported
		SSID	16 sets
		Login Security	Supports IEEE802.1x Authentication/RADIUS
		Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)
		Protocol	PPPoE Client, DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DDoS; IP address filter / Mac address filter / TCP/UDP port name),VRRP**, DDNS*
		Protocol Gateway	Modbus on serial ports
		Management	SNMP*v1,v2c,v3/ Web/Telnet/CLI
		Client mode	PMK** Caching and pre-authentication.
		Environmental Monitoring	System status for input voltage, current , ambient temperature to be shown in GUI and sent alerting if any abnormal status
		Graphic signal display	Graphic WIFI & LTE signal strength
		Timer	Built-in Real Time Clock to keep track of time always(RTC)
		Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
		SNMP trap	Device cold / warm start Port link up / link down DI/DO high / low
		Remote Web control	To reboot router by WebUI
		Captive portal	Editable captive portal login page
		Maintenance	Firmware upgradeable through TFTP/HTTP
		Configuration backup & restore	Supports text configuration file for system quick installation USB port to upload/download configuration by USB dongle
Physical Ports & System			
		Connectors	10/100/1000T: 4x ports RJ 45 + 2 Dual Speed SFP USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 DB9 SIM card slots : 4(2L) or 2(1L) 2L-1AC model SMA connector for LTE: 4 (female) SMA connector for GPS: 1 (female) RP-SMA connector for Wi-Fi: 2 (female) 1L-2AC model SMA connector for LTE: 2 (female) SMA connector for GPS: 1 (female) RP-SMA connector for Wi-Fi: 4 (female)

	1L-1AC model SMA connector for LTE: 2 (female) SMA connector for GPS: 1 (female) RP-SMA connector for Wi-Fi: 3 (female) Power & P-Fail connector: 1 x 6-pole terminal block DIDO : 1 x 5-pole terminal block	82 (W) x 172 (D) x 159 (H) mm (HV, 1L-2AC / 2L-1AC model)	
Serial Baud Rate	1000Kbps for RS232 ; 12Mbps for RS422/RS485	Weight	900g
Serial Data Bits	5, 6, 7, 8	Environmental	
Serial Parity	odd, even, none, mark, space	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Serial Stop Bits	1, 1.5, 2	Operating Temperature	-40°C ~ 65°C (-40°F ~ 149°F)
RS-232	TxD, Rx D, RTS, CTS, DTR, DSR, DCD, GND	Operating Humidity	5% to 95% Non-condensing
RS-422	Tx+, Tx-, Rx+, Rx-, GND	Regulatory approvals	
RS-485 (2-wire)	Data+, Data-, GND	Safety	EN 62368*
Isolation protection	RS422/RS485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO 3KV isolation Input power 1.5KVA isolation	EMC	FCC Part 15B Class A, EN 55032: 2015, EN 55024: 2010 IEC 61000-6-2, IEC 61000-6-4
EMMC Storage**	8/16/32 GB	EMS	IEC 61000-4-2 (ESD), IEC 61000-4-3 (RS), IEC 61000-4-4 (EFT), IEC 61000-4-5 (Surge), IEC 61000-4-6 (CS), IEC 61000-4-8 (PFMF)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA	Radio Frequency	EN 301 489-1, EN 301 489-17, EN 301 489-19, EN 301 489-52 EN 302 502, EN 301 893, EN 300 328, EN 301 908-1※, EN 303 413, EN 62311
LED Indicators		Vehicle certificate	E13** ITxPT compliant**
Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Ring Master(Green), Storage(Green), Serial1/Serial2(Green) ,Ready(Green)	MTBF	564,950hrs (IEC-62380 standards)
10/100/1000Base-T(X) port indicator	Link/Activity (Green), Speed (1000T: Yellow; 10/100TX: off)	Warranty	5 years
SIM	Green for Link/Act	*Future Release	
GPS	Green for Link/Act	**Optional	
Fault	Red: Ethernet link down or power down	※Standard test of the following bands are not listed in EN 301 908-1 report: (APAC not listed bands) LTE = B5, B18, B19, B21, B39, B41 WCDMA = B5, B6, B9, B19; (EUNA not listed bands) LTE = B2, B4, B5, B12, B13, B25, B26, B29, B30, B41 WCDMA = B2, B4, B5; (WW not listed bands) LTE = B2, B4, B5, B9, B12, B13, B18, B19, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66 WCDMA = B2, B3, B4, B5, B6, B9, B19	
Fault contact			
Relay	Relay output to carry capacity of 1A at 24VDC		
Power			
Input power	Dual DC input, 9~56VDC (24V model) Single HV input, 90~305VAC/120~430VDC (HV model)		
Power consumption (Typ.)	30.5 Watts		
Physical Characteristic			
Enclosure	IP 30 Metal case		
Dimension	74 (W) x 142 (D) x 152 (H) mm (24V, 1L-1AC model)		
	74 (W) x 142 (D) x 159 (H) mm (24V, 1L-2AC / 2L-1AC model)		
	82 (W) x 172 (D) x 152 (H) mm (HV, 1L-1AC model)		

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-92dBm	±2dB
	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-77dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 8	13dBm	18dBm	±2dB	-71dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
5GHz 802.11ac VHT80	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
5GHz 802.11ac VHT80	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB

ORDERING INFORMATION

For -40~65C operational temperature model

- **IWMR-3204DF-2L-1AC-2S-24V-EUNA.....P/N: 8686-001**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2S-24V-WW.....P/N: 8686-002**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2S-24V-APAC.....P/N: 8686-003**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SA-24V-EUNA.....P/N: 8686-0011**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SA-24V-APAC.....P/N: 8686-0031**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SA-24V-WW.....P/N: 8686-0021**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SB-24V-EUNA.....P/N: 8686-0012**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SB-24V-APAC.....P/N: 8686-0032**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SB-24V-WW.....P/N: 8686-0022**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2S-24V-EUNA.....P/N: 8686-004**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2S-24V-APAC.....P/N: 8686-005**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2S-24V-WW.....P/N: 8686-006**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SA-24V-EUNA.....P/N: 8686-0041**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SA-24V-APAC.....P/N: 8686-0051**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SA-24V-WW.....P/N: 8686-0061**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SB-24V-EUNA.....P/N: 8686-0042**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SB-24V-APAC.....P/N: 8686-0052**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SB-24V-WW.....P/N: 8686-0062**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2S-24V-EUNA.....P/N: 8686-007**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2S-24V-APAC.....P/N: 8686-008**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2S-24V-WW.....P/N: 8686-009**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; dual input 9V~56VDC; -40~65C

- **IWMR-3204DF-1L-2AC-2SA-24V-EUNA.....P/N: 8686-0071**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SA-24V-APAC.....P/N: 8686-0081**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SA-24V-WW.....P/N: 8686-0091**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SB-24V-EUNA.....P/N: 8686-0072**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SB-24V-APAC.....P/N: 8686-0082**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; APAC band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SB-24V-WW.....P/N: 8686-0092**
Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; dual input 9V~56VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2S-HV-EUNA.....P/N: 8686-010**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2S-HV-WW.....P/N: 8686-011**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2S-HV-APAC..... P/N: 8686-012**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SA-HV-EUNA.....P/N: 8686-0101**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SA-HV-APAC.....P/N: 8686-0121**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing AP VPN Mobile Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SA-HV-WW.....P/N: 8686-0111**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SB-HV-EUNA.....P/N: 8686-0102**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SB-HV-APAC.....P/N: 8686-0122**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing AP VPN Mobile Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-2L-1AC-2SB-HV-WW.....P/N: 8686-0112**
Industrial Dual LTE (Quad SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2S-HV-EUNA.....P/N: 8686-013**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2S-HV-APAC.....P/N: 8686-014**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2S-HV-WW.....P/N: 8686-015**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SA-HV-EUNA.....P/N: 8686-0131**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SA-HV-APAC.....P/N: 8686-0141**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SA-HV-WW.....P/N: 8686-0151**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SB-HV-EUNA.....P/N: 8686-0132**
Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4

- GigaT + 2 Dual Speed SFP Managed Switch; EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
 ■ **IWMR-3204DF-1L-1AC-2SB-HV-APAC.....P/N: 8686-0142**
 Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-1AC-2SB-HV-WW.....P/N: 8686-0152**
 Industrial One LTE (Dual SIM) One WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2S-HV-EUNA.....P/N: 8686-016**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2S-HV-APAC.....P/N: 8686-017**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2S-HV-WW.....P/N: 8686-018**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/ 2 RS232 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SA-HV-EUNA.....P/N: 8686-0161**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SA-HV-APAC.....P/N: 8686-0171**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SA-HV-WW.....P/N: 8686-0181**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS422 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SB-HV-EUNA.....P/N: 8686-0162**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed switch EU and US band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SB-HV-APAC.....P/N: 8686-0172**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; APAC band; single high power 90~305VAC / 120~430VDC; -40~65C
- **IWMR-3204DF-1L-2AC-2SB-HV-WW.....P/N: 8686-0182**
 Industrial One LTE (Dual SIM) Two WIFI 11ac/a/b/g/n Load Balancing Multifunction Router w/2 RS485 serial ports and 4 GigaT + 2 Dual Speed SFP Managed Switch ; Worldwide band; single high power 90~305VAC / 120~430VDC; -40~65C

EMMC Flash Storage

- **8G.....P/N: 8850-113**
- **16G.....P/N: 8850-114**
- **32G.....P/N: 8850-115**

Software License

- **LOAD BALANCING Full Package.....P/N: 9000-102**

OPTIONAL ACCESSORIES

DIN Rail Power

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Mini GBIC (SFP)

- | | |
|--|---|
| ■ 8330-162X MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ 8330-189 LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ 8330-163X MINI GBIC 1000SX2 (LC/2km) Transceiver | ■ 8330-186 LTSFP-1000BX-20KM Transceiver (WDM 1310) |
| ■ 8330-165X MINI GBIC 1000LX (LC/10km) Transceiver | ■ 8330-187 LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/40km) Transceiver | ■ 8330-180 LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000XD (LC/50km) Transceiver | ■ 8330-182 LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/60km) Transceiver | ■ 8330-181 LTSFP-1000BX-60KM Transceiver (WDM 1310) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/80km) Transceiver | ■ 8330-183 LTSFP-1000BX-60KM Transceiver (WDM 1550) |
| ■ 8330-170 MINI GBIC 1000EZ (120km) Transceiver | ■ 8330-184 LTSFP-1000BX-80KM Transceiver (WDM 1490) |
| ■ 8330-168 MINI GBIC 1000T (100m) Transceiver | ■ 8330-185 LTSFP-1000BX-80KM Transceiver (WDM 1550) |
| ■ 8330-188 LTSFP-1000BX-10KM Transceiver (WDM 1310) | ■ 8330-262 MINI GBIC 2.5G 850nm VCSEL (LC/0.3km) Transceiver |

■ **8330-263** MINI GBIC 2.5G 1310nm FP (LC/2km) Transceiver■ **8330-265** MINI GBIC 2.5G 1310nm DFB (LC/15km) Transceiver

All SFP ended with D are with Diagnostic function

Management System

- **InstaAir.....P/N: 9000-121**
 Cloud Based Fleet Management System for Routers

Multifunction Antenna

- **ANT11000091** 5-in-1 omnidirectional antenna – 2G/3G/4G (698-960/1710~2170/2300~2700MHz) MIMO x2 + Wi-Fi 2.4/5GHz MIMO x2 + GPS/GLONASS/GALILEO (1575.42/1602MHz) x1, 3dBi, IP67, cable length: 3M



- **ANT11000092** 6-in-1 omnidirectional antenna – 2G/3G/4G (698-960/1710~2170/2300~2700MHz) MIMO x2 + Wi-Fi 2.4/5GHz MIMO x1 + GPS/GLONASS/GALILEO/BeiDou (1561/1575.42/1602MHz) x1 + AM/FM x1 + DSRC x1, 6dBi, IP67, cable length: 30cm

**GPS Antenna**

- **ANT12000001** SMA GPS antenna, 28dB, 300m

**Cellular Antenna**

- **ANT11000041** 2G/3G/4G dipole antenna, 791-960/1710~2170/2500~2700MHz, 3dBi, SMA plug, EU



- **ANT11000042** 2G/3G/4G dipole antenna, 704-960/1710~2170MHz, 3dBi, SMA plug, US



- **ANT11000044** 2G/3G/4G dipole antenna, 704-960/1710~2690MHz, 1.6dBi, SMA plug, EU



- **ANT11000045** 2G/3G/4G dipole antenna, 698-960/1710~2690MHz, 3dBi, SMA plug, US

**Wi-Fi Antenna**

- **ANT11000051** 2.4/5GHz SMA dipole Wi-Fi antenna, 3dBi (2.4GHz), 4dBi (5GHz)



■ **ANT11000055**

2.4/5GHz SMA dipole Wi-Fi antenna, 6dBi (2.4GHz), 4dBi (5GHz)



■ **ANT11000090**

2.4/5GHz omnidirectional Wi-Fi antenna, 802.11ac 3x3 MIMO, 5dBi, IP67, cable length: 3M



Antenna Base

■ **ADA11000052**

Magnetic antenna base for Wi-Fi, RP SMA Jack Base, Length : 1M



■ **ADA11000053**

Magnetic antenna base for 3G/4G, RP SMA Jack Base, Length : 1M



Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2020 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.