

IES-2208CA

8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo

Industrial Managed Ethernet Switch

- UL Class I Division II for Group A,B,C and D certified (-C1D2/ATEX model)
- ATEX Directive 94/9/EC certified (-C1D2/ATEX model)
- Pro-Ring2se for self-heal ring<20ms
- Support Modbus/TCP** for device management and monitoring
- Support Advanced SNMP including QoS, IGMP query & source only, DDM***, CPU load monitoring
- Factory Default Button to restore setting
- DNV Type Approved* for Ships, Craft and Off-shore Platforms



Non-DNV model















DNV model











OVERVIEW

The Lantech IES-2208CA is an 8-port 10/100BaseTX + 2-port 10/100/1000T/Dual Speed SFP Combo industrial Ethernet switch with Pro-Ring2se self-recovery scheme in 20ms. The SFP connection is suitable with 100M or 1000M Dual Speed. The advanced SNMP management features include QoS for 4 queues, 802.1q VLAN, IGMP snooping, query and source only for multicast IP surveillance, DDM*** as well as Web Ping, CPU load monitoring, SNTP and SMTP etc.

Modbus/TCP** protocol is supported. It's used for communications over TCP/IP networks for factory automation.

The Pro-Ring2se self-recovery scheme can recover Ring network in less than 20ms with single ring up to 50 switches with one step setup. Lantech IES-2208CA builds all the important management features required in large network like DHCP Client/Server, 802.1X authentication, IGMP Query / Snooping, and advanced QoS. The exclusive source only function is good for reverse multicast flow which can automatically select the query (router port) in a ring for IP surveillance application. It also supports Ping commands via Web to detect whether a specific device is still connected for easy trouble-shooting.

The IES-2208CA has the relay contact that is able to connect

with alarm system and send Email and SNMP trap alert in case of power or port failure. It also has the built-in factory reset button can restore all setting back to factory default.

The IES-2208CA is designed to meet with critical network environment with IP 30 enclosure and test under extensive Industrial EMI and Safety standards. With UL Class I Division II /ATEX Directive 94/9/EC approval, the IES-2208CA-C1D2/ATEX can be implemented in hazardous or explosive condition without accelerating the damage. It's the best choice for inflammable environment where the liquid, gas and vapor etc might present the hazardous condition which generally to be find in mining, oil & gas, chemical, processing automation areas. It's also suitable for surveillance, factory automation, transportation, telecom / ISP outside terminal, heavy industrial factory and other factory assembly lines.

The -E / -C1D2/ATEX / -DNV model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

The Lantech IES-2208CA-DNV meets with the most critical test criteria in DNV Type* test directives consisting of MED (Marine Equipment Directive), EMC (Electromagnetic Compatibility Directive) and LVD (Low Voltage Directive) in which vibration,



high voltage, compass safe distance, salt mist tests, humidity etc are conducted to ensure the switch sustaining the harsh on-

board environments often founded in Ships, Crafts and Offshore platforms.


FEATURES & BENEFITS

- Pro-Ring2se for self-recovery scheme in less than
 20ms for single-ring with one setup
- Support Modbus/TCP** for device management and monitoring
- SFP slot supports 100/1000 Dual Mode with DDM*** for SFP diagnostic and monitoring
- Back-plane (Switching Fabric): 5.6Gbps
- 1Mbits Packet Buffer / 8K MAC address table
- UL Class I Division II for Group A,B,C and D certified;
 ATEX Directive 94/9/EC certified (-C1D2/ATEX model)
- IP30 metal housing with DIN rail and Wall-mount** design
- Provides EFT protection ±2000 VDC for power line
- Supports ±6000 VDC for ESD protection
- Support CPU load monitoring and Web Ping to check if the connected device is alive
- IEEE 802.1d Spanning Tree & IEEE 802.1w RSTP
- IGMP with Snooping and Query mode for Multi Media Application
- IGMP source only for reverse multicast application
- Static Multicast Route for non-IGMP application
- Port Based VLAN, 802,1Q Tag VLAN
- Port Trunk with LACP
- Supports IEEE 802.1ab LLDP

- Supports IEEE 802.1p CoS, 4 priority queues per port
- Port base, Tag Base and Type of Service Priority
- Supports Ingress Packet Filter and Egress Rate Limit
- Supports Broadcast/Multicast Packet Filter Control
- Port Mirror: Monitor traffic in switched networks
 - · TX, RX, Both of TX and RX Packet
- System Log Server/Client
- SMTP e-mail Alert up to 6 emails
- Security
 - · Port Security: MAC address entries/Filter
 - IP Source Guard: IP address security management to prevent unauthorized intruder
 - · Login Security: IEEE802.1X/RADIUS;SSH*/SSL*
- SNMP Trans
 - · Device cold start, Power status, Authentication failure, Port Link up/Link down
- Relay Alarm Output System Events
- TFTP & Web Firmware Update & System Configure Restore/Backup;
- Factory reset bottom can restore all setting back to factory default
- DNV Type Approved* for Ships, Craft and Off-shore Platforms


DIMENSIONS (unit=mm)

Non-DNV model

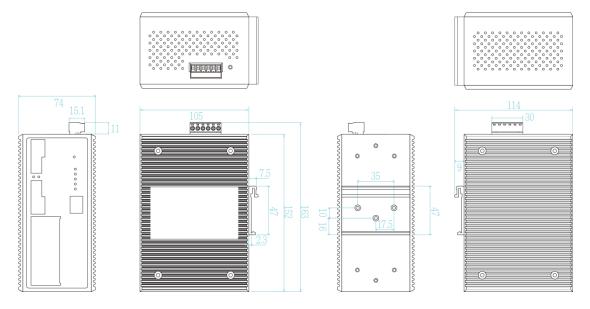



DNV model

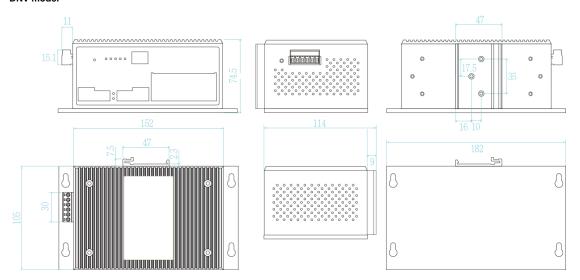

SPECIFICATION

| Hardware Specification | | | Single mode: 0 to 20 km/ 40 km/ 60 km/ 80 km, 1310 |
|------------------------|---|----------------------|---|
| IEEE Standards | IEEE802.3 10Base-T Ethernet | | nm (9/125 μm); 0 to 20 km/ 40 km/ 60 km/ 80 km, |
| | IEEE802.3u 100Base-TX | | 1550 nm (9/125 μm) |
| | IEEE802.3ab 1000Base-T | LED | Per unit: Power (Green), Power 1 (Green), Power 2 |
| | IEEE802.3z Gigabit fiber | | (Green), Fault (Yellow), Master (Green) |
| | IEEE802.3x Flow Control and Back Pressure | | 8 port 10/100: Link/Activity (Green), Full |
| | IEEE802.3ad Port trunk with LACP | | duplex/Collision (Yellow) |
| | IEEE802.3af Power over Ethernet | | Combo port: SFP LNK/ACT (Green), 1000T: |
| | IEEE802.1d Spanning Tree | | LNK/ACT(Green), 1000M (Yellow) |
| | IEEE802.1w Rapid Spanning Tree | | R.M. indicator (Green) |
| | IEEE802.1p Class of Service | Power Supply | 12V~48VDC(9.5V~60VDC);Dual power connector |
| | IEEE802.1Q VLAN Tag | | removable terminal block for master and slave power |
| | IEEE802.1x User Authentication (Radius) | Overload current | Present |
| | IEEE802.1ab LLDP | protection | |
| Switch Architecture | Back-plane (Switching Fabric): 5.6Gbps | Operating Humidity | 5% ~ 95% (Non-condensing) |
| Transfer Rate | 14,880pps for Ethernet port | Operating | Standard: -20°C~60°C / -4°F~140°F |
| | 148,800pps for Fast Ethernet port | Temperature | Wide Operating Temperature for -E model/ - |
| | 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port | | C1D2/ATEX model/ -DNV model: |
| Packet Buffer | 1Mbits | | -40°C~75°C / -40°F~167°F |
| MAC Address | 8K MAC address table | Storage | -40°C~85°C / -40°F~185°F |
| Connectors | 10/100TX: 8 x ports RJ-45 with Auto MDI/MDI-X | Temperature | |
| | function | Case Dimension | IP-30, |
| | 10/100/1000T/SFP Combo port: 2 x RJ-45 + 2 x | | 74(W) x 105 (D) x 152 (H) mm (non-DNV model) |
| | 100/1000 SFP socket with DDM | | |
| | RS-232 connector: RJ-45 type | | 74.5(W) x 105 (D) x 182 (H) mm (DNV model) |
| Network Cable | 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable | Weight | 850 g (non-DNV model) |
| | EIA/TIA-568 100-ohm (100m) | | 1000 g (DNV model) |
| | 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable | Fan Number | 0 |
| | EIA/TIA-568 100-ohm (100m) | Installation | DIN Rail and Wall Mount** Design |
| | 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable | EMI & EMS | FCC Class A, CE EN61000-4-2, |
| | EIA/TIA-568 100-ohm (100m) | | CE EN61000-4-3, CE EN61000-4-4, |
| Optical Fiber | 1.25Gbps: | | CE EN61000-4-5, CE EN61000-4-6, |
| | Multi mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 | | CE EN61000-4-8, CE EN61000-4-11, |
| | km, 1310 nm (50/125 µm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm | | CE EN55032 Class A, CE EN55024 |
| | (9/125 µm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 | Safety | UL |
| | nm (9/125 µm) | | UL Class I Division II for Group A,B,C and D |
| | 125Mbps: | | hazardous location; |
| | Multi mode: 0 to 2 km/ 5 km, 1310 nm (62.5/125 μm) | | ATEX Directive 94/9/EC (-C1D2/ATEX model) |
| | Single mode: 0 to 30 km, 1310 nm (62.5/125 μm) | Stability Testing | IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), |
| | WDM 1.25Gbps: Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 | | IEC60068-2-6 (Vibration) |
| | | | , , |
| | | Power | 9.86 W at full load |
| | nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to | Power Consumption | 9.86 W at full load |
| | | | 9.86 W at full load 1,221,554 hours |

Datasheet Version 2.81



| Software Sp | ecification | Forwarding | cameras |
|-------------------------|---|-------------------|---|
| Management | SNMP v1 v2c, v3/ Web/Telnet/CLI | | IGMP source to auto learn multicast stream and |
| SNMP MIB | RFC 1215 Traps MIB, | | forward the traffic only to multicast router ports |
| | RFC 1213 MIBII | IP Source Guard | Supports 10 IP addresses that have permission to |
| | RFC 1158 MIBII | | access the switch management and to prevent |
| | RFC 1157 SNMP MIB, | | unauthorized intruder. |
| | RFC 1493 Bridge MIB, | Login Security | Supports IEEE802.1X Authentication/RADIUS/Telnet |
| | RFC 1573 IF MIB | Flow Control | Supports Flow Control for Full-duplex and Back |
| | RFC 2674 VLAN MIB. | | Pressure for Half-duplex |
| | Partial RFC 1757 RMON, | System Log | Supports System log record and remote system log |
| | RFC 2790 Host Resource MIB | ., | server |
| | LLDP MIB* | SMTP | Supports SMTP Server and 6 e-mail accounts for |
| | RSTP MIB* | | receiving event alert |
| | Private MIB | SNTP | Supports SNTP to synchronize system clock to |
| System Information | Show detail info incl.Name, Version | OIVII | Internet |
| | CPU load monitoring for every 1,5,15 minutes | Bandwidth Control | Support ingress packet filter and egress packet limit |
| | Display network parameters incl. Mac, IP, Gateway, | & Storm Control | The egress rate control supports all of packet type |
| | Netmask | & Stoffi Control | and the limit rates are 100K~102400Kbps(10/100), |
| | Allow adding port description | | 100K~256000Kbps(1000) |
| Pro-Ring2se | Pro-Ring 2se system Topologies for network recovery | | Ingress filter packet type combination rules are |
| | in less than 20ms up to 50 switches. | | Broadcast/Multicast/Unknown Unicast packet, |
| | in icos than zomo up to oo switches. | | Broadcast/Multicast packet, Broadcast packet only |
| | Note:Pro-Ring2s is not compatible with Pro- | | and all of packet. The packet filter rate can be set |
| | Ring2s/Pro-RingII/Pro-Ring I; 20ms recovery is on | | from 100K~102400Kbps(10/100), |
| | fiber port. | | 100K~256000Kbps(1000) |
| Modbus/TCP** | Supports Modbus/TCP to manage and monitor | Relay Alarm | Provides one relay output for port breakdown, power |
| Wodbas/Tel | switch under SCADA system | Rolay Alailii | fail alarm. |
| VLAN | Port Based VLAN | | Alarm Relay current carry ability: 1A @ DC24V |
| VLAIN | IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up | SNMP Trap | 1. Cold start |
| | to 4K, VLAN ID can be assigned from 1 to 4096.) | SINIVIE HAP | 2. Link down |
| Dort Trunk with | | | 3. Link up |
| Port Trunk with LACP | LACP Port Trunk: 4 Trunk groups/Maximum 4 trunk | | 4. Authorization fail |
| LLDP | members | DHCP | Provides DHCP Client/ DHCP Server/ Port and IP |
| LLUP | Supports LLDP to allow switch to advise its | DHCP | |
| <u> </u> | identification and capability on the LAN | DNO | Binding |
| Spanning Tree | Supports IEEE802.1d Spanning Tree, IEEE802.1w | DNS | Provide DNS client feature and support Primary and |
| | Rapid Spanning Tree | | Secondary DNS server. |
| Quality of Service | The quality of service determined by port, Tag and | Firmware Update | Supports TFTP/Web firmware update, TFTP backup |
| | IPv4 Type of service, IPv4/IPv6 Different Service | | and restore. White list for TFTP upgrade and |
| Class of Service | Supports IEEE802.1p class of service, per port | | configuration editable file |
| | provides 4 priority queues | Factory reset & | Factory reset bottom can restore all setting back to |
| Port Security | Supports 100 entries of MAC address for static MAC | Watchdog design | factory default and Watchdog design to automatically |
| | and another 100 for MAC filter | | reboot switch when CPU loading is too high |
| Port Mirror | Supports 3 mirroring types: "RX, TX and Both | | *Future Release |
| | packet" | | **Optional |
| IGMP & Static | Supports IGMP snooping v1,v2 and Query | | ***Optional DDM SFP required |
| Multicast | 256 static multicast forwarding groups for non-IGMP | | |

ORDERING INFOMATION

■ IES-2208CA......P/N: 8350-451

8 10/100TX + 2 10/100T/Dual Speed SFP Combo Industrial Managed Ethernet Switch; -20°C to 60°C

■ IES-2208CA-E......P/N: 8350-452

8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo Industrial Managed Ethernet Switch; -40°C to 75°C

■ IES-2208CA-C1D2/ATEX......P/N: 8350-452-C1D2/ATEX

 $8\ 10/100TX + 2\ 10/100/1000T/Dual\ Speed\ SFP\ Combo\ Industrial\ Managed\ Ethernet\ Switch; -40°C\ to\ 75°C;\ ATEX\ Directive\ 94/9/EC$

■ IES-2208CA-MOD......P/N: 8350-451-MOD

8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo Industrial Managed Ethernet Switch; -20°C to 60°C; Modbus/TCP

■ IES-2208CA-MOD-E......P/N: 8350-452-MOD

8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo Industrial Managed Ethernet Switch; -40°C to 75°C; Modbus/TCP

■ IES-2208CA-DNV*......P/N: 8350-452-DNV

 $8\ 10/100TX + 2\ 10/100/1000T/Dual\ Speed\ SFP\ Combo\ Industrial\ Managed\ Ethernet\ Switch; -40°C\ to\ 75°C;\ DNV\ Type\ Approval*$



OPTIONAL ACCESSORIES

DIN Rail Power

■ MDR-40 Series 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2;

Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from $60^{\circ}\text{C} \sim 70^{\circ}\text{C}$)

■ MDR-20 Series 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Mini GBIC (SFP)

| MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver | 8330-187 | 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550) |
|--|---|--|
| MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver | 8330-180 | 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310) |
| MINI GBIC 1000LX (LC/SM/10KM) Transceiver | 8330-182 | 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550) |
| MINI GBIC 1000LHX (LC/SM/40KM) Transceiver | 8330-181 | 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310) |
| MINI GBIC 1000XD (LC/SM/50KM) Transceiver | 8330-183 | 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550) |
| MINI GBIC 1000XD (LC/SM/60KM) Transceiver | 8330-184 | 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490) |
| MINI GBIC 1000ZX (LC/SM/80KM) Transceiver | 8330-185 | 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550) |
| MINI GBIC 1000EZX (LC/SM/120KM) Transceiver | 8330-071 | 125Mbps BiDi SFP 2KM (WDM 1310) Transceiver |
| MINI GBIC 10/100/1000T (100m) Transceiver | 8330-072 | 125Mbps BiDi SFP 2KM (WDM 1550) Transceiver |
| MINI GBIC 100Base (LC/MM/2KM) Transceiver | 8330-069 | 125Mbps BiDi SFP 20KM (WDM 1310) Transceiver |
| MINI GBIC 100Base (LC/MM/5KM) Transceiver | 8330-068 | 125Mbps BiDi SFP 20KM (WDM 1550) Transceiver |
| MINI GBIC 100Base (LC/SM/30KM) Transceiver | 8330-080 | 125Mbps BiDi SFP 40KM (WDM 1310) Transceiver |
| 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) | 8330-082 | 125Mbps BiDi SFP 40KM (WDM 1550) Transceiver |
| 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) | 8330-081 | 125Mbps BiDi SFP 60KM (WDM 1310) Transceiver |
| 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310) | 8330-083 | 125Mbps BiDi SFP 60KM (WDM 1550) Transceiver |
| 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) | 8330-084 | 125Mbps BiDi SFP 80KM (WDM 1310) Transceiver |
| 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) | 8330-085 | 125Mbps BiDi SFP 80KM (WDM 1550) Transceiver |
| 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550) | 8330-191 | Dual Speed SFP 100M/1000M-LX 10KM Transceiver |
| 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310) | All part no. w | vith D are with DDM function |
| | MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver MINI GBIC 1000LX (LC/SM/10KM) Transceiver MINI GBIC 1000LHX (LC/SM/40KM) Transceiver MINI GBIC 1000LHX (LC/SM/50KM) Transceiver MINI GBIC 1000XD (LC/SM/50KM) Transceiver MINI GBIC 1000ZX (LC/SM/80KM) Transceiver MINI GBIC 1000EZX (LC/SM/80KM) Transceiver MINI GBIC 1000EZX (LC/SM/80KM) Transceiver MINI GBIC 100Base (LC/MM/2KM) Transceiver MINI GBIC 100Base (LC/MM/5KM) Transceiver MINI GBIC 100Base (LC/MM/5KM) Transceiver MINI GBIC 100Base (LC/SM/30KM) Transceiver 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1350) | MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver MINI GBIC 1000LX (LC/SM/10KM) Transceiver MINI GBIC 1000LHX (LC/SM/10KM) Transceiver MINI GBIC 1000LHX (LC/SM/50KM) Transceiver MINI GBIC 1000XD (LC/SM/50KM) Transceiver MINI GBIC 1000XD (LC/SM/50KM) Transceiver MINI GBIC 1000XZ (LC/SM/60KM) Transceiver MINI GBIC 1000EZX (LC/SM/80KM) Transceiver MINI GBIC 1000EZX (LC/SM/120KM) Transceiver MINI GBIC 100DEZX (LC/SM/120KM) Transceiver MINI GBIC 100Base (LC/MM/2KM) Transceiver MINI GBIC 100Base (LC/MM/2KM) Transceiver MINI GBIC 100Base (LC/MM/5KM) Transceiver MINI GBIC 100Base (LC/SM/30KM) Transceiver MINI GBIC 100Base (LC/SM/30KM) Transceiver MINI GBIC 105Base (LC/SM/30KM) Transceiver MINI GBIC 5FP 0.5KM Transceiver (WDM 1310) 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1350) 8330-081 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1350) 8330-084 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 8330-085 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 8330-084 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 8330-085 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 8330-085 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) 8330-085 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1350) 8330-085 |

Lantech Communications Global Inc.

www.lantechcom.tw info@lantechcom.tw

© 2016 Copyright Lantech Communications Global Inc. all rights reserved.

The revise authority rights of product specifications belong to Lantech Communications Global Inc.

Lantech may make changes to specification and product descriptions at anytime, without notice.