

# IGS-5488MGSFP

8 10/100/1000T + 8 100M/1G SFP + 4 1G/2.5G SFP

w/ L2+ Industrial Managed Ethernet Switch w/ Enhanced G.8032 Ring;

24V/HV input models

- Dual isolated input 9V~60VDC voltage (24V model) or Single isolated input power 90~305VAC/120~430VDC (HV model)
- Enhanced G.8032 ring covers multicast packets; MSTP 8/16\* MSTI /RSTP ; support MRP ring\*\*Miss-wiring avoidance & node failure protection
- Miss-wiring avoidance & node failure protection
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values\*\*\*; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82; Port based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3, TACACS+, QinQ\*, SMS\*\*
- Protocol based VLAN ; IPv4/IPv6 Subnet based VLAN
- Built-in Environmental Monitoring for temp, voltage & current
- Wide range operation temperature (-E model):-40~75C/-40~167F; Fan-less design



## OVERVIEW

Lantech IGS-5488MGSFP is a high performance L2+ (All Gigabit) Ethernet switch with 8 10/100/1000T + 8 100M/1G SFP + 4 1G/2.5G SFP auto-sensing cage which provides L2 wire speed and advanced security function for network aggregation deployment.

It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also support basic mode and enhanced mode, multiple VLAN model with easy configuration. The comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, TACACS+, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ\*\* are supported and also required in large network.

The Cisco Discovery Protocol (CDP) and LLDP are supported for Ciscoworks to detect the switch info and show on L2 map topology. The enhanced platform allows quick booting up time under 50 seconds.

### **Miss-wiring avoidance, Loop protection, Node failure protection**

The IGS-5488MGSFP also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IGS-5488MGSFP is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power

breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection

### **DHCP option 82 & Port based, Mac based DHCP, Option66, IPv6 DHCP server\*\***

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Optional IPv6 address resolution for DHCP service can be supported.

### **User friendly GUI, Auto topology drawing**

The user friendly UI, innovative auto topology drawing and topology demo makes IGS-5488MGSFP much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

### **Enhanced G.8032 ring, 8/16\*\* MSTI MSTP; MRP ring**

Lantech IGS-5488MGSFP features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring

by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8/16\*\* MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

#### **QoS by VLAN\*\* for legacy device**

QoS by VLAN\*\* can allow switch to tag QoS by VLAN\*\* regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

#### **QinQ ,and GVRP supported**

It supports the QinQ and GVRP for large VLAN segmentation.

#### **IGMPv3, GMRP, router port, static multicast forwarding and multicast Ring protection**

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port and static multicast forwarding binding by ports for video surveillance application.

#### **Exported configuration file, USB port for upload & download configuration file, factory reset button**

The configuration file of Lantech IGS-5488MGSFP can be exported and edited with word processor for the other switches configuration with ease.

The factory reset button can restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead. IGS-5488MGSFP also supports dual image firmware function\*

The built-in USB port can upload/download the configuration file through USB dongle for switch replacement.

#### **2DI/2DO for relay contact and event alerting by email & traps**

The IGS-5488MGSFP DIDO function can support additional open/close physical contact for designate applications besides

Port / Power events, for example, DIDO function can trigger alarm if the switch was moved or stolen.

In case of event, the IGS-5488MGSFP is able to send an email & SMS\*\* text message to pre-defined addresses as well as SNMP Traps out immediately. It provides 2DI and 2DO when disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

#### **Built-in Environmental monitoring for switch inside information (-M model)**

The environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps, email and SMS\*\* alert when abnormal.

#### **24V/HV isolated input voltage selection: dual 9V-60VDC (24V model) or single 90~305VAC/120~430VDC (HV model)**

The IGS-5488MGSFP is able to work from 9VDC to 60VDC (24V model). Or with single high power supply at 90~305VAC / 120~430VDC (HV model).

#### **Industrial hardened design with high EFT and ESD protection**

Lantech IGS-5488MGSFP features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. Featured with relay contact alarm function, the IGS-5488MGSFP is able to connect with alarm system in case of power failure or port disconnection. The IGS-5488MGSFP also provides  $\pm 2000V$  EFT and  $\pm 6000V$  ESD protection, which can reduce unstable situation caused by power line and Ethernet.

It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory applications. The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C


## FEATURES & BENEFITS


- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>■ 8 10/100/1000T + 8 100M/1G SFP+ 4 1G/2.5G SFP auto-sensing cage w /L2+ industrial managed Ethernet switch (Total 20 Ports Switch)</li> <li>■ Dual isolated input from 9V~60VDC(24V model);Single isolated input power from 90~305VAC/120~430VDC(HV model)</li> <li>■ Back-plane (Switching Fabric): 52Gbps</li> <li>■ 16K MAC address table</li> <li>■ DDM to support SFP diagnostic function***               <ul style="list-style-type: none"> <li>• Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance</li> </ul> </li> <li>■ 10KB Jumbo frame</li> <li>■ User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting</li> <li>■ Enhanced G.8032 Ring protection in 20ms for single ring               <ul style="list-style-type: none"> <li>• Support various ring/chain topologies, including</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>enhanced ring &amp; basic ring               <ul style="list-style-type: none"> <li>• Enhanced G.8032 ring configuration with ease</li> <li>• Cover multicast and data packets protection</li> </ul> </li> <li>■ Provides EFT protection <math>\pm 2000</math> VDC for power line</li> <li>■ Supports <math>\pm 6000</math> VDC Ethernet ESD protection</li> <li>■ Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority</li> <li>■ QoS by VLAN to prioritize all devices in the network</li> <li>■ IEEE 802.1d STP, IEEE 802.1w RSTP,802.1s MSTP VLAN redundancy with 8/16** MSTI</li> <li>■ 4K 802.1Q VLAN, Port based VLAN, GVRP and QinQ</li> <li>■ Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console</li> <li>■ DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server Port based DHCP server; DHCP Option 66; IPv6 address resolution for DHCP server**</li> <li>■ Mac based DHCP server to assign IP address that includes dumb switches in DHCP network</li> </ul> |
|---|--|

- **Bandwidth Control**
  - Ingress packet filter and egress rate limit
  - Broadcast/multicast packet filter control
- **Relay alarm output system events**
- **Miss-wiring avoidance**
  - LED indicator
- **Node failure protection**
  - Ensure the switches in a ring to survive after power breakout is back
  - The status can be shown in NMS when each switch is back
- **TFTP/SFTP\*\*/HTTP firmware upgrade**
- **System Event Log, SMTP Email alert, SMS\*\* mobile (text) and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
  - SSL/SSH/INGRESS/EGRESS ACL L2/L3
  - Port Security: MAC address entries/Filter/static MAC-Port binding
  - IP Security: IP address security management to prevent unauthorized intruder.
  - TACACS+
  - Login Security: IEEE802.1X/RADIUS
- HTTPS for secure access to the web interface
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **IGMP router port to assign query in ring for reversed multicast video flow**
- **IGMPv1,v2,v3 with Query mode for multi media**
- **Dual image firmware support**
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch when CPU is found dead**
- **Environmental monitoring for system input voltage, current, and ambient temperature**
- **Supports DIDO (Digital Input/Digital Output)**
- **Configuration backup and restoration**
  - Supports text configuration file for system quick installation
  - USB port to upload/download configuration file by USB dongle
- **IP30 metal housing with DIN rail and Wall-mount\*\* design**

## DIMENSIONS (unit=mm)

### 24V model

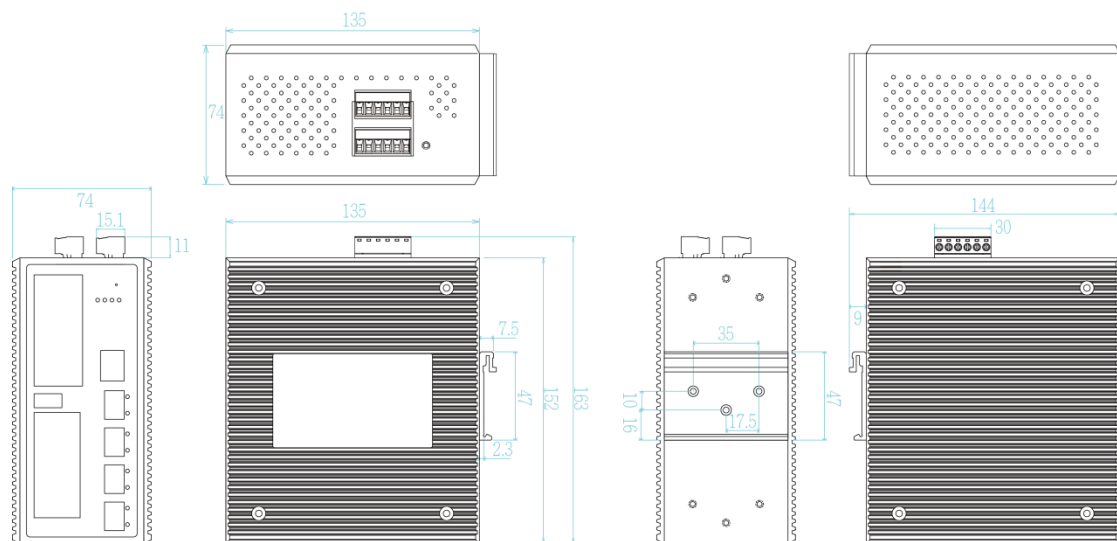

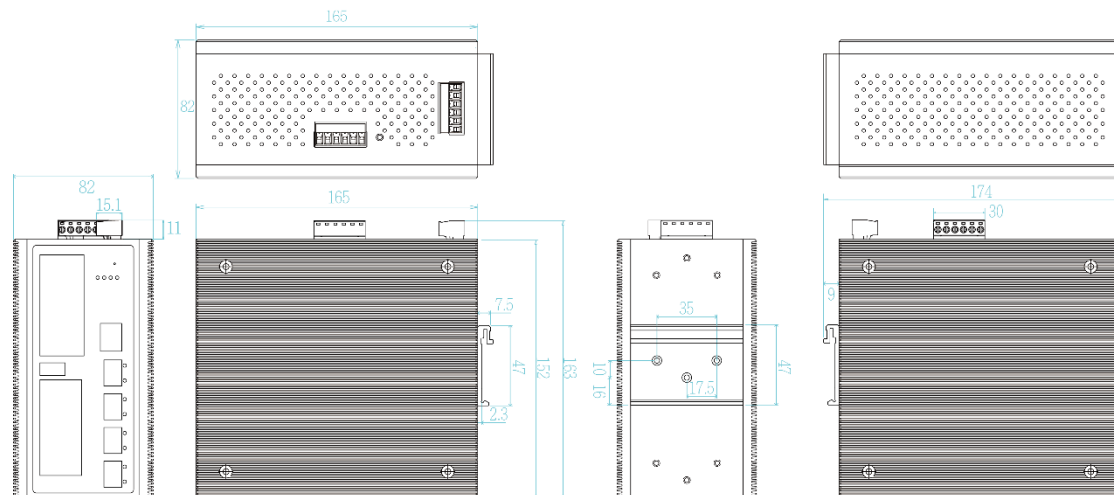**HV model****SPECIFICATION****Hardware Specification**

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag; Q-Bridge MIB**
Switch Architecture	Back-plane (Switching Fabric): 52Gbps
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100/1000T: 8 x ports RJ-45 with Auto MDI/MDI-X function Mini-GBIC: 8x 100M/1G SFP + 4 x 1G/2.5G SFP auto-sensing cage with DDMI RS-232 connector: RJ-45 type USB x 1 Power & Relay connector: 1 x 6-pole terminal block DIDO : 1 x 6-pole terminal block
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable; EIA/TIA-568 100-ohm (100m) 1000Base-T: 4-pair UTP/STP Cat5E/6 cable; 10GBaseT:4-pair STP Cat6/6A/7 cable
Optical Cable	<b>1Gbps:</b> Multi mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm) <b>2.5Gbps</b> Multi mode: 0 to 300 m, 850 nm (50/125 μm); Single mode: 0 to 2 km/ 15 km/ 40 km, 1310 nm (9/125 μm); 0 to 40 km/ 80 km/ 100km, 1550 nm (9/125 μm) <b>WDM 1Gbps:</b> Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to 10 km/ 20 km/ 40 km/ 60 km/

	80 km, 1550 nm (9/125 μm) <b>WDM 2.5Gbps</b> Single mode: 0 to 5 km/ 20 km/ 40 km/ 60 km, 1310 /1550nm (9/125 μm); 0 to 80 km, 1490/1550 nm (9/125 μm)
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Green); Mini-GBIC: Link/Activity (Green)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F(-E model)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	Dual DC isolated input, 9~60VDC (24V model) Single HV isolated input, 90~305VAC/120~430VDC (HV model)
Power Consumption	18W
Case Dimension	Metal case. IP-30, 74 (W) x 135 (D) x 152 (H) mm (24V/model) 74 (W) x 165 (D) x 152 (H) mm (HV model)
Weight	900 g
Installation	DIN Rail and Wall Mount*** Design
EMI & EMS	FCC Class A, CE EN55032 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5 ED3, CE EN61000-4-6, CE N61000-4-8, EN61000-4-11
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
MTBF	659,028.7 Hrs (standards: IEC 62830)
Warranty	5 years
<b>Software Specification</b>	
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI
SNMP MIB	RFC 1215 Traps MIB*, RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 VLAN MIB*, Partial RFC 1757 RMON,

	RFC 2674 Q-Bridge MIB*; Bridge MIB, LLDP MIB, RSTP MIB*, Private MIB		IGMP router port ; IGMP query; GMRP
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support basic single ring & enhanced ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection	Static multicast forwarding	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
User friendly UI	<ul style="list-style-type: none"> <li>Auto topology drawing</li> <li>Topology demo</li> <li>Auto configuration for G.8032(auto mode*) for single ring</li> <li>DDM threshold monitoring with dB values***</li> </ul> Complete CLI for professional setting	Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Port Trunk with LACP	<ul style="list-style-type: none"> <li>LACP Port Trunk: 8 Trunk groups</li> </ul>	Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN	System Log	Supports System log record and remote system log server
CDP	Cisco Discovery Protocol for topology mapping	SMTP/Text SMS**	Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS** text alert via mobile
Environmental Monitoring	System status for input voltage, current and ambient temperature to be shown in GUI and sent alerting if any abnormal status(-M model)	Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP, QinQ, Protocol based VLAN; IPv4/IPv6 Subnet based VLAN	Protection	<ul style="list-style-type: none"> <li>Miss-wiring avoidance</li> <li>Node failure protection</li> </ul>
IPv6/4	Present	SNMP Trap	Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> <li>Device cold start</li> <li>Authorization failure</li> <li>Port link up/link down</li> <li>DI/DO open/close</li> <li>Typology change(ITU ring)</li> <li>Power failure</li> <li>Environmental abnormal</li> </ul>
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8/16** MSTI	DHCP	<ul style="list-style-type: none"> <li>Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Option 66; IPv6 address resolution for DHCP server**</li> </ul>
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP	Mac based DHCP Server	Assign IP address by Mac that can include dumb switch in DHCP network
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues	DNS	Provide DNS client feature and support Primary and Secondary DNS server
QoS by VLAN	Tagged QoS by VLAN for all devices in the network	SNTP	Supports SNTP to synchronize system clock in Internet
IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.	Firmware Update	Supports TFTP/SFTP** firmware update, TFTP backup and restore; HTTP firmware upgrade
Login Security	Supports IEEE802.1X Authentication/RADIUS	Configuration upload and download	Supports text configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; USB auto restore/backup USB port for upload/download configuration by USB dongle
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"	Dual Image Firmware	Support dual image firmware function
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/static MAC-Port binding Ingress/Egress ACL L2/L3 SSL/ SSH for Management HTTPS for secure access to the web interface TACACS+ for Authentication		
IGMP	Support IGMP snooping v1,v2,v3; 1024 multicast groups;		

\*Future release

\*\*Optional

\*\*\*Optional DDM SFP required

## ORDERING INFORMATION

- **IGS-5488MGSFP-24V.....P/N: 8361-810**  
8 10/100/1000T + 8 100M/1G SFP + 4 1G/2.5G SFP Auto sensing cage L2+ Industrial Managed Ethernet Switch; 20°C to 60°C; dual isolated input 9V~60V
- **IGS-5488MGSFP-24V-E.....P/N: 8361-8101**  
8 10/100/1000T + 8 100M/1G SFP + 4 1G/2.5G SFP Auto sensing cage L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; dual isolated input 9V~60V
- **IGS-5488MGSFP-HV.....P/N: 8361-811**  
8 10/100/1000T + 8 100M/1G SFP + 4 1G/2.5G SFP Auto sensing cage L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; single high power 90~305VAC/120~430VDC

- **IGS-5488MGSFP-HV-E.....P/N: 8361-8111**  
 8 10/100/1000T + 8 100M/1G SFP + 4 1G/2.5G SFP Auto sensing cage L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; single high power 90~305VAC/120~430VDC

## OPTIONAL ACCESSORIES

### DIN Rail Power

- **NDR-240-48** 240W (48V 5A) Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120-48** 120W (48V 2.5A) Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

### Mini GBIC (SFP)

- |  |  |
|--|--|
| ■ <b>8330-162X</b> MINI GBIC 1000SX (LC/0.5km) Transceiver     | ■ <b>8330-189</b> LTSFP-1000BX-10KM Transceiver (WDM 1550)           |
| ■ <b>8330-163X</b> MINI GBIC 1000SX2 (LC/2km) Transceiver      | ■ <b>8330-186</b> LTSFP-1000BX-20KM Transceiver (WDM 1310)           |
| ■ <b>8330-165X</b> MINI GBIC 1000LX (LC/10km) Transceiver      | ■ <b>8330-187</b> LTSFP-1000BX-20KM Transceiver (WDM 1550)           |
| ■ <b>8340-0591</b> MINI GBIC 1000LHX (LC/40km) Transceiver     | ■ <b>8330-180</b> LTSFP-1000BX-40KM Transceiver (WDM 1310)           |
| ■ <b>8330-060</b> 100Base FX 2KM, Multi-mode, LC Transceiver   | ■ <b>8330-182</b> LTSFP-1000BX-40KM Transceiver (WDM 1550)           |
| ■ <b>8330-065</b> 100Base FX 5KM, Multi-mode, LC Transceiver   | ■ <b>8330-181</b> LTSFP-1000BX-60KM Transceiver (WDM 1310)           |
| ■ <b>8330-061</b> 100Base LX 30KM, Single-mode, LC Transceiver | ■ <b>8330-183</b> LTSFP-1000BX-60KM Transceiver (WDM 1550)           |
| ■ <b>8330-166</b> MINI GBIC 1000XD (LC/50km) Transceiver       | ■ <b>8330-184</b> LTSFP-1000BX-80KM Transceiver (WDM 1490)           |
| ■ <b>8330-169</b> MINI GBIC 1000XD (LC/60km) Transceiver       | ■ <b>8330-185</b> LTSFP-1000BX-80KM Transceiver (WDM 1550)           |
| ■ <b>8330-167</b> MINI GBIC 1000ZX (LC/80km) Transceiver       | ■ <b>8330-262D</b> MINI GBIC 2.5G 850nm VCSEL (LC/0.3km) Transceiver |
| ■ <b>8330-170</b> MINI GBIC 1000EZ (120km) Transceiver         | ■ <b>8330-263D</b> MINI GBIC 2.5G 1310nm FP (LC/2km) Transceiver     |
| ■ <b>8330-168</b> MINI GBIC 1000T (100m) Transceiver           | ■ <b>8330-265D</b> MINI GBIC 2.5G 1310nm DFB (LC/15km) Transceiver   |
| ■ <b>8330-188</b> LTSFP-1000BX-10KM Transceiver (WDM 1310)     |  |

All SFP ended with D are with Diagnostic function

### Lantech Communications Global Inc.

www.lantechcom.tw  
 info@lantechcom.tw

© 2017 Copyright Lantech Communications Global Inc. all rights reserved.  
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
 Lantech may make changes to specification and product descriptions at anytime, without notice.