

TPGS-R6608XFT

8 10/100/1000T + 4 10G Copper + 2 10G Fiber Q-ODC OM3 w/8/10/12 PoE,
 EN50155 OS4 Managed Ethernet Switch w/ Enhanced G.8032 Ring, PXE ;

WVI input

- Total 8 port 10/100/1000T + 4 1G/2.5G/5G/10G Copper + 2 1G/10G Q-ODC OM3 SR/LR Fiber Ethernet Switch w/8 or w/10/12 (incl.8 10/100/1000T + 2/4 uplink 10GT copper) PoE ports
- Support IEEE802.3af/af up to 30W per port PoE management incl. Detection and Scheduling
- Support PXE to verify switch firmware with the latest or certain version on server
- Enhanced G.8032 ring protection < 20ms for single ring. Supports enhanced mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP; support MRP ring
- Miss-wiring avoidance & node failure protection
- Inrush current protection
- User friendly UI, including auto topology drawing ; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; Port based DHCP distribution, Mac based DHCP server, SSH v2/SSL, HTTPS, INGRESS ACL L2/L3, TACACS+, QinQ, QoS by VLAN
- Protocol based VLAN ; IPv4 Subnet based VLAN
- Enhanced Environmental Monitoring for temp., actual input voltage, current & total power load
- Optional smart bypass on 10GT Copper ports in case of power failure, CPU hang (up to two pairs copper bypass and one pair fiber bypass)
- IP54 aluminum enclosure
- Optional L3Lite or IEEE61375-2-5 TBN features to be upgradable
- USB port to upload & download the configuration file
- Dual power input 16.8V~137.5V with galvanic isolation between input power, PoE and system
- Factory reset pin to restore to factory default setting
- Wide range operation temperature : -40C~70C/-40F~158F



OVERVIEW

Lantech TPGS-R6608XFT is a high performance OS4 Ethernet switch with 8 10/100/1000T + 4 1G/2.5G/5G/10G Copper + 2 1G/10G Q-ODC OM3 SR/LR Fiber with 8 or 10/12 (incl.8 10/100/1000T + 2/4 uplink 10GT copper) PoE 802.3af/at ports which provides advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports enhanced mode with easy configuration. The comprehensive QoS, advanced security including INGRESS ACL L2/L3, TACACS+, SSH v2/SSL and Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port are supported and also required in large network. It also supports 10K Jumbo frames.

Up to 8/10/12 PoE at/af ports w/advanced PoE management
 Compliant with 802.3af/at standard, the Lantech TPGS-R6608XFT is able to feed each PoE port up to 30 Watt at each PoE port for various IP PD devices. Lantech TPGS-R6608XFT

supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE port can be enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Dual WVI input with max PoE budget and Inrush current protection

The TPGS-R6608XFT WVI model accept 16.8~137.5VDC dual input with galvanic protection and can feed 54V output for PoE feeding with 80W budget. A voltage which can be minimal 0.5 Un nominal voltage (when $V_{in} \geq 36V$) and/or a voltage which can be maximal 1.5 Un nominal voltage for more than 1000 consecutive ms (one second).

The inrush current on initial power up can be limited lower than 10 x nominal current and for less than 1ms.

Miss-wiring avoidance, node failure protection, Loop protection

The TPGS-R6608XFT also embedded several features for strong and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech TPGS-R6608XFT is able to alert with the LED indicator and disable ring automatically.

Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back.

Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

Support PXE to verify switch with the latest or certain version

The switch can check its firmware version during booting time via PXE protocol. If switch finds any newer version, it will upload automatically.

DHCP option 82 & Port based, Mac based DHCP, Option66, IPv6 DHCP server

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Option66 server can offer IP address of TFTP server to DHCP client for VOIP application. Basic IPv6 DHCP service can be supported.

User friendly GUI, Auto topology drawing

The user friendly UI, innovative auto topology drawing and topology demo makes TPGS-R6608XFT much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

Enhanced G.8032 ring, MSTP 8 MSTI; MRP ring and GVRP supported

Lantech TPGS-R6608XFT features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8 MSTI. MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN

Lantech OS4 Ethernet switches comply with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).

Enhanced Storm control*

Storm control prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces and the detection is more precise and reaction is more efficient.

Optional L3Lite/L3*/ETBN to be upgradable

Lantech OS4 are optional upgradable to L3 Lite/ L3* or ETBN communication protocols for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter-VLAN routing. Optional ETBN complies with IEC61375-2-5 ETBN for Train Backbone Network.

QinQ, QoS and GVRP supported

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD Snooping and static multicast forwarding binding by ports for video surveillance application.

Protocol based VLAN; Subnet based VLAN

The protocol-based VLAN processes traffic based on protocol. It filters IP traffic from nearby end-stations using a particular protocol such as IP, IPX, ARP or other Ethernet-types in a Hex value. Subnet based VLANs group traffics into logical VLANs based on the source IP address and IP subnet.

The above features can help to build VLAN in the network mixed with managed and un-managed switch as to define packets to which VLAN group based on protocol or subnet.

Editable configuration file; USB port for upload/download configuration

The configuration file of Lantech TPGS-R6608XFT can be exported and edited with word processor for the following switches to configure with ease. The USB port can upload/download the configuration from/to USB dongle.

2 DI + 2DO; Factory default pin

TPGS-R6608XFT provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the outside alarm and switch will send alert information to IP network with email and traps. The factory reset pin can restore the setting back to factory default.

Optional smart bypass protection on dual 10GT copper ports and 10GT fiber port****

The bypass relay is set to bypass the switch to the next one when power is off to prevent network disruption. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Optional smart bypass (up to two pairs copper bypass and one pair fiber bypass) can be activated when switch encounters power failure or CPU hang. (-BT/-BBT/-BF/-BBT-BF model)

Our uplink port design is able to support PoE and bypass at different times depending on the requirement.

Enhanced environmental monitoring for switch inside information

The enhanced environmental monitoring can detect switch overall temperature, total power load, actual input voltage and current. It also can send the SNMP traps alert when abnormal.


EN50155, EN45545-2; EN61373 compliance; High ESD protection

TPGS-R6608XFT passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke and EN50155. The TPGS-R6608XFT is best switch for railway on-board/track side, vehicle and mining applications. For more usage flexibilities, TPGS-R6608XFT supports wide operating temperature from -40°C to 70°C. (85°C operation for 10 min.)

FEATURES & BENEFITS

- 8 10/100/1000T + 4 1G/2.5G/5G/10G Copper X-coded + 2 1G/10G Q-ODC OM3 SR/LR Fiber w/8 or 10/12 (incl.8 10/100/1000T + 2/4 uplink 10GT copper) PoE 802.3af/at ports (Total 14 Ports Switch) to feed power up to 30W for active mode operation
- Dual WVI input (16.8V~137.5VDC) for PoE budget 80W
- Galvanic isolation from power input/Ethernet ports to system 1.5KV
- PoE management including PoE detection and scheduling for PD (power devices)
- Back-plane (Switching Fabric): 136Gbps
- 16K MAC address table
- 10KB Jumbo frame
- User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms for single ring
 - Support various ring/chain topologies, including enhanced ring & basic ring
 - Enhanced G.8032 ring configuration with ease
 - Cover multicast and data packets protection
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- IEEE 802.1d STP, IEEE 802.1w RSTP,802.1s MSTP VLAN redundancy with 8 MSTI
- Subnet VLAN and protocol VLAN
- 4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console
- Support PXE to verify switch firmware with the latest or certain version
- DHCP server / client / DHCP Option 82 relay; Port based DHCP server; DHCP Option 66 ; basic IPv6 DHCP server
- Mac based DHCP server to assign IP address that in DHCP network
- Bandwidth Control
 - Ingress packet filter and egress* rate limit
 - Broadcast/multicast packet filter control
- Miss-wiring avoidance
 - LED indicator
- Node failure protection
 - Ensure the switches in a ring to survive after power breakout is back
 - The status can be shown in NMS when each switch is back
- System Event Log, SMTP alert and SNMP Trap for alarm support
- Security
 - SSL/SSH v2/INGRESS ACL L2/L3
 - Mac address table: MAC address entries/Filter/static MAC-Port binding
 - Remote Admin: IP address security management to prevent unauthorized intruder
 - TACACS+
 - Login Security: IEEE802.1X/RADIUS
 - HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
- IGMP router port for multicast protection
- MLD snooping for IPv6 Multicast steam
- IGMPv1,v2,v3 with Query mode for multi media
- Dual image firmware support
- Factory reset pin to restore setting to factory default
- Enhanced environmental monitoring for system real input voltage, current, ambient temperature and total PoE load
- Supports 2DI/2DO (Digital Input/Digital Output)
- Configuration backup and restoration
 - Supports editable configuration file for system quick installation
 - USB port for upload/download the config
- TFTP/HTTP firmware upgrade
- Wide operation temperature: -40C~70C/-40F~158F (85°C operation for 10 min.)
- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration compliance
- Optional smart bypass (up to two pairs copper bypass and one pair fiber bypass) (-BT/-BBT/-BF/-BBT-BF model)
- Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN
- Diagnostic including Ping / ARP table / DDM information
- Enhanced Storm Control*
- Optional L3Lite/L3*/ETBN to be upgradable
- IP54 aluminum housing with wall mount design

DIMENSIONS (unit=mm)

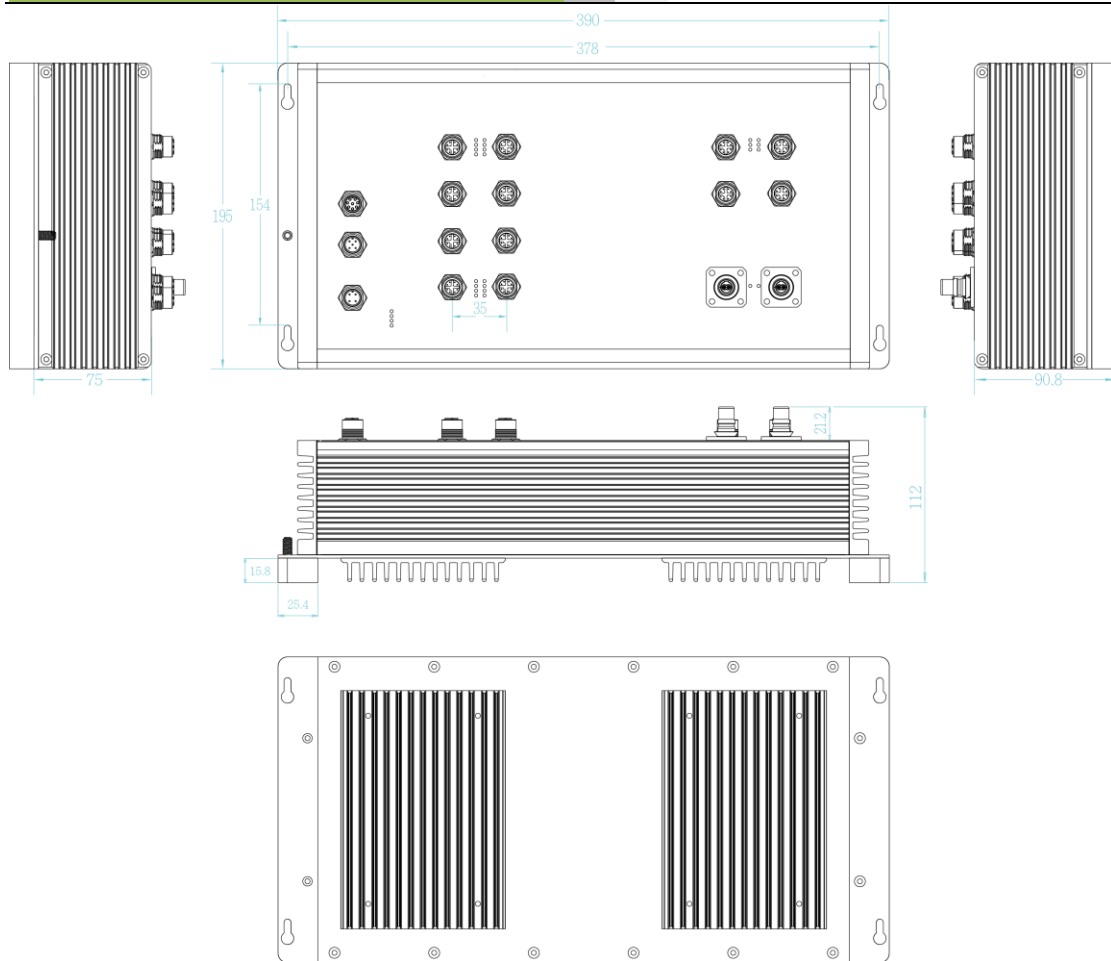

SPECIFICATIONS

Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3an 10Gbase-T IEEE802.3ae 10Gbase-SR/LR IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet
Switch Architecture	Back-plane (Switching Fabric): 136Gbps
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100/1000T: 8 x M12 8-pole X-coded with Auto MDI/MDI-X function 1G/2.5G/5G/10G Copper: 4x M12 8-pole X-coded port 9-12 1G/10G FX: 2x ports Q-ODC OM3 with multi-mode/single-mode fiber Power Input connector: 1 x M12 4-pole Male A-coded Reset/Console/USB : 1 x M12 8-pole A-coded DIDO: 1 x M12 5-pole A-coded

Network Cable	1000Base-T: 4-pair STP Cat5E/6 cable; 10G Copper: 4-pair STP Cat6a/7 cable 1Gbps: Multi-mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm) 10Gbps Multi-mode: 0 to 300 m, 850 nm (OM3 50/125 μm); Single mode: 0 to 10 km/ 20 km, 1310 nm (9/125 μm); 0 to 40 km/ 80km/ 100 km, 1550 nm (9/125 μm)
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) 10/100/1000T Ethernet port: Link/Activity (Green) 1G/2.5G/5G/10G port: speed (1G/2.5G/5G: Yellow ; 10G: Orange) 1G/10G fiber: Link/Act (Orange) PoE : Link/Act (Green)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-40°C~70°C/-40°F~158°F (85°C operation for 10 min.)
Storage Temperature	-40°C~85°C / -40°F~185°F

Power Supply	Dual DC input, 16.8VDC~137.5VDC									
PoE Budget	<table border="1"> <thead> <tr> <th>Input Range</th> <th>Power Input</th> <th>Maximal PoE Budget</th> </tr> </thead> <tbody> <tr> <td>16.8~27VDC</td> <td>Dual Power Input</td> <td>80W</td> </tr> <tr> <td>28~137.5VDC</td> <td>Single Power Input</td> <td>80W</td> </tr> </tbody> </table>	Input Range	Power Input	Maximal PoE Budget	16.8~27VDC	Dual Power Input	80W	28~137.5VDC	Single Power Input	80W
Input Range	Power Input	Maximal PoE Budget								
16.8~27VDC	Dual Power Input	80W								
28~137.5VDC	Single Power Input	80W								
PoE pin assignment	M12 port #1~#8 (-8 model) ; #9~#12 (-10/-12 model) ; support IEEE 802.3at/af End-point, Alternative A mode									
Power Consumption	Max. 50.9 exclude PoE load									
Dimensions	IP54 model: Aluminum case 390mm(W)x195mm(H)x112mm(D)									
Weight	5.15 kgs									
Installation	Wall Mount Design									
EMI & EMS	FCC Part 15 Class A EN61000-6-2 EN61000-6-4 CE EN55032 Class A CE EN55024 CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3									
Verifications	EN50155/EN50121-3-2/EN50121-4; EN45545-2 R13/R22/R23/R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke verification									
Stability Testing	EN61373 (Shock and Vibration)									
MTBF	339,511 hrs. (standards: IEC 62380)									
Warranty	5 years									
Bypass**	Up to two pairs copper and one pair fiber bypass on 10GT Copper ports and 10GT Fiber Q-ODC ports pass to next switch in case of power failure and CPU hang									
Software Specification										
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI									
SNMP MIB	RFC 1213 MIBII RFC 1158 MIB RFC 1157 SNMP MIB RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 Q-Bridge MIB* RFC 2819 RMON MIB Private MIB									
ITU G.8032	Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support basic single ring & enhanced rings Includes basic single ring and enhanced ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection									
PoE Management	PoE Detection to check if PD hangs then restart the PD PoE scheduling									
Per Port PoE Status	On/ Off, voltage, current, watts, temperature									
User friendly UI	<ul style="list-style-type: none"> ■ Auto topology drawing ■ Topology demo ■ Complete CLI for professional setting 									
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups									
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN									
CDP	Cisco Discovery Protocol for topology mapping									
Enhanced Environmental Monitoring	System status for actual input voltage, current , total power load and ambient temperature to be shown in GUI and sent alerting if any abnormal status									
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096) GVRP, QinQ, QoS Protocol based VLAN IPv4 Subnet based VLAN									

Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points – DSCP
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
Remote Admin	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder
Login Security	Supports IEEE802.1X Authentication/RADIUS
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/static MAC-Port binding Ingress ACL L2/L3 SSL/SSH v2 for Management HTTPS for secure access to the web interface TACACS+ for Authentication
IGMP	Support IGMP snooping v1,v2,v3; Supports; 1024 multicast groups; IGMP router port ; IGMP query; GMRP
MLD Snooping	Support IPv6 Multicast stream
Static multicast forwarding	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
Bandwidth Control	Support ingress packet filter and egress* packet limit. The egress* rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress* packet limit.
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
System Log	Supports System log record and remote system log server
Protection	<ul style="list-style-type: none"> ■ Miss-wiring avoidance ■ Node failure protection ■ Loop protection
SNMP Trap	Up to 5 trap stations; trap types including: <ul style="list-style-type: none"> ● Device cold start ● Authorization failure ● Port link up/link down ● DI/DO open/close ● Typology change(ITU ring) ● Power failure ● Environmental abnormal
PXE	PXE to verify switch firmware with the latest or certain version
DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Option 66; basic IPv6 DHCP server
Mac based DHCP Server	Assign IP address by Mac in DHCP network
DNS	Provide DNS client feature and can set Primary and Secondary DNS server
NTP/SNTP	Supports NTP/SNTP to synchronize system clock in Internet
Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
Configuration upload and download	Supports editable configuration file for system quick installation; Support factory reset pin to restore all settings back to factory default
Enhanced Storm Control*	prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces
ECN	Complies with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in

	single consist of train and interoperability with IEC61375-2-5 (TBN).		5 ETBN for Train Backbone Network. Detail SPEC upon request.
Optional L3Lite/L3*/ETBN**	Lantech OS4 are optional upgradable to L3 Lite/L3* or ETBN communication protocols for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing. Optional ETBN complies with IEC61375-2-	Diagnostic	Support Ping, ARP table and DDM information
		Dual Image Firmware	Support dual image firmware function

*Future release
** Optional release

ORDERING INFORMATION

All model packages include M12 caps. For optional bypass add -BT (one pair copper bypass); -BBT (two pairs copper bypass); -BF (one pair Fiber bypass); -BBT-BF (two pairs copper & one pair fiber bypass) to end of model names. For Coating add -C to end of model names.

- **TPGS-R6608XFT-8-QMM-54-WVI.....P/N: 8361-527**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G multi-mode Fiber Q-ODC OM3 Giga 550M ; w/8 PoE at/af EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation
- **TPGS-R6608XFT-8-QSM-54-WVI.....P/N: 8361-5271**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G single-mode Fiber Q-ODC OM3 up to 40KM ; w/8 PoE at/af EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation
- **TPGS-R6608XFT-10-QMM-54-WVI.....P/N: 8361-528**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G multi-mode Fiber Q-ODC OM3 Giga 550M ; w/10 PoE at/af incl.2 10GT EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation
- **TPGS-R6608XFT-10-QMM-54-WVI-BT-C.....P/N: 8361-52811**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G multi-mode Fiber Q-ODC OM3 Giga 550M ; w/10 PoE at/af incl.2 10GT EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation; one pair Copper bypass; w/ conformal coating
- **TPGS-R6608XFT-10-QSM-54-WVI.....P/N: 8361-5282**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G single-mode Fiber Q-ODC OM3 up to 40KM ; w/10 PoE at/af incl.2 10GT EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation
- **TPGS-R6608XFT-12-QMM-54-WVI.....P/N: 8361-529**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G multi-mode Fiber Q-ODC OM3 Giga 550M ; w/12 PoE at/af incl.4 10GT EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation
- **TPGS-R6608XFT-12-QSM-54-WVI.....P/N: 8361-5291**
8 10/100/1000T + 4 10G Copper M12 X-coded + 2 1G/10G single-mode Fiber Q-ODC OM3 up to 40KM ; w/12 PoE at/af incl.4 10GT EN50155 OS4 PoE Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40C~70C/-40F~158F ; IP54 housing w/ PoE galvanic isolation

OPTIONAL ACCESSORIES

Software package

- **OS4 – L3L P/N: 9000-110**
OS4 software platform with Layer 3 Lite functions (please check Lantech software data sheet for details)
- **OS4 – IEC61375-2-5 P/N: 9000-111**
OS4 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function (please check Lantech software data sheet for details)
- **OS4 – L3* P/N: 9000-112**
OS4 software platform with Layer 3 functions (please check Lantech software data sheet for details)
- **OS4 – R-NAT P/N: 9000-113**
OS4 software platform with R-NAT functions (please check Lantech software data sheet for details)

M12 Connector & Cable

Connector

- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-08A(M)-180** 8 pin M12 (Male) A-coded 180 degree crimp type connector for reset/console/USB
- **ECONM12-05A(M)-C-180** 5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

Cable

■ ECONM12-4P(F)1.5M CABLE	4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
■ ECONM12-08M2-CONSOLE	8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm
■ ECABM12X83MSTP	8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
■ ECABMO02-QOP2-3.0-MM-OM3	Q-ODC 2 plug/LC multimode fiber, MM-OM3, 300cm
Others	
■ USB adapter	8pin M12 (Male) A-coded 180 degree M12 to USB 2.0 interface adapter, 8cm

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2020 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at any time, without notice.